



- NOTES:**
- 4-FT. HT. CHAIN-LINK FENCE WITH TOP AND BOTTOM RAIL IS USED AS GUARD RAIL AT RETAINING WALL LOCATIONS.
 - SHOP DRAWING SUBMITTAL SHALL CONFIRM THAT THE FENCE COMPLIES WITH 2018 IBC SECTION 1015 & 1607.8 (GENERALLY DESCRIBED BELOW).
 - TOP BAR & HAND RAIL: RESIST A LINEAR LOAD OF 50 POUNDS PER LINEAR FOOT & RESIST 200LB CONCENTRATED LOAD.
 - 4 INCH DIAMETER SPHERE CANNOT PASS THROUGH ANY OPENING UP TO A HEIGHT OF 3 INCHES (VERTICAL PICKETS/POST OR BOTTOM RAIL).
 - CONSTRUCTION OF UTILITIES SHOULD BE COMPLETED COINCIDENTLY WITH THE CONSTRUCTION OF THE RETAINING WALL(S). THERE WILL BE NO TRENCHING ALLOWED ONCE GEOGRID IS PLACED AND WALL IS CONSTRUCTED; UNDER NO CIRCUMSTANCE SHOULD THE GEOGRID BE SEVERED.

2 TYPICAL RETAINING WALL CROSS SECTION (NOT TO SCALE)

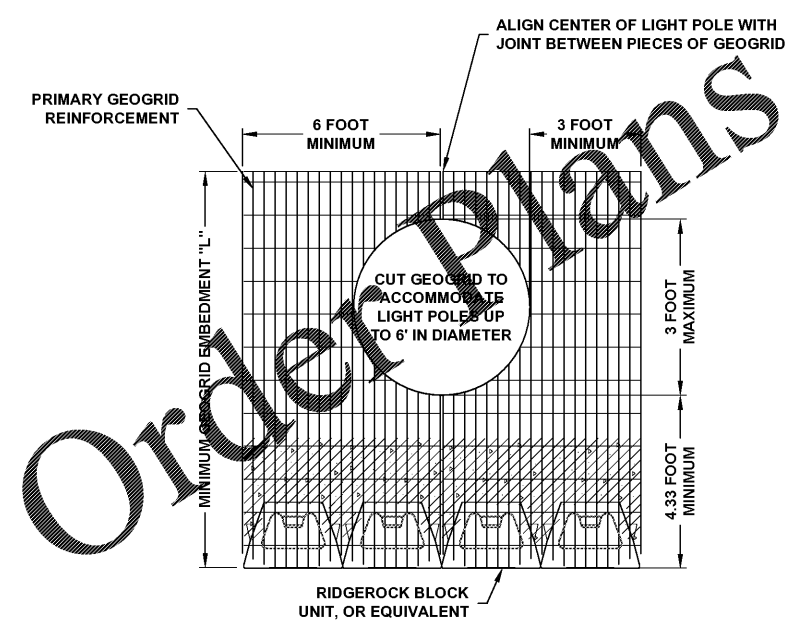

GEOGRID DETAIL AT LIGHT POLE LOCATIONS (N.T.S.)

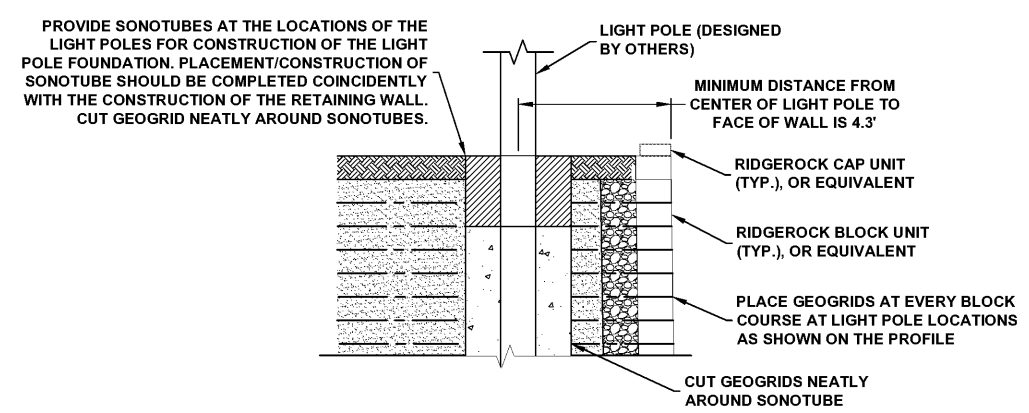

GEOGRID PLACEMENT AT LIGHT POLE LOCATIONS

