



SLEEVE-IT™ SD1 COMPONENTS


- NOTES:**
- 4-FT. HT. CHAIN-LINK FENCE WITH TOP AND BOTTOM RAIL IS USED AS GUARD RAIL AT RETAINING WALL LOCATIONS.
 - SHOP DRAWING SUBMITTAL SHALL CONFIRM THAT THE FENCE COMPLIES WITH 2018 IBC SECTION 1015 & 1607.8 (GENERALLY DESCRIBED BELOW).
 - TOP BAR & HAND RAIL: RESIST A LINEAR LOAD OF 50 POUNDS PER LINEAR FOOT & RESIST 200LB CONCENTRATED LOAD.
 - 4 INCH DIAMETER SPHERE CANNOT PASS THROUGH ANY OPENING UP TO A HEIGHT OF 34 INCHES. (VERTICAL PICKETS/POST OR BOTTOM RAIL)
 - CONSTRUCTION OF UTILITIES SHOULD BE COMPLETED COINCIDENTLY WITH THE CONSTRUCTION OF THE RETAINING WALL(S). THERE WILL BE NO TRENCHING ALLOWED ONCE GEOGRID IS PLACED AND WALL IS CONSTRUCTED; UNDER NO CIRCUMSTANCE SHOULD THE GEOGRID BE SEVERED.

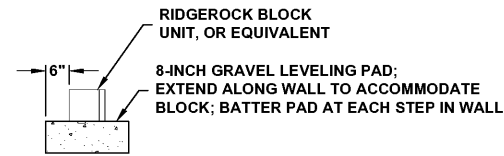


GRAVEL LEVELING PAD DETAIL

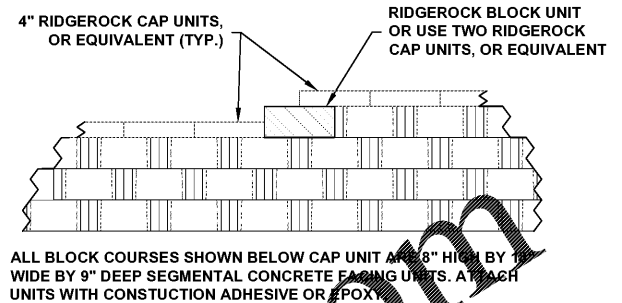


CAP STEP DETAIL

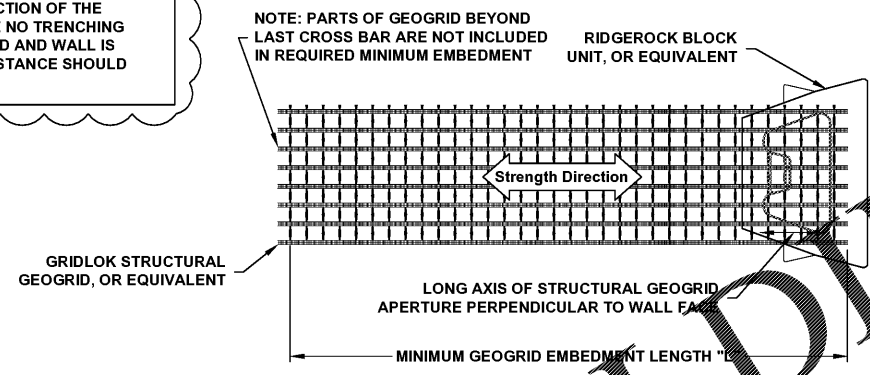


GEOGRID ORIENTATION ON BLOCK

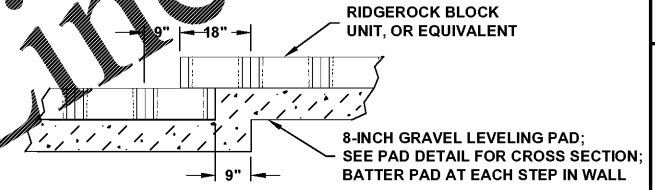


LEVELING PAD STEP DETAIL

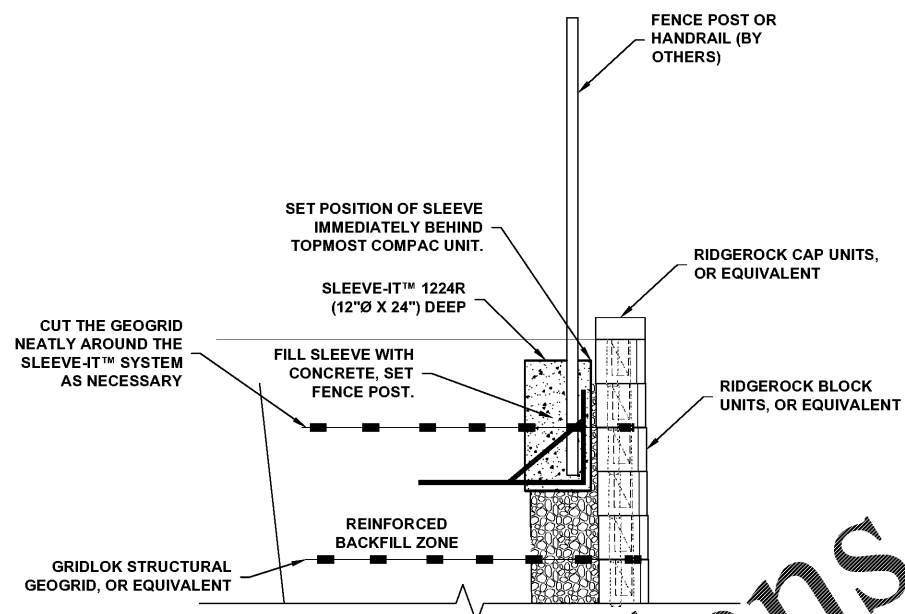

FENCE POST INSTALLATION USING SLEEVE-IT™ 1224R

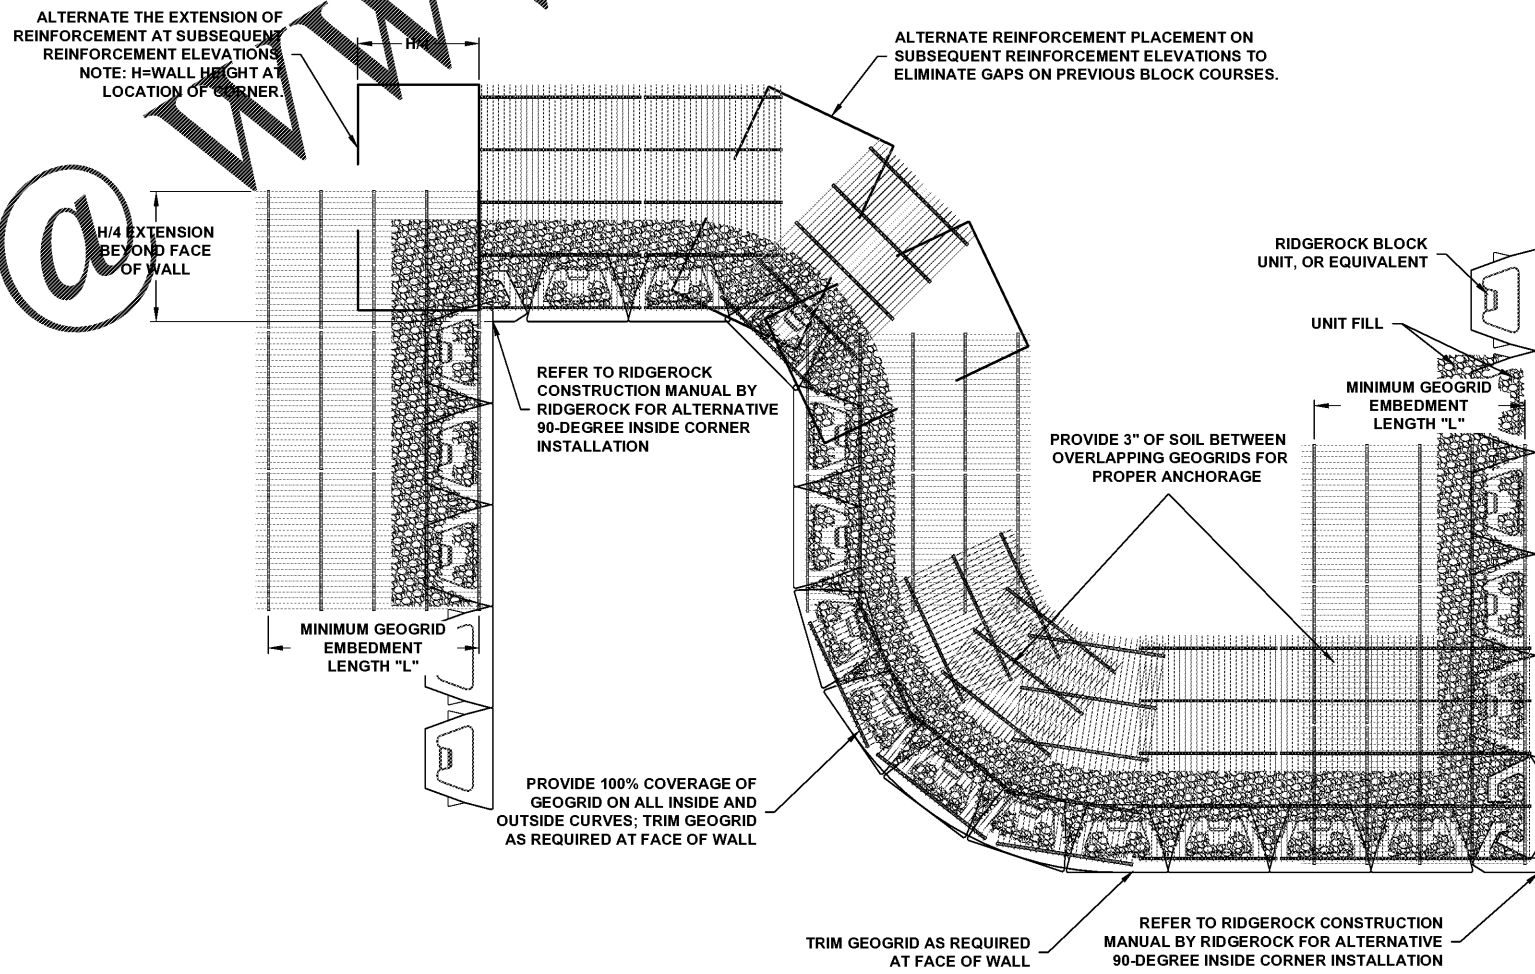

GEOGRID PLACEMENT ON WALLS, CURVES AND CORNERS

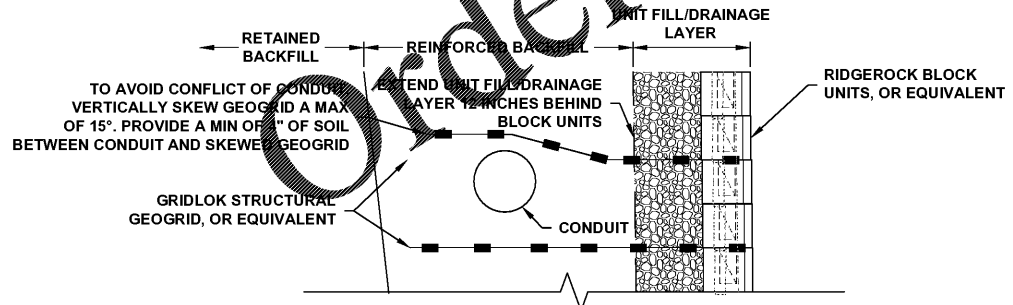

LIMITS OF UNIT FILL AND REINFORCED BACKFILL

