



FLOOR PLAN KEYNOTES

- 1 WALL MOUNTED LCD TV G.C. TO PROVIDE APPROPRIATE BLK'G AT 72" A.F.F. TV SHALL NOT PROTRUDE INTO SPACE MORE THAN 4" MAX.
- 2 LOCKERS
- 3 SHELVING BY MILLWORK VENDOR
- 4 SOFFIT ABOVE - REFER TO SHEET A7.1
- 5 ALUMINUM FRAMED TRANSOM LIGHT ABOVE. SEE AL-3 ON SHEET A3.0 AND ADDITIONAL INFO
- 6 ALUMINUM FRAMED TRANSOM LIGHT ABOVE. SEE AL-2 ON SHEET A3.0 AND ADDITIONAL INFO
- 7 FILING CABINETS
- 8 8' SHELVES
- 9 WALL MOUNTED LCD TV G.C. TO PROVIDE APPROPRIATE BLK'G AT 60" A.F.F. TV SHALL NOT PROTRUDE INTO SPACE MORE THAN 4" MAX.
- 10 ARTICULATOR RACK
- 11 PLASTER CART
- 12 PHONE CABINET
- 13 ELECTRICAL PANEL
- 14 PHONE BOARD
- 15 BOTTLE FILLING STATION
- 16 REFRIGERATOR BY OTHERS
- 17 EQUIPMENT BY OTHERS
- 18 (4) FIRE EXTINGUISHER BY TENANT - SEE DETAIL 7/A5.1
- 19 EXISTING EXTERIOR BUILDING SHELL WALL TYP.
- 20 PLUMB. CONTRACTOR TO COORDINATE CLEARANCES REQ'D FOR ADMI SUPPLIED EQUIPMENT PRIOR TO INSTALLING WATER HEATER / MOP SINK
- 21 WATER DISTILLER
- 22 TENANT'S CONTRACTOR TO COORDINATE ALL EQUIPMENT BLOCKING & UTILITIES PRIOR TO INSTALLING 5/8" GYP. BD. - GYP. BD. TO BE TAPE AND SANDED TO ACCEPT TENANT'S WALL FINISHES
- 23 PROVIDE PROPER WALL FRAMING AS REQ'D FOR POCKET DOOR. INSTALL ALUMINUM DOOR FRAME REQ'D FOR POCKET DOOR. SEE DOOR SCHEDULE FOR TYPE OF DOOR AND HARDWARE.
- 24 EXISTING 1 HOUR FIRE BARRIER (UL# U419) TENANT DEMISING WALL. CONTRACTOR TO VERIFY WALL RATING WITH SHELL DOCUMENTS AND PROVIDE CORRECT FIRE TREATED BLOCKING & FIRE CAULK AT ALL PENETRATIONS TO MAINTAIN RATING AS REQ'D. CONTRACTOR TO INSTALL 1 LAYER(S) 5/8" GYP. BD. ON TENANT SIDE. GYP. BD. TO BE TAPE AND SANDED TO ACCEPT TENANT'S WALL FINISHES. SEE SHEET A6.2 FOR FIRE WALL JOINTS & PENETRATIONS.
- 25 SAWCUT AND REMOVE EXISTING FLOOR SLAB & REPLACE AS REQ'D (IF APPLICABLE) FOR UTILITY BOXES G.C. TO COORDINATE - SEE DETAILS 5/MD & 7/MD
- 26 TENANT'S G.C. TO PROVIDE AND INSTALL MASTER LOCK 5401D WALL-MOUNTED KEY STORAGE BOX ON EXTERIOR OF BUILDING AT 48" TO CENTER. PLACE AT RIGHT OF LEFT OF DOOR (PREFERRED LOCATION TO BE ON LATCH SIDE OF DOOR)
- 27 PROVIDE WOOD BLOCKING AS REQ'D FOR UPPER CABINETS AT POCKET DOOR LOCATION. SEE DETAIL 3/A7.2
- 28 SEE AL-1 ALUMINUM ELEVATION ON SHEET A3.0 FOR ADDITIONAL INFO
- 29 SEE AL-4 ALUMINUM ELEVATION ON SHEET A3.0 FOR ADDITIONAL INFO
- 30 50-SWHP-W WATER HEATER WALL HUNG SHELF. SEE DETAIL 6/A5.2 FOR BACKING - SEE PLUMBING FOR MORE INFORMATION
- 31 CHAIR LIFT RAIL W/ POSTS AT EACH END - SEE SHEETS A7.1 AND A7.2 FOR MORE INFORMATION
- 32 GYP. BOARD BY TENANT - GYP. TO EXTEND TO DECK AT PERIMETER WALLS. SEE DETAIL 1/A1.1
- 33 INSTALL FRP (FIBER-REINFORCED PLASTIC) BEHIND THE SINK AND PLASTER AREA FROM FLOOR TO CEILING.
- 34 G.C. TO VERIFY REAR DOOR HARDWARE HAS ADAMS RITE 4590 LATCH PADDLE DEVICE & TO PROVIDE IF IT DOES NOT.
- 35 ALL FLOOR DRAINS BOXED OUT 3"X3" & POURED BACK AFTER SLAB SO PROPER SLOPE IN FLOOR IS ESTABLISHED. SEE PLUMBING FOR MORE INFORMATION.
- 36 GC TO VERIFY IF A KNOX BOX IS EXISTING. IF NOT, LANDLORD IS TO PROVIDE AND COORDINATE LOCATION WITH FIRE MARSHAL.
- 37 PROVIDE GYP. BD. RETURN TO FRAME. PROVIDE VINYL J TRIM & SEALANT (TYP.)
- 38 BLACK SPANDREL GLAZING (FULL HEIGHT) BY LANDLORD
- 39 INFILL WINDOW OPENING WITH STUD FRAMING AND GYP. BD. TO FULL HEIGHT AS REQ'D TO MATCH ADJACENT WALLS
- 40 BLACK SPANDREL GLAZING TO 7'-0" A.F.F. BY LANDLORD
- 41 INFILL WINDOW OPENING WITH STUD FRAMING AND GYP. BD. TO 7'-0" A.F.F. AS REQ'D TO MATCH ADJACENT WALLS
- 42 WALL INFILL TO BE INSULATED WITH BATT INSULATION BY ASPEN GC
- 43 6' SHELVING
- 44 HOLD STUD FRAMING TIGHT TO COLUMN AS POSSIBLE
- 45 3' SHELVING
- 46 SEE AL-6 ALUMINUM ELEVATION ON SHEET A3.0 FOR ADDITIONAL INFO
- 47 4' SHELVING
- 48 SEE AL-7 ALUMINUM ELEVATION ON SHEET A3.0 FOR ADDITIONAL INFO


MILWORK NOTES

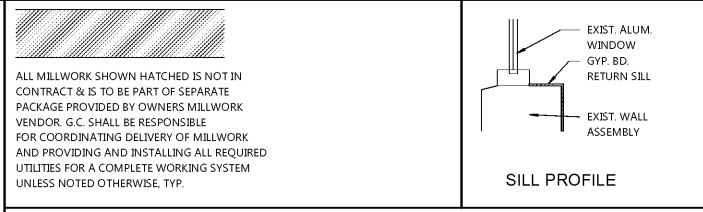

PARTITION TYPES

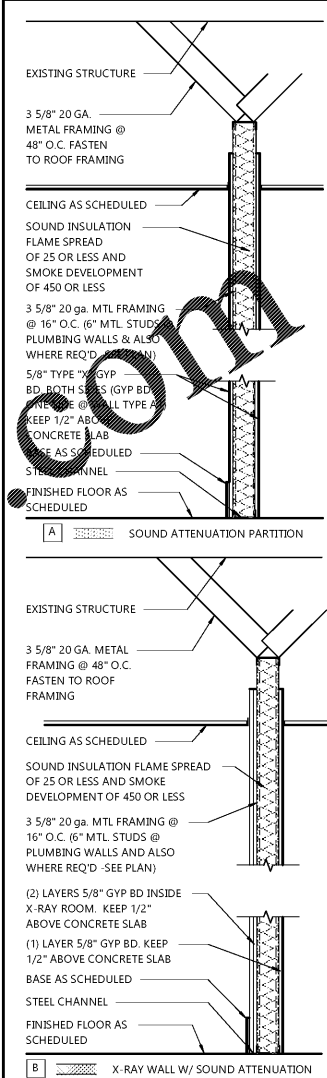


NOTES:
 WALL THICKNESSES SHOWN AS NOMINAL
 5\"/>

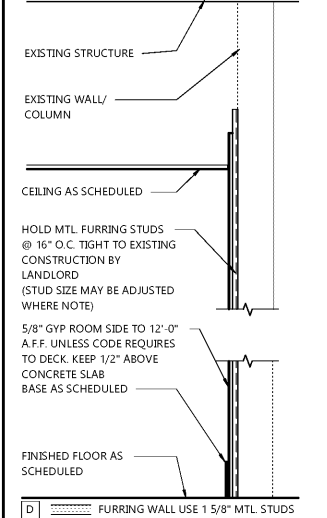

1 GYP. @ PERIMETER WALLS
 A1.1 NOT TO SCALE

Order Plans @

WWW.DLINE



PROJECT INFORMATION

TENANT BUILD-OUT FOR:
ASPEN DENTAL
 660 W. LINTON BLVD., STE. 380 • DELRAY BEACH, FL 33444

PROFESSIONAL SEAL

Blank area for professional seal.

SHEET DATES

SHEET ISSUE	MAY 29, 2019
REVISIONS	

JOB NUMBER

1931400

SHEET NUMBER

A1.1