


SOIL TESTING NOTE:
 *G.C. SHALL HIRE A SOIL TESTING AGENCY TO PERFORM A COMPACTION TEST OF LANDLORD DELIVERED PAD DURING & AFTER UNDERGROUND UTILITY INSTALLATION. G.C. SHALL NOT INSTALL UNDERGROUND UTILITIES IN LANDLORD DELIVERED PAD UNTIL COMPACTION REPORTS HAVE BEEN RECEIVED FROM THE LANDLORD, AND PROPER COMPACTION HAS BEEN MET. ALL REPORTS SHALL BE SUBMITTED TO ADM.

GENERAL NOTES:
 *ALL DIMENSIONS ARE TAKEN OFF THE FINISHED FACE OF THE PERIMETER WALL, AND MEASURED TO FIXTURE LOCATION AND/OR CENTER OF WALL PARTITIONS.
 *ALL VACUUM LINES SHALL BE ROUTED UNDERGROUND WHENEVER POSSIBLE. P.C. MAY USE ANY WALL OR KNEEWALL UNTIL THERE IS NO MORE WALL. AT THAT POINT THE VACUUM SHALL DROP UNDERGROUND.
 U/C = UTILITY CENTER

KEYNOTES:
 1 POWER TO BE BROUGHT UNDER COUNTER THROUGH 3/4" POWER CONDUIT. 2" DATA CONDUIT TO BE RUN UNDERGROUND. (REFER TO ELECTRICAL DRAWINGS & DETAIL 3/E0.2)
 2 POWER TO BE BROUGHT THROUGH 3/4" POWER CONDUIT. 2" DATA CONDUIT TO BE RUN UNDERGROUND. (REFER TO ELECTRICAL DRAWINGS)
 3 SEE "SLAB LEAVE OUT AT FLOOR DRAIN DETAIL" #2/MD.1 FOR ADDITIONAL REQUIREMENTS.
 4 SEE "FLOOR BOX DETAIL" #5/MD FOR ADDITIONAL REQUIREMENTS.

UNDERGROUND UTILITY RISER PLAN
 SCALE: 1/4" = 1'-0"

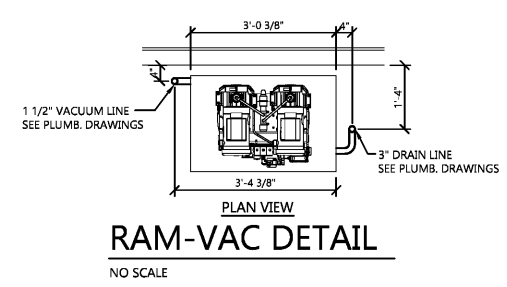

UNDERGROUND UTILITY RISER PLAN AND DETAIL

EXCEL
 ARCHITECTS • ENGINEERS • SURVEYORS
Always a Better Plan
 100 Camelot Drive
 Fond Du Lac, WI 54935
 Phone: (920) 926-9800
 www.EXCELENGINEER.com

COLLABORATION
AspenDental

PROJECT INFORMATION

TENANT BUILD-OUT FOR:
ASPEN DENTAL
 660 W. LINTON BLVD., STE. 380 • DELRAY BEACH, FL 33444

PROFESSIONAL SEAL

SHEET DATES

ISSUE DATE	MAY 29, 2019
REVISIONS	

JOB NUMBER
 1931400

SHEET NUMBER
U1.1

Order Plans

WWW.LDLINE.COM