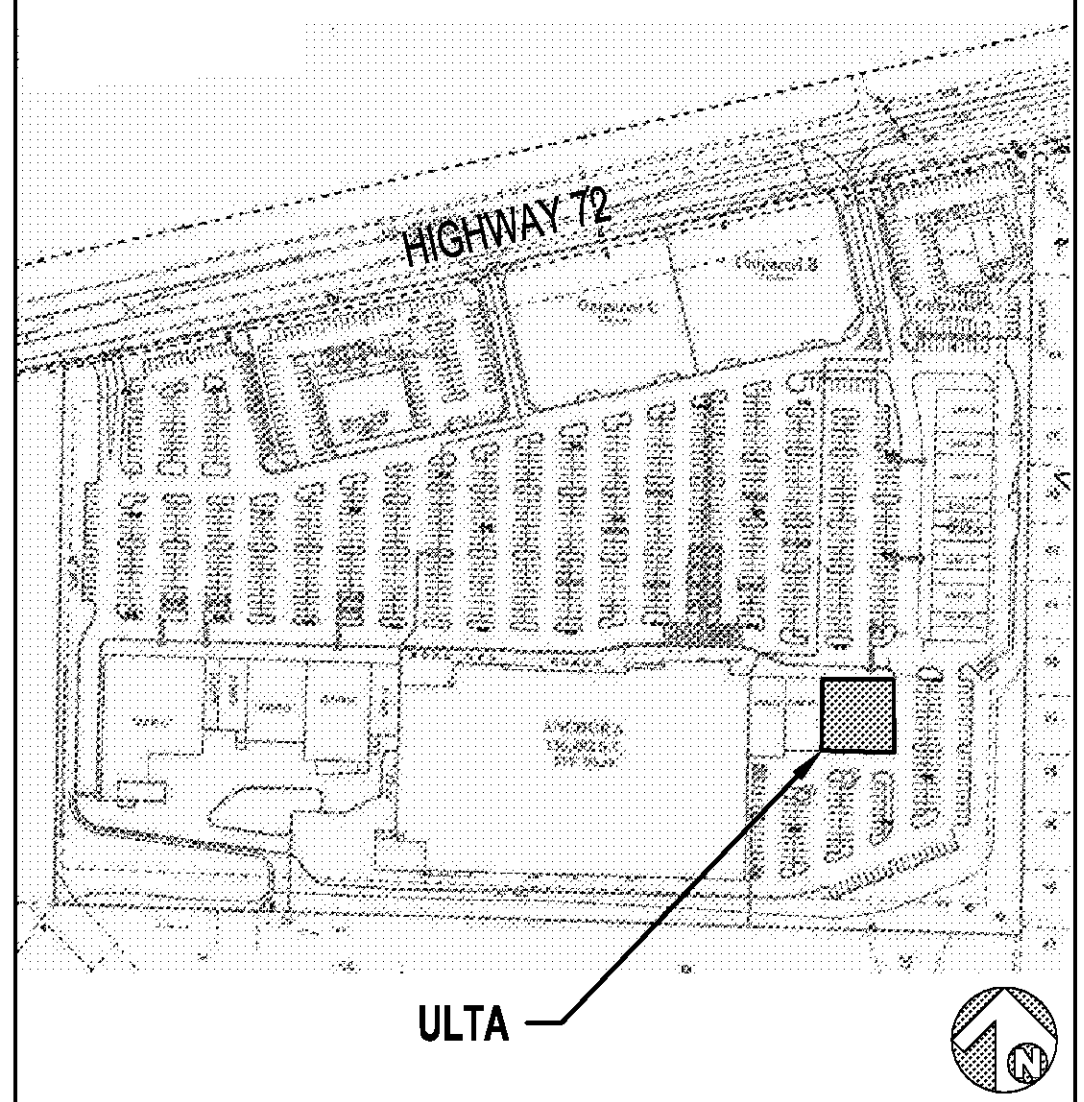


## - SITE MAP
SCALE N.T.S.

SITE LOCATION:
STORE NO. 1613
SHOPPES OF MADISON
SUITE C
8201 HIGHWAY 72 WEST
MADISON, AL 35758

LANDLORD
INLAND GROUP
2901 BUTTERFIELD ROAD
OAK BROOK, IL 60523
T: (630) 586-6553
CONTACT: DANIEL KWIATKOWSKI
EMAIL: DANIEL.KWIATKOWSKI@INLANDGROUP.COM

TENANT PROJECT MANAGER
ULTA BEAUTY
TALLGRASS CORPORATE CENTER
1000 REMINGTON BLVD., SUITE 120
BOLINGBROOK, IL 60440
T: (772) 473-2893
CONTACT: GARY KAY
EMAIL: GKAY@ULTA.COM

ARCHITECT
ROBERT G. LYON AND ASSOCIATES
5100 RIVER ROAD, SUITE 125
SCHILLER PARK, IL 60176
T: (847) 671-7452
F: (847) 671-4200
CONTACT: JOSEPH GEOGHEGAN
PLEASE CONTACT PROJECT
COORDINATOR FOR ALL INQUIRIES.

RGLA PROJECT MANAGER
RGLA SOLUTIONS, INC.
5100 RIVER ROAD, SUITE 125
SCHILLER PARK, IL 60176
T: (847) 916-2743
F: (847) 671-4200
CONTACT: PAUL KAZMIERCZAK
EMAIL: PKAZMIERCZAK@RGLA.COM

MEP ENGINEER
HENDERSON ENGINEERS INC.
8345 LENEXA DRIVE, SUITE 300
LENEXA, KANSAS 66214-695
T: (913) 307 5300
F: (913) 307 5400
WWW.HENDERSONENGINEERS.COM
CONTACT: ROBERT BOWLIN

STRUCTURAL ENGINEER
WALLACE ENGINEERING STRUCTURAL
CONSULTANTS, INC.
1741 MCGEE STREET
KANSAS CITY, MO 64108
T: (816) 421-8282
CONTACT: MICHAEL LANCEY

## - PROJECT CONTACTS
SCALE NONE

ULTA® BEAUTY

# SHOPPES OF MADISON
# MADISON, AL - STORE #1613
# INTERIOR FINISH OF NEW ULTA STORE

THE INTENT OF THE SCOPE CONTAINED WITHIN THESE DOCUMENTS RELATES TO THE INTERIOR REMODELING /BUILD-OUT OF A MERCANTILE/ INTERIOR SPACE CONTAINED WITHIN AN EXISTING SHELL BUILDING. THE ARCHITECT HAS NOT INSPECTED THE CONDITIONS OR THE INTEGRITY OF THE EXISTING SHELL BUILDING AND SHALL NOT ASSUME RESPONSIBILITY OR LIABILITY FOR SAME. THE RESPONSIBILITY AND LIABILITY FOR THE EXISTING SHELL BUILDING CONDITIONS AND INTEGRITY, AND FOR THE CONFORMANCE OF THE EXISTING BUILDING SHELL TO ALL APPLICABLE LOCAL CODES AND ENVIRONMENTAL REQUIREMENTS, IS SOLELY THAT OF OTHERS, AND NOT THAT OF THE ARCHITECT. THE ARCHITECT'S SCOPE OF WORK IS STRICTLY LIMITED SOLELY TO THE INTERIOR BUILD-OUT OF AN EXISTING INTERIOR SPACE LOCATED WITHIN AN EXISTING SHELL BUILDING.

## - SCOPE OF WORK STATEMENT
SCALE NONE

| | |
|---|---|
| A | AREA |
| A.B. | ANCHOR BOLT |
| A.C.I. | AMERICAN CONCRETE INSTITUTE |
| ACOUST. | ACOUSTICAL |
| A.D.A. | AMERICANS WITH DISABILITIES ACT |
| ADH. | ADHESIVE |
| ADJ. | ADJACENT |
| A.F.F. | ABOVE FINISHED FLOOR |
| AHJ | AUTHORITY HAVING JURISDICTION |
| ALT. | ALTERNATE |
| AL./ALUM. | ALUMINUM |
| AMP. | AMPERE |
| ANOD. | ANODIZED |
| A.N.S.I | AMERICAN NATIONAL STANDARDS INSTITUTE |
| APPROX. | APPROXIMATE |
| ARCH. | ARCHITECT |
| A.S.T.M | AMERICAN SOCIETY FOR TESTING MATERIALS |
| AVG. | AVERAGE |
| B/O | BOTTOM OF |
| BD. | BOARD |
| BEV. | BEVERAGE |
| BLDG. | BUILDING |
| B.F.P. | BACKFLOW PREVENTER |
| BLK. | BLACK |
| BLK'G. | BLOCKING |
| BRG. | BEARING |
| BRKT. | BRACKET |
| BTM. | BOTTOM |
| BTN. | BETWEEN |
| CAB. | CABINET |
| C.F.M. | CUBIC FEET PER MINUTE |
| C.G.F. | COMPACTED GRANULAR FILL |
| C.J. | CONTROL JOINT |
| C.L. | CENTER LINE |
| CLG. | CEILING |
| CLOS. | CLOSET |
| CLR. | CLEAR |
| C.M.U. | CONCRETE MASONRY UNIT |
| CNTR. | COUNTER |
| CO. | COMPANY |
| COL. | COLUMN |
| CONC. | CONCRETE |
| COND. | CONDUIT |
| CONN. | CONNECTION |
| CONSTR. | CONSTRUCTION |
| CONT. | CONTINUOUS |
| CONTR. | CONTRACTOR |
| CORP. | CORPORATE |
| C.T. | CERAMIC TILE |
| C.S.I. | CONSTRUCTION SPECIFICATIONS INSTITUTE |
| CU. | CUBIC |
| CUST. | CUSTOMER |
| D. | DEPTH |
| DBL. | DOUBLE |
| DEG. | DEGREES |
| DIA. | DIAMETER |
| DIM. | DIMENSION |
| DISC. | DISCONNECT |
| DN. | DOWN |
| D.O. | DOOR OPENING |
| DR. | DOOR |
| DTL. | DETAIL |
| DWG. | DRAWINGS |
| DWLS. | DOWELS |
| EA. | EACH |
| E.I.F.S. | EXTERIOR INSULATION FINISH SYSTEM |
| ELEC./ELECT. | ELETRIC/-AL |
| ELEV./EL. | ELEVATION |
| EMPL. | EMPLOYEE |
| ENG. | ENGINEER/-ED |
| EQ. | EQUAL |
| EQUIP. | EQUIPMENT |
| ETC. | ET CETERA |
| EXIST. | EXISTING |
| EXP. | EXPANSION/ EXPOSED |
| EXT. | EXTERIOR |
| F.A. | FIRE EXTINGUISHER |
| F.D. | FLOOR DRAIN |
| FDN. | FOUNDATION |
| FIN. | FINISH |
| FIXT. | FIXTURE |
| FLR. | FLOOR |
| F.O. | FRAMED OPENING |
| F.R.P. | FIBERGLASS REINFORCED PLASTIC |
| FT. | FEET/FOOT |
| FTG. | FOOTING |
| GA. | GAGE/GAUGE |
| G.A. | GENERAL CONTRACTOR |
| GALV. | GALVANIZED |
| GD. | GRADE |
| GL. | GLASS |
| GYP. | GYPSUM |
| H. | HIGH |
| H.C. | HANDICAP ACCESSIBLE |
| H.C. | HOLLOW CORE |
| H.D. | HIGH DENSITY |
| HDR. | HEADER |
| HDW. | HARDWARE |
| HDWD. | HARDWOOD |
| H.M. | HOLLOW METAL |
| H.P. | HIGH OUTPUT |
| HORIZ. | HORIZONTAL |
| H.P. | HIGH POINT |
| H.R.C. | HEATING AND REFRIGERATION CONTRACTOR(S) |
| HT. | HEIGHT |
| H.V.A.C | HEATING, VENTILATION, AIR CONDITION |
| HZ. | HERTZ |
| I.G. | ISOLATED GROUND |
| IN. | INCHES |
| INCL. | INCLUDED |
| INFO. | INFORMATION |
| INSTL. | INSTALLATION/INSTALLED |
| INSUL. | INSULATION |
| INT. | INTERIOR |
| J.BOX | JUNCTION BOX |
| JST. | JOIST |
| JT. | JOINT |
| K.S.I. | KIP PER SQUARE INCH |
| LAM. | LAMINATE |
| LAV. | LAVATORY |
| LBF. | POUNDS FORCE |
| LBS. | POUNDS |
| L.F. | LINEAL FOOT |
| L.G.C. | LANDLORD'S GENERAL CONTRACTOR |
| L.P. | LOW POINT |
| LL | LANDLORD |
| MA. | MILLIAMPERE |
| MATL. | MATERIAL |
| MAX. | MAXIMUM |
| MECH. | MECHANICAL |
| MFG./MANUF. | MANUFACTURER |
| MIN. | MINIMUM |
| MISC. | MISCELLANEOUS |
| MM. | MILLIMETER |
| M.O. | MASONRY OPENING |
| M.R. | MOISTURE RESISTANT |
| MSRY. | MASONRY |
| MTD. | MOUNTED |
| MTL. | METAL |
| N/A | NOT APPLICABLE |
| N.I.C. | NOT IN CONTRACT |
| NOM. | NOMINAL |
| NO./NUM. | NUMBER |
| N.T.S. | NOT TO SCALE |
| O.A. | OVERALL |
| O.C. | ON CENTER |
| O.D. | OUTSIDE DIAMETER |
| O.H. | OPPOSITE HAND |
| OPNG. | OPENING |
| OPT. | OPTIONAL |
| OPP. | OPPOSITE |
| P.C. | PERSONAL COMPUTER |
| P.C.C | PRE-CAST CONCRETE |
| PH.BD. | PHONE BOARD |
| PKG. | PARKING |
| PL. | PLATE |
| P.L. | PLASTIC LAMINATE |
| PLMB. | PLUMBING |
| PLYWD. | PLYWOOD |
| PNL. | PANEL |
| P.O.S. | POINT OF SALE |
| PR. | PAIR |
| PREP. | PREPARATION/PREPARED |
| P.S.F | POUNDS PER SQUARE FOOT |
| P.S.I. | POUNDS PER SQUARE INCH |
| PT. | PART/ POINT |
| P.V.C. | POLY VINYL CHLORIDE |
| PVMT. | PAVEMENT |
| QTY. | QUANTITY |
| R.A. | RETURN AIR |
| R./RAD. | RADIUS |
| R.D. | ROOF DRAIN |
| RECPT. | RECEPTACLE |
| REINF. | REINFORCING |
| REQ'D. | REQUIRED |
| RM. | ROOM |
| R.O. | ROUGH OPENING |
| R.R. | RESTROOM |
| R.T.U. | ROOF TOP UNIT |
| SAN. | SANITARY |
| S.C. | SOLID CORE |
| SCHD. | SCHEDULE |
| SECT. | SECTION |
| SERV. | SERVICE |
| SEV. | SEVER |
| SF. | STOREFRONT |
| SHT. | SHEET |
| SIM. | SIMILAR |
| S.J. | SAWCUT JOINT |
| SM. | SMALL |
| SPECS. | SPECIFICATIONS |
| SPRINK. | SPRINKLERS |
| SQ. | SQUARE |
| SQ. FT. | SQUARE FEET |
| S.S., S/S | STAINLESS STEEL |
| STD. | STANDARD |
| STL. | STEEL |
| STN. | STATION |
| STRUCT. | STRUCTURE/-AL |
| SUPPL. | SUPPLY/-IED |
| SUSP. | SUSPENDED |
| T.O. | TOP OF |
| TB. | THROUGHBOLT |
| T&B | TOP AND BOTTOM |
| T&G | TONGUE AND GROOVE |
| TEMP. | TEMPERED |
| T.G.C. | TENANT GENERAL CONTRACTOR |
| THRU | THROUGH |
| TYP. | TYPICAL |
| U.L. | UNDERWRITERS LABORATORIES |
| U.N.O. | UNLESS NOTED OTHERWISE |
| UV. | ULTRAVIOLET |
| V. | VOLT/ VOLTAGE |
| V.B. | VAPOR BARRIER |
| V.C. | VOLUME CONTROL |
| V.C.T. | VINYL COMPOSITION TILE |
| V.I.F. | VERIFY IN FIELD |
| V.P. | VENT PIPE |
| VERT. | VERTICAL |
| W. | WIDE |
| W/-W/O | WITH/WITHOUT |
| W.B. | WALL BASE |
| W.B.C. | WHITE BOX CONTRACTOR |
| W.C. | WATER CLOSET |
| WD. | WOOD |
| WDW. | WINDOW |
| W.H. | WATER HEATER |
| WK. | WORK |
| WP. | WATERPROOF |
| WT. | WEIGHT |
| W.W.F | WELDED WIRE FABRIC |

## - ABBREVIATIONS
SCALE NONE

1. IF SIGNIFICANT DISCREPANCIES OR CONFLICTS IN THE DETAILS OR DIMENSION ARISE, OR IF UNFORESEEN CONDITIONS IN THE EXISTING BUILDING IMPAIR THE ABILITY TO PERFORM THE WORK AS DESCRIBED AND/OR DETAILED. THEN REPORT SUCH OCCURRENCES TO THE ARCHITECT BEFORE PROCEEDING.
2. DO NOT SCALE DRAWINGS- WRITTEN DIMENSIONS TAKE PRECEDENT.
3. ALL THINGS SHOWN ARE NEW AND PROVIDED BY TENANT GENERAL CONTRACTOR UNLESS OTHERWISE NOTED.
4. ALL WALL CONSTRUCTION FACING RESTROOM AREAS MUST UTILIZE MOISTURE RESISTANT GYPSUM BOARD.
5. ALL DOORS TO BE KEYLESS IN DIRECTION OF EGRESS.
6. DOORS SHALL HAVE A 5 SECOND MINIMUM CLOSING TIME FROM 90°- 12° OPEN. MAXIMUM EFFORT TO OPERATE DOORS SHALL NOT EXCEED:
   A. 5.0 L.B.F. (22.2 N) FOR INTERIOR DOORS WITHOUT CLOSURES.
   B. 8.5 L.B.F. (38 N) FOR EXTERIOR DOORS.
   C. 15 L.B.F. (67 N) FOR ALL OTHER DOORS.
7. DOORS INDICATED AS PART OF THE REQUIRED MEANS OF EGRESS SHALL HAVE HARDWARE WHICH IS READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY, SPECIAL KNOWLEDGE OR EFFORT.
8. ALL WALL AND CEILING FINISHES TO BE CLASS B OR BETTER, FLAME SPREAD 26-75 WITH MAXIMUM SMOKE DEVELOPED OF 450.
9. ALL INTERIOR TRIM TO BE CLASS C, FLAME SPREAD 76-200 WITH MAXIMUM SMOKE DEVELOPED OF 450.
10. FLOOR COVERINGS TO HAVE A FLAME SPREAD RATING NOT TO EXCEED 75.
11. ALL COMBUSTIBLE INTERIOR FINISH AND TRIM ITEMS ARE TO BE APPLIED DIRECTLY TO A NON-COMBUSTIBLE BASE.
12. PROVIDE FIRE EXTINGUISHERS AS REQUIRED PER APPLICABLE CODES AND COORDINATE EXACT LOCATION WITH FIRE MARSHAL.
13. PROVIDE AND INSTALL OCCUPANCY SIGN IN A CONSPICUOUS LOCATION IN ACCORDANCE WITH STATE AND LOCAL CODES.
14. ALL EXTERIOR WORK AND BUILDING SHELL WORK, INCLUDING THE STRUCTURAL INTEGRITY OF EXTERIOR WALLS, AND ROOF AND ITS ABILITY TO SUPPORT THE TENANTS AWNING AND/OR SIGNAGE OR ANY OTHER ELEMENTS, IS THE RESPONSIBILITY OF THE LANDLORD. ALL OF THE WORK SHALL BE HANDLED UNDER SEPARATE PERMIT AND IS NOT A PART OF THESE PERMIT DRAWINGS. THIS SHALL INCLUDE VERIFICATION OF ALL EXISTING CONDITIONS AND BUILDING STRUCTURE THAT IS A PART OF THE LANDLORD'S WORK AS DESCRIBED IN THE LEASE AGREEMENT BETWEEN ULTA AND LANDLORD.
15. SIGNAGE AS SHOWN IN THESE DRAWINGS IS SCHEMATIC ONLY FOR ILLUSTRATION PURPOSES AND DOES NOT IMPLY OR DESCRIBE ANY MEANS, METHODS, OR DETAILS PERTAINING TO INSTALLATION OF THE AWNING OR SIGNAGE. IT SHALL BE SOLELY THE SIGN CONTRACTOR'S RESPONSIBILITY TO DESIGN FABRICATE, AND INSTALL THE SIGN UNDER SEPARATE PERMIT, AND ALL STRUCTURAL CONSIDERATIONS SHALL BE COORDINATED BETWEEN THE SIGNAGE CONTRACTOR, LANDLORD, AND HIS DESIGN PROFESSIONALS. THE AWNING/SIGN CONTRACTOR SHALL SUBMIT SHOP DRAWINGS DESCRIBING THE AWNING/SIGNAGE DESIGN INCLUDING FINISHES, COLORS AND DESIGN DIMENSIONS TO THE OWNER FOR DESIGN INTENT REVIEW ONLY PRIOR TO AWNING/SIGN FABRICATION.
16. SPRINKLER WORK WHERE NEW OR WHERE MODIFICATIONS TO EXISTING SYSTEMS ARE REQUIRED BY CODE OR CONSTRUCTION CONDITIONS SHALL BE SUBMITTED UNDER SEPARATE PERMIT BY A LICENSED SPRINKLER CONTRACTOR. TIE SPRINKLER AND FIRE ALARM INTO BASE BUILDING FIRE PROTECTION SYSTEM.
17. G.C. TO INSURE THAT PROPER ENVIRONMENTAL CONDITIONS ARE MET FOR THE INSTALLATION OF ALL INTERIOR FINISHES.
18. REFER TO FIXTURE MANUAL FOR INFORMATION ON ALL FIXTURES.
19. NO ELEMENTS ARE TO BE ATTACHED TO OR SUPPORTED FROM THE ROOF DECK OR BOTTOM CHORD OF ROOF JOISTS.
20. G.C. SHALL NOT USED GAS POWERED CONSTRUCTION EQUIPMENT.
21. VERIFY ALL EXISTING CONDITIONS PRIOR TO ANY CONSTRUCTION OR FABRICATION. IF DIFFERENT THAN SHOWN, NOTIFY ENGINEER/ARCHITECT IMMEDIATELY FOR MODIFICATION OF DRAWINGS.
22. ALL CONTRACTORS ARE REQUIRED TO COORDINATE THEIR WORK WITH ALL DISCIPLINES TO AVOID CONFLICTS. ALL STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING ASPECTS ARE NOT IN THE SCOPE OF THESE DRAWINGS. THEREFORE, ALL REQUIRED MATERIALS AND WORK MAY NOT BE INDICATED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THESE DRAWINGS WITH ALL OTHER CONSTRUCTION DOCUMENTS. LOCATIONS, SIZES AND NUMBERS OF ALL OPENINGS MAY NOT BE COMPLETELY INDICATED IN THE ARCHITECTURAL DRAWINGS. THE RESPECTIVE CONTRACTOR SHALL VERIFY THEIR WORK WITH ALL OTHER DISCIPLINES.
23. THE CONTRACT DOCUMENTS DO NOT INDICATE THE METHOD OF CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY TO PROTECT THE STRUCTURE DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT LIMITED TO, BRACING, SHORING, UNDERPINNING, ETC. ARCHITECT IS NOT RESPONSIBLE FOR THE CONTRACTOR'S MEANS, METHODS, TECHNIQUES, SEQUENCES OR SAFETY PROCEDURES DURING CONSTRUCTION.

## - GENERAL NOTES
SCALE NONE

| SYMBOL | DESCRIPTION | SYMBOL | DESCRIPTION | SYMBOL | DESCRIPTION |
|---|---|---|---|---|---|
| # AX.X | SECTION TAG- SEE DWG. AS NOTED | # AX.X | ELEVATION TAG- SEE DWG. AS NOTED | # | WALL TYPE TAG- SEE WALL TYPE LEGEND |
| # AX.X | DETAIL TAG- SEE DWG. AS NOTED | # | FINISH TAG- SEE FINISH LEGEND | XXX SQ. FT. ROOM-NAME2 ROOM-NAME XXX | ROOM NUMBER TAG |
| NAME ELEV: X'-X" | ELEVATION BENCHMARK | # | DOOR TAG- SEE HARDWARE SCHEDULE | # | REVISION TAG |
| # | KEY NOTE / RESTROOM ACCESSORIES TAG | | | | |

## - SYMBOL LEGEND
SCALE NONE

## APPLICABLE CODES

| | |
|---|---|
| BUILDING: | 2015 INTERNATIONAL BUILDING CODE |
| MECHANICAL: | 2015 INTERNATIONAL MECHANICAL CODE |
| PLUMBING: | 2015 INTERNATIONAL PLUMBING CODE |
| ELECTRICAL: | 2005 NATIONAL ELECTRICAL CODE |
| LIFE SAFETY: | 2015 INTERNATIONAL FIRE CODE |
| ACCESSIBILITY: | 2009 ICC/ANSI A117.1 |
| ENERGY CONSERVATION: | 2015 INTERNATIONAL ENERGY CONSERVATION CODE |

| | |
|---|---|
| OCCUPANCY LOAD CALCULATIONS | |
| GROSS AREA: | 10,019 S.F. |
| MERCANTILE AREA: | 8,118 SQ.FT./60 SQ.FT. PER PERSON = 136 |
| BUSINESS AREA: | 1,180 SQ.FT./100 SQ.FT. PER PERSON = 12 |
| STAGING AREA: | 721 SQ.FT./300 SQ.FT. PER PERSON = 3 |
| TOTAL OCCUPANCY: | 151 PERSONS |

## BUILDING REQUIREMENTS

| DESCRIPTION | CODE SECTION | REQUIREMENTS | |
|---|---|---|---|
| USE GROUP: | IBC CHAPTER 3, SECTION 309 | M (MERCANTILE) | |
| NUMBER OF STORIES: | | 1 | |
| CONSTRUCTION TYPE: | IBC TABLE 601 | TYPE II-B (EXIST. NO CHANGE) | |
| FIRE SPRINKLERS: | IBC SECTIONS 507.4 | FULLY SPRINKLERED | |
| SEISMIC CATEGORY: | | B | |
| TENANT AREA: | IBC SECTION 507.4 | 10,019 S.F. AREA OF WORK | |
| OCCUPANT LOAD: | | 151 PERSONS | |
| NUMBER OF EXITS: | IBC TABLE 1006.3.1 | 2 REQUIRED<br>2 PROVIDED | |
| EXIT WIDTH: | IBC TABLE 1005.3.2 | 22.65" REQUIRED<br>108" PROVIDED | |
| MAX. TRAVEL DIST.: | IBC TABLE 1017.2 | 250-FT. MAX. | |
| REQUIRED PLUMBING FIXTURES | | | |
| | | MALE | FEMALE |
| LAVATORIES: | IBC TABLE 2902.1 | 1 REQUIRED<br>1 PROVIDED | 1 REQUIRED<br>1 PROVIDED |
| TOILETS: | IBC TABLE 2902.1 | 1 REQUIRED<br>1 PROVIDED | 1 REQUIRED<br>1 PROVIDED |
| DRINKING FOUNTAIN: | IBC TABLE 2902.1 | 1 REQUIRED<br>1 PROVIDED (HI-LO) | |
| SERVICE SINK: | IBC TABLE 2902.1 | 1 REQUIRED<br>1 PROVIDED | |

## - CODE AND BUILDING SUMMARY
SCALE NONE

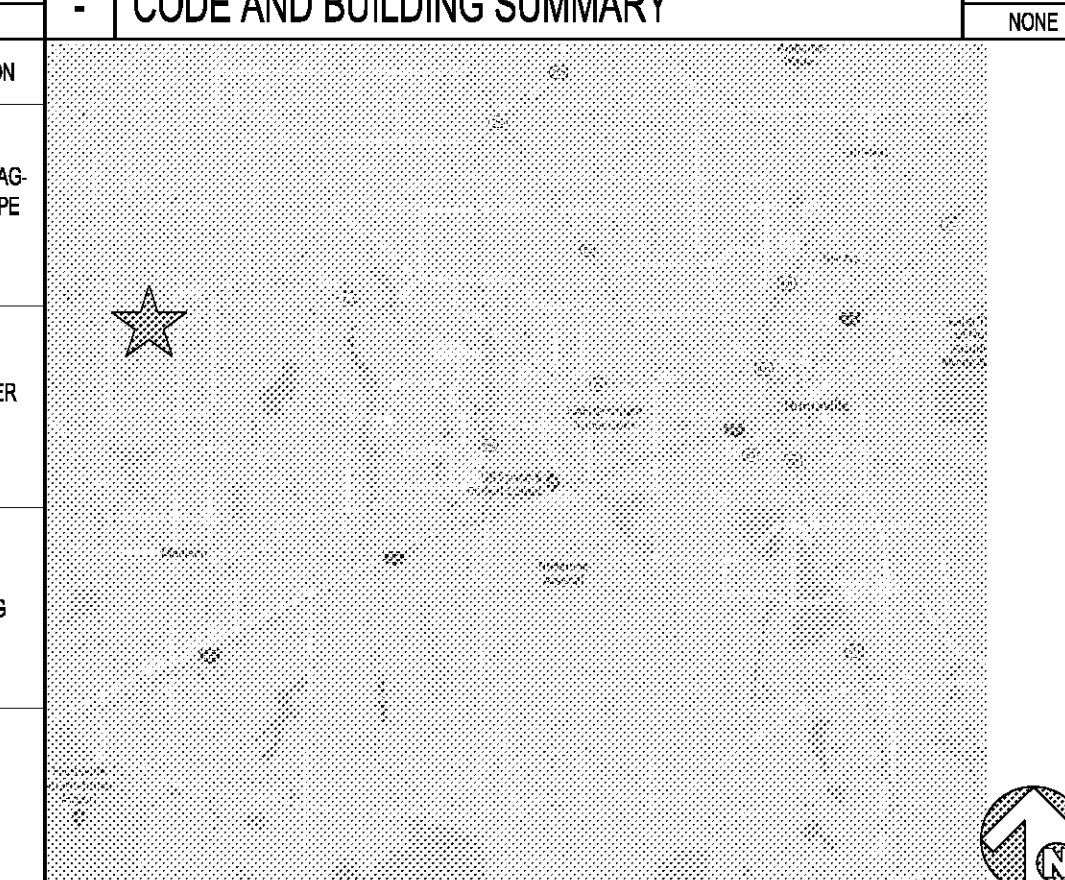

## - AREA MAP
SCALE NONE

G.C. TO RECEIVE, UNLOAD AND INSTALL OWNER SUPPLIED GLASS AND ARRAY SHELVES AND BRACKETS (COORDINATE WITH OWNER). G.C. TO DISPOSE OF PACKAGING MATERIALS. SEE DESCRIPTION OF SHELF QUANTITIES ON SHEET A-1.1

## BID ALTERNATES

| ITEM | REMARKS |
|---|---|
| ELECTRICAL FLOOR OUTLETS | G.C. TO PROVIDE COST TO ADD (1) ADDITIONAL FLOOR OUTLET, PRIOR TO FINISH FLOOR. COST TO INCLUDE UP TO 10 LINEAL FEET OF ELECTRICAL TRENCHING. |
| ELECTRICAL FLOOR OUTLETS | G.C. TO PROVIDE COST TO ADD (2-5) ADDITIONAL FLOOR OUTLETS, PRIOR TO FINISH FLOOR. COST TO INCLUDE UP TO 10 LINEAL FEET OF ELECTRICAL TRENCHING. |
| MOISTURE RESISTANT BARRIER | G.C. TO PROVIDE COST FOR A CEMENT BASED PRODUCT ONLY TO COVER THE ENTIRE SALES FLOOR. SUPPLY AND INSTALL AN MRB AND A TOP COAT OF CEMENTITIOUS BASED PRODUCT PER MANUFACTURER'S INSTRUCTIONS, SMOOTH, FLAT AND READY TO ACCEPT FLOOR FINISHES. |

## DRAWING INDEX

| REVISION 06/03/19 | SHEET # | SHEET NAME |
|---|---|---|
| ● | CS1.0 | COVER SHEET |
| ● | CS2.0 | RESPONSIBILITY SCHEDULE |
| ● | CS3.0 | VENDOR CONTACTS & SUBMITTALS |
| ● | HC1.1 | ACCESSIBILITY DETAILS |
| ● | D-1 | DEMOLITION PLAN |
| ● | A1.0 | EGRESS PLAN |
| ● | A1.1 | FIXTURE PLAN AND SPECIFICATIONS |
| ● | A2.0 | DIMENSION PLAN AND DETAILS |
| ● | A2.1 | ENLARGED SALON PLAN |
| ● | A2.2 | ENLARGED SALES PLAN |
| ● | A2.3 | WALL TYPES, STUD FRAMING & BLOCKING DETAILS |
| ● | A2.4 | DOOR & HARDWARE SCHEDULES |
| ● | A3.1 | REFLECTED CEILING PLAN AND DETAILS |
| ● | A3.2 | ARCH AND VALANCE LIGHTING PLAN AND DETAILS |
| ● | A3.3 | DETAILS |
| ● | A4.1 | FLOOR FINISH PLAN, SCHEDULE & SPECIFICATIONS |
| ● | A6.1 | INTERIOR ELEVATIONS |
| ● | A6.2 | INTERIOR ELEVATIONS |
| ● | A6.3 | INTERIOR ELEVATIONS & ENLARGED TOILET ROOM PLAN |
| ● | A6.4 | INTERIOR ELEVATIONS |
| ● | A7.1 | EXTERIOR ELEVATION |
| ● | A8.1 | CONSTRUCTION DETAILS |
| ● | A8.2 | CONSTRUCTION DETAILS |
| ● | A8.3 | CONSTRUCTION DETAILS |
| ● | F1.1A | WALL FIXTURE DETAILS |
| ● | F1.1B | WALL FIXTURE DETAILS |
| ● | F1.1C | FIXTURE ELEVATIONS |
| ● | SP1 | SPECIFICATIONS |
| ● | SP2 | SPECIFICATIONS |
| ● | SP3 | SPECIFICATIONS |
| ● | SP4 | SPECIFICATIONS |
| ● | SP5 | SPECIFICATIONS |
| ● | SP6 | VINYL FLOOR TILE SPECIFICATIONS |
| ● | MD-1 | MECHANICAL & PLUMBING DEMOLITION PLAN |
| ● | M-1 | MECHANICAL REFLECTED CEILING PLAN |
| ● | M-2 | ENLARGED REFLECTED CEILING PLAN |
| ● | M-3 | MECHANICAL SCHEDULES AND DETAILS |
| ● | M-4 | MECHANICAL SPECIFICATIONS |
| ● | M-5 | MECHANICAL SPECIFICATIONS |
| ● | PD-1 | PLUMBING PLANS AND NOTES |
| ● | P-1 | PLUMBING PLANS AND NOTES |
| ● | P-2 | SANITARY ISOMETRIC |
| ● | P-3 | WATER ISOMETRIC |
| ● | P-4 | PLUMBING SCHEDULES & SPECIFICATIONS |
| ● | P-5 | PLUMBING DETAILS |
| ● | P-6 | PLUMBING SPECIFICATIONS |
| ● | ED-1 | FLOOR PLAN - ELECTRICAL DEMOLITION |
| ● | E0-1 | ONE LINE DIAGRAM & LIGHTING SCHEDULE |
| ● | E0-2 | PANEL SCHEDULES |
| ● | E0-3 | ROOF PLAN & ARCH LIGHTING ELEVATIONS |
| ● | E1-1 | FLOOR PLAN - LIGHTING |
| ● | E2-1 | FLOOR PLAN - ELECTRICAL DIMENSIONS |
| ● | E2-2 | FLOOR PLAN - POWER |
| ● | E3-1 | FLOOR PLAN - LOW VOLTAGE WIRING |
| ● | E3-2 | FLOOR PLAN - VOICE/DATA AND SECURITY |
| ● | E4-1 | ELECTRICAL SPECIFICATIONS |
| ● | S1 | FRAMING PLAN AND DETAILS |

## - DRAWING INDEX
SCALE NONE


RGLA
rgla solutions, inc.
5100 River Road, Ste 125
Schiller Park, IL 60176
p: 847.671.7452
f: 847.671.4200
www.rgla.com


| REVISIONS: | DATE: |
|---|---|
| LL & ULTA REVIEW | 06/03/2019 |
| BID ISSUE | 06/03/2019 |
| PERMIT ISSUE | 06/04/2019 |


robert g. lyon + associates, inc.
retail architecture
5100 River Road, Ste 125
Schiller Park, IL 60176
p: 847.671.7452
f: 847.671.4200
www.rgla.com


SEAL:


THE ABOVE DRAWINGS AND SPECIFICATIONS AND IDEAS, DESIGNS AND ARRANGEMENTS REPRESENTED THEREBY ARE AND SHALL REMAIN THE PROPERTY OF THIS OFFICE AND NO PART THEREOF SHALL BE COPIED, DISCLOSED TO OTHERS OR USED IN THE CONNECTION WITH ANY WORK OR PROJECT OTHER THAN THE SPECIFIC PROJECT FOR WHICH THEY HAVE BEEN PREPARED AND DEVELOPED WITHOUT THE WRITTEN CONSENT OF THIS OFFICE. VISUAL CONTACT WITH THESE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.

WRITTEN DIMENSIONS ON THESE DRAWINGS SHALL HAVE PRECEDENCE OVER SCALED DIMENSIONS: CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS. SHOP DETAILS MUST BE SUBMITTED TO THIS OFFICE FOR APPROVAL BEFORE PROCEEDING WITH FABRICATION.

©2018 RGLA SOLUTIONS, INC.
©2018 ROBERT G. LYON & ASSOCIATES, INC.


ULTA® BEAUTY

ULTA #1613
SHOPPES OF MADISON
8201 HIGHWAY 72 WEST
SUITE C
MADISON, AL 35758

COVER SHEET

DRAWN BY: IA
CHECKED BY: PK
JOB NUMBER: 19047
SHEET NAME: CS1.0


Order Plans@www.LDIILine.com