



30 x 42

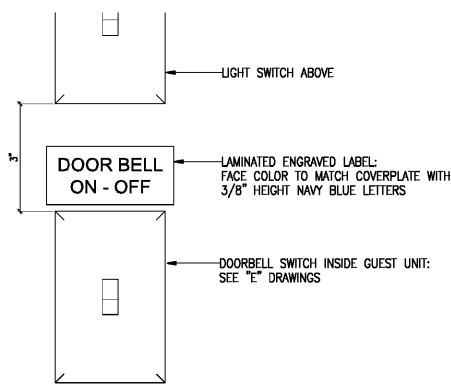

01 | DOORBELL SIGN



02 | BASE MOLDING

Order Plans @ WWW.LDILine.com

COUNTERTOP NOTES

- NO GRANITE ALLOWED.
- PROVIDE 4" HIGH BACKSPASHES AND SIDESPLASHES WHERE COUNTERTOP ABUTS A WALL UNLESS NOTED OTHERWISE. PROVIDE 3" HIGH SPLASHES AT VANITIES.
- PROVIDE 2" DIAMETER DRILLED HOLES AND PLASTIC GRONMETS FOR ELECTRIC PLUGS WHERE REQUIRED FOR EQUIPMENT.

CABINETWORK NOTES

- WOOD SPECIES IS CLEAR MAPLE, STAIN GRADE.
- CABINET GRADE IS AWI CUSTOM. SEE SPECIFICATIONS.
- VENEERED PANEL WOOD GRAIN SHALL RUN VERTICALLY UNLESS NOTED OTHERWISE, PLAIN SLICED, SLIP MATCH, RUNNING MATCH.
- STAIN AND SEAL (OR PAINT AS INDICATED) ALL WOOD, INSIDE AND OUTSIDE CABINETS. SEE PAINTING SPECIFICATION.
- FINISH CABINETWORK SUPPORT APRONS, FILLERS, EDGE STRIPS, SCRIBE TRIM, AND EXPOSED ENDS OF CABINETS TO MATCH CABINET FRONTS.
- CABINETWORK HARDWARE AS FOLLOWS:
 - 4" WIRE PULLS, SATIN CHROME FINISH.
 - DECORATIVE PULLS SELECTED BY INTERIOR DESIGNER.
 - HEAVY DUTY COMMERCIAL GRADE BALL BEARING DRAWER GUIDES.
 - HEAVY DUTY CONCEALED FULLY ADJUSTABLE HINGES.
- COORDINATE TELEPHONE, COMPUTER, AND ELECTRICAL OUTLETS MOUNTED INSIDE CABINETWORK.
- COORDINATE WATER SUPPLY AND FLOOR SINKS MOUNTED INSIDE OR UNDER CABINETWORK.
- COORDINATE EXACT CABINETWORK LAYOUT AND DIMENSIONS WITH OWNER FURNISHED EQUIPMENT.
- COORDINATE SEPARATE KEYING OF CABINETWORK LOCKS WITH OWNER.
- PLASTIC LAMINATE SHALL BE HIGH PRESSURE (HP). MELAMINE SHALL ONLY BE USED WHERE NOTED.
- STONE (QUARTZ OR GRANITE) COUNTERTOPS AND SPLASHES SHALL BE 3/4" THICK.

WOODWORK NOTES

- FOR WOOD SPECIES, SEE CABINETWORK NOTES.
- FOR VENEERED FACE PANELS, SEE CABINETWORK NOTES.
- STAIN AND SEAL ALL WOOD. SEE PAINTING SPECIFICATION.
- WOOD TRIM IS NOT FIRE-RETARDANT TREATED.
- WOOD BLOCKING INSIDE WALL CAVITIES IS NOT FIRE-RETARDANT TREATED.
- PLASTIC LAMINATE SHALL BE HIGH PRESSURE (HP). MELAMINE SHALL ONLY BE USED WHERE NOTED.


SIGNAGE NOTES

- ALL INTERIOR ROOM IDENTIFICATION AND DIRECTIONAL SIGNAGE SHALL COMPLY WITH ADA REQUIREMENTS.
- FOR MOUNTING OF ROOM IDENTIFICATION SIGNS, SEE A701/03.
- FOR OWNER FURNISHED SIGNS, SEE SHEET G102.
- FOR ILLUMINATED EXIT SIGNS, SEE "E" DRAWINGS.
- THE FOLLOWING SIGNS ARE REQUIRED BY CODE:
 - APPROVED FIRE RATED WALL STENCILING IN ACCESSIBLE CONCEALED SPACES.
 - APPROVED FIRE AND SMOKE DAMPER LABEL ON ACCESS POINTS.
 - APPROVED FIRE EXTINGUISHER SIGNS ON WALL ABOVE F.E., AND ON F.E.C. DOOR.
 - APPROVED EXIT, FLOOR NUMBER AND ROOF ACCESS SIGNAGE IS REQUIRED AT STAIRWELLS.
 - APPROVED EMERGENCY EXIT SIGNAGE IS REQUIRED AT ELEVATOR CALL STATIONS.
 - APPROVED OCCUPANT LOAD SIGNAGE IS REQUIRED AT ASSEMBLY SPACES.
 - APPROVED EMERGENCY EVACUATION/PROCEDURE SIGNAGE IS REQUIRED IN GUEST UNITS.
 - APPROVED SAFETY SIGNAGE IS REQUIRED AT SWIMMING POOL.
 - APPROVED IDENTIFICATION SIGNAGE IS REQUIRED AT ACCESSIBLE PARKING AND PASSENGER LOADING ZONES.
- LAMINATED ENGRAVED LABELS ARE REQUIRED FOR THE FOLLOWING LOCATIONS:
 - WALL MOUNTED FIRE EXTINGUISHERS (WHERE NOT INSIDE CABINETS).
 - ELECTRICAL PANELS.
 - HVAC EQUIPMENT.
 - FIRE AND SMOKE DAMPER ACCESS PANELS.
 - DOORBELL ON/OFF SWITCH.

HAMPTON INN
NEW HOTEL
ASHLAND CITY, TENNESSEE
WWW.DAVIDRCARTER.NET
DAVID R. CARTER AND ASSOCIATES



ISSUE DATE 05-30-19
REVISION LOG



PROJECT 00755

CABINETWORK, MILLWORK AND SIGNAGE A902