


TYPE 1 ARROW - BICYCLE LANE

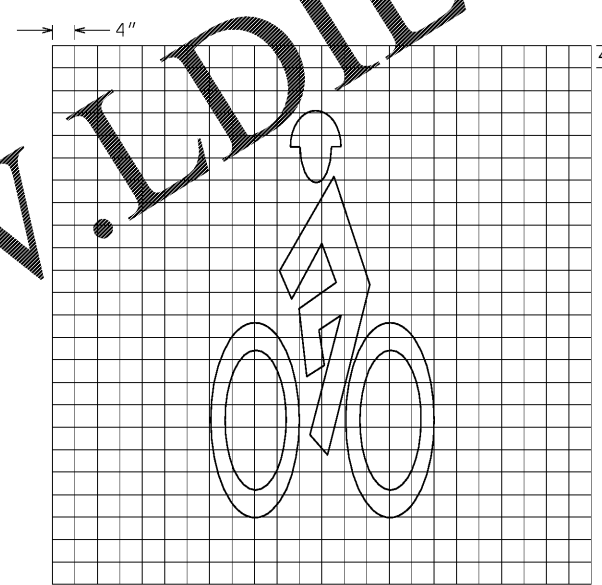

TYPE 4 SYMBOL - BICYCLE LANE

GENERAL NOTES:

- BICYCLE LANE SYMBOLS SHALL BE PLACED ON THE FAR SIDE OF EACH INTERSECTION 6 FEET BEYOND THE CROSS WALK OR END OF INTERSECTING ROAD RADIUS. ADDITIONAL SYMBOLS MAY BE PLACED ON LONG, UNINTERRUPTED SECTIONS OF ROADWAY BASED ON ENGINEERING JUDGEMENT.
- ALL BICYCLE LANE PAVEMENT SYMBOLS SHALL BE HOT APPLIED PREFORMED PLASTIC (THERMOPLASTIC) - 650 FOR BOTH ASPHALT AND CONCRETE PAVEMENTS.
- BICYCLE LANE EDGE LINE SHALL MATCH THE PAVEMENT MARKING TYPE SPECIFIED BY THE PAVEMENT MARKING SELECTION CHART IN SECTION 12 OF THE SIGNING AND MARKING DESIGN GUIDELINES.
- FOR ADDITIONAL INFORMATION REFER TO MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND AASHTO GUIDE FOR THE DEVELOPMENT OF BICYCLE FACILITIES, CURRENT EDITION.

HAC BY	DESIGNED _____	NO SCALE	JANUARY 2000
	DRAWN _____		
	TRACED _____		
	CHECKED _____		
DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA CONSTRUCTION DETAILS DETAILS OF BICYCLE LANE PAVEMENT MARKINGS			NUMBER T-16