PLUMBING FIXTURE SCHEDULE							
MARK	DESCRIPTION	CW	HW	S/W	MAXIMUM FLOW RATE	RIM HEIGHT	NOTES
P-1	WATER CLOSET - FLOOR MOUNTED - MANUAL FLUSH VALVE	1"	-	4"	1.28 GPF	15" TOP OF RIM	
P-1H	WATER CLOSET, ADA - FL MNTD	1"	-	4"	1.28 GPF	17" AFF	
P-2	URINAL	3/4"	-	2"	0.125 GPF	18" AFF	ROUGH IN WATER IN CHASE AND CAP BEHIND WALL
P-2H	URINAL WALL HUNG - MANUAL FLUSH VALVE - ADA	3/4"	-	2"	0.125 GPF	17" TOP OF RIM	ROUGH IN WATER IN CHASE AND CAP IN WALL
P-3H	WALL HUNG LAV, ADA	1/2"	1/2"	1-1/4"	0.5 GPM	34" TOP OF RIM TO FLOOR	
P-4HBF	ELECTRIC WATER COOLER, WALL HUNG	1/2"	-	1-1/4"	8.0 GPH	36" TO CENTER OF BUBBLER OF BOTTLE FILLING STATION UNIT	
P-5	MOP RECEPTOR WITH FAUCET	1/2"	1/2"	3"	NOT RATED	FLOOR MOUNTED	
P-13	SHOWER, 36X36, ACRYLIC INSERT - HANDICAPPED	1/2"	1/2"	2"	2.5 GPM		
P-13H	SHOWER, 36X36, ACRYLIC INSERT - HANDICAPPED	1/2"	1/2"	2"	2.5 GPM		

TEMPERING VALVE SCHEDULE				
MARK	ASSOCIATED WITH WATER HEATER	PRESSURE DROP (PSI)	FLOW (GPM)	BASIS OF DESIGN (LEONARD)*
TV-1	DWH-1	20	7.5	270LF

* - EQUAL PRODUCTS : POWERS, LAWLER, BRADLEY

ELECTRIC WATER HEATER SCHEDULE						
MARK	LOCATION	STORAGE CAPACITY	KW INPUT	RECOVERY RATE @ 100°F RISE	BASIS OF DESIGN A.O. SMITH *	DETAIL
DWH-1	JANITOR 004 - ON SHELF	20 GALLON	4.0	16 GPH	DEL-20	5/P31-01

* - EQUAL PRODUCTS BY STATE, BRADFORD WHITE
NOTE: WATER HEATER STORAGE TEMPERATURE SHALL BE SET FOR 140° F.

DOMESTIC HW RECIRCULATING PUMP SCHEDULE						
MARK	ASSOCIATED WATER HEATER	GPM	TDH (FT)	HP	BASIS OF DESIGN (TACO) *	
CP-1	DWH-1	1	7.5	1/40	006-BF5	ES

* - EQUAL PRODUCTS BY BELL&GOSSET AND GRUNDFOS

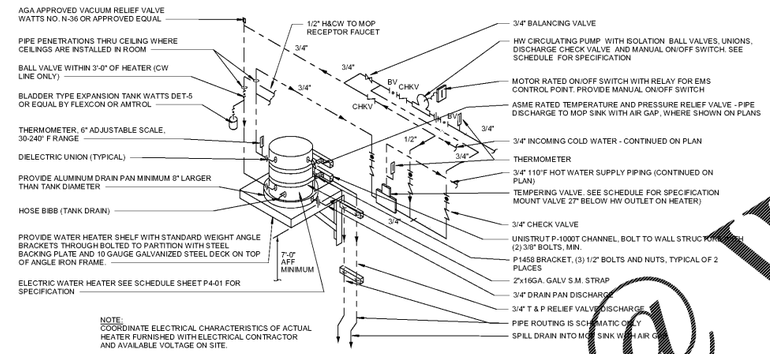

5 ELECTRIC WATER HEATER WALL MNTD W/ PUMP
NO SCALE

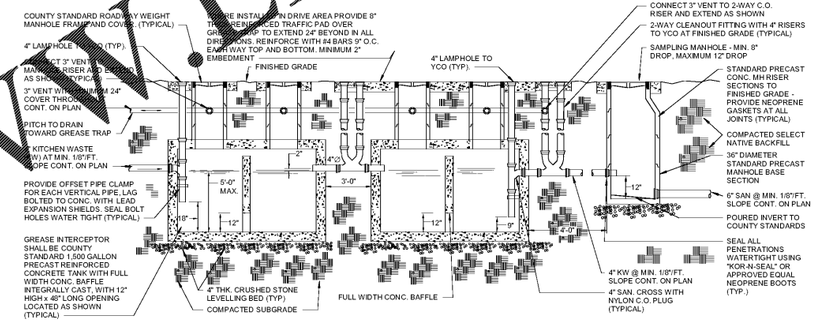

1 SECTION THROUGH GREASE INTERCEPTORS
NO SCALE

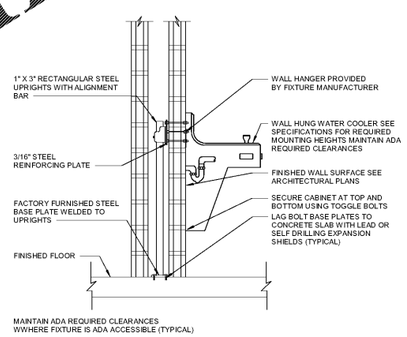

4 WATER COOLER CARRIER INSTALLATION DETAIL
NO SCALE

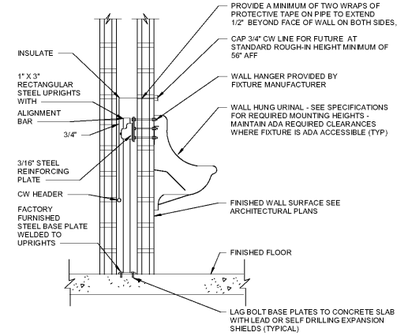

3 URINAL CARRIER INSTALLATION
NO SCALE

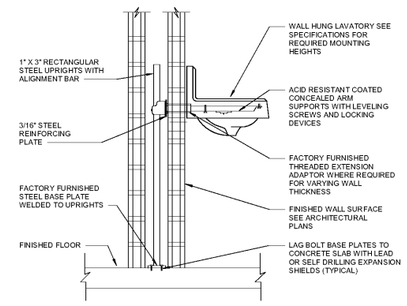

2 LAVATORY CARRIER INSTALLATION DETAIL
NO SCALE

Order Plans @ WWW.LDILine.com

PERKINS + WILL
Address 1
Address 2
Address 3
City, State ZIP
t 987.654.3210
f 012.345.6789
www.perkinswill.com

PROJECT

RELEASED FOR CONSTRUCTION 06/07/2019

KIPP ATLANTA COLLEGIATE - Addition and Renovations
98 Anderson Ave NW
Atlanta GA 30314

KEYPLAN

ISSUE CHART

MARK	ISSUE	DATE

Job Number	
Drawn	BR
Checked	MK
Approved	SM

TITLE

DETAILS

SHEET NUMBER

P31-01

MBA CONSULTING ENGINEERS
MBA# 19002
MATHESON BALL & ASSOCIATES, INC.
11265 ELKINS RD. SUITE F-3
ROSWELL, GEORGIA 30076
PHONE: (770) 751-0775
WWW.MATHESONBALL.COM

Copyright © 2018 Perkins+Will

8/7/2019 3:16:52 PM C:\Users\Billy\Documents\19002_PLUMB_R19_billy@mathesonball.com.rvt