RF21	VCT	ARMSTRONG FLOORING	MIGRATIONS BBT	T3502 PUMICE GRAY	-	12" x 12"	BOH	-	PATRICIA BENTSON...
RF22	VCT	ARMSTRONG FLOORING	RAFFIA	55802 CHARCOAL DUST	-	12" x 24"	BOH	-	PATRICIA BENTSON...
RF23	LVT	PATCRAFT	1336V WOOD PLANX	00540 AGED MAPLE		9"X36"	INFUSION GENERAL FLOORING		SCOTT PRESSMAN...
RF24	LVT	MANNINGTON	SPACIA STONE	LIMESTONE COOL...		18" X 18"	EXAM ROOMS AND INFUSION POD...		
RF25	VCT	ARMSTRONG FLOORING	RAFFIA	5580 SNOWDRIFT		12"X24"	BOH		
096566 RESILIENT ATHLETIC FLOORING									
RF25	LVT	ECORE	STRAIT RX	FOREST RX	-	48"...	PTOT GYM	-	KATIE MCGOWAN...
RF26	LVT	ECORE	ECOSURFACES	2614 MONDAY BLUES	-	48"...	PTOT GYM	-	KATIE MCGOWAN...
096623 TERRAZZO FLOORING									
TZ01	TERRAZZO	MASTER TERRAZZO	MORRICITE EPOXY TERRAZZO	MT-1070-1					BEN NICHOLSON 919.608.4897
TZ02	TERRAZZO	MASTER TERRAZZO	MORRICITE EPOXY TERRAZZO	MT-1010					BEN NICHOLSON 919.608.4897
044000 STONEWORK (BASE TO MATCH...									
TZB01	TERRAZZO BASE	MASTER TERRAZZO	MORRICITE EPOXY TERRAZZO	MT-1070-1					BEN NICHOLSON 919.608.4897
TZB02	TERRAZZO BASE	MASTER TERRAZZO	MORRICITE EPOXY TERRAZZO	MT-1010					BEN NICHOLSON 919.608.4897
096723 RESINOUS FLOORING									
EPF01	EPOXY FLOOR	STONHARD	STONCLAD GS	TBD			BACK OF HOUSE AND EVS GROUND...		
EPF02	EPOXY FLOOR	STONHARD	STONCLAD UR	TBD			LEVEL 5		
EPF03	EPOXY FLOOR	STONHARD	STONGARD MR	TBD			MECHANICAL		
097723 FABRIC WRAPPED PANEL SYSTEM									
FWP01	ANTIMICROBIAL ACOUSTICAL FABRIC	CARNEGIE	XOREL	SPIRE			ADMINISTRATION AREAS		ALISON HONDROULIS...
FWP02	ANTIMICROBIAL ACOUSTICAL FABRIC	CARNEGIE	XOREL	METEOR			ADMINISTRATION AREAS		ALISON HONDROULIS...
FWP03	ANTIMICROBIAL ACOUSTICAL FABRIC	CUSTOM	XOREL-PRINTED GRAPHIC	CUSTOM			TEAM WORKSTATIONS		
099123 INTERIOR PAINTING									
PT01	PAINT	SHERWIN WILLIAMS	SW 7010	WHITE DUCK	-	-	-	-	
PT02	PAINT	SHERWIN WILLIAMS	SW 9058	SECRET COVE	-	-	-	-	
PT03	PAINT	SHERWIN WILLIAMS	SW 6502	LOCH BLUE	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT04	PAINT	SHERWIN WILLIAMS	SW 9029	COOL AVOCADO	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT05	PAINT	SHERWIN WILLIAMS	SW 6780	NAUTILUS	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT06	PAINT	SHERWIN WILLIAMS	SW 6765	SPA	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT07	PAINT	SHERWIN WILLIAMS	SW 7042	SHOJI WHITE	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT08	PAINT	SHERWIN WILLIAMS	SW 2849	WESTCHESTER GRAY	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT09	PAINT	SHERWIN WILLIAMS	SW 7075	WEB GRAY	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT10	PAINT	SHERWIN WILLIAMS	SW 7005	PURE WHITE	EGGSHELL AT WALLS, FLAT AT...	-	-	-	
PT11	PAINT	SHERWIN WILLIAMS	SW7017	DORIAN GRAY	EGGSHELL AT WALLS, FLAT AT...				
PT12	PAINT	SHERWIN WILLIAMS	SW6480	LAGOON	EGGSHELL AT WALLS, FLAT AT...				
PT13	PAINT	SHERWIN WILLIAMS	SW6509	GEORGIAN BAY	EGGSHELL AT WALLS, FLAT AT...				
PT14	PAINT	IDEAPAINT	OVERPULL MAGNETIC...	PRO WHITE	MARKERBOARD		ADMIN WRITEABLE SURFACE		JULIA ROMAN[illegible]7.714.[illegible]76
099300 CLEAR CONCRETE SEALANTS									
SC01	SEALED CONCRETE								
SCG01	URETHANE/ EXPOXY TRAFFIC...								
102123 CUBICLE CURTAINS AND TRACK									
CC01	FABRIC	MAHARAM	TUNE 511464	002 CISTERN	-	72"...	-	-	JASON SHARPE 404.909.8438
CC02	FABRIC	CARNEGIE	FOUNDATION 4360	30		72"...			ALISON HONDROULIS...
CC03	FABRIC	MAHARAM	COVENE 511494	005 WADE		72"...			
102600 WALL AND DOOR PROTECTION									
PWC01	PROTECTIVE WALL COVERING	WOLF GORDON	P3T-60039 TRANQUILITY	SOULFUL GREY	-	48"...	-	-	KAELIN HIPES 770.212.0629
PWC02	PROTECTIVE WALL COVERING	WOLF GORDON	P3T-60002 SAHARA SILK	ZELLIJ	-	48"...	-	-	KAELIN HIPES 770.212.0629
PWC03	PROTECTIVE WALL COVERING	WOLF GORDON	P3T-60003 SAHARA SILK	TAGINE	-	48"...	-	-	KAELIN HIPES 770.212.0629
PWC04	PROTECTIVE WALL COVERING	WOLF GORDON	P3T-60004 SAHARA SILK	MENARA GARDENS	-	48"...	-	-	KAELIN HIPES 770.212.0629
PWC05	PROTECTIVE WALL COVERING	WOLF GORDON	P3T-60005 SAHARA SILK	BLUE CITY	-	48"...	-	-	KAELIN HIPES 770.212.0629
PWC06	PROTECTIVE WALL COVERING	CONSTRUCTION SPECIALTIES...	ACROVYN WALL COVERING	TBD			CLINICAL SPACES		
PWC07	PROTECTIVE WALL COVERING	CONSTRUCTION SPECIALTIES...	ACROVYN WALL COVERING	TBD			CLINICAL SPACES		
PWC08	PROTECTIVE WALL COVERING	CONSTRUCTION SPECIALTIES...	STAINLESS STEEL	STAINLESS STEEL			BOH		
PWC09	PROTECTIVE WALL COVERING	CONSTRUCTION SPECIALTIES...	ACROVYN BY DESIGN WALL...	TBD			IMAGING		
CG01	CORNER GUARD	CONSTRUCTION SPECIALTIES...	ACROVYN VINYL CORNER GUARD	SEASHELL		3"	CLINICAL AND BOH		
CG02	CORNER GUARD	CONSTRUCTION SPECIALTIES...	CLEAR LEXAN CORNER GUARD	WHITE		1 1/2"	PUBLIC WAITING CONCOURSE		
CG03	CORNER GUARD	SCHLUTER		ANODIZED ALUMINUM			LOBBY		
CG04	CORNER GUARD	SCHLUTER		ANODIZED ALUMINUM			PUBLIC WAITING CONCOURSE		
CG05	CORNER GUARD	CONSTRUCTION SPECIALTIES...		MATCH WOOD GRAIN			LOBBY		
CR01	CRASHRAIL/BUMPER RAIL	CONSTRUCTION SPECIALTIES...	SCR/BCR/ECR-48N			6"			
BR01	BUMPER RAIL	CONSTRUCTION SPECIALTIES...	BG-30N			2"			
HR01	HANDRAIL	CONSTRUCTION SPECIALTIES...	PLASTFORM SERIES...						
PWC10	PROTECTIVE WALL COVERING	ALTRO	ALTRO WHITEROCK; SMOOTH FINISH	TBD	BUTT JOINT SEAMS TO BE HEATWELDED; HEATWELD TO CONTINOUS COVE BASE...	8'-4" X 8'-2" SHEET	OPERATING AND PROCEDURE ROOMS		
PWC10	PROTECTIVE WALL COVERING	ALTRO	ALTRO WHITEROCK; SMOOTH FINISH; GRAPHIC IMAGE	CUSTOM GRAPHIC IMAGE	BUTT JOINT SEAMS TO BE HEATWELDED; HEATWELD TO CONTINOUS COVE BASE...	10'-4" X 9'-10" SHEET	OPERATING AND PROCEDURE ROOMS		
122413 ROLLER WINDOW SHADES									
WT01	SHADES	SWF CONTACT	CROSSHATCH S300	C8204 FOG				AUTOMA...	JIM CROTTS 608.698.3385
WT02	SHADES	SWF CONTACT	CROSSHATCH S300	C8204 FOG				MANUAL	
123661 SIMULATED STONE...									
SSM01	QUARTZ	LG VIATERA	VIATERA	MINUET	-	-	RECEPTION	-	LEIGH WALFRED 678.736.0127
SOLID SURFACE MATERIAL									
SSM02	SOLID SURFACE	CORIAN	CORIAN	ANTARCTICA	-	-	-	-	MARTHA SMITH 678.699.0027
SSM03	SOLID SURFACE	WILSONART	SOLID SURFACE 9222SS	TITANIUM GREY	-	-	-	-	DAVID MAY 770.527.2466
SSM04	SOLID SURFACE	CORIAN	CORIAN	DEEP CLOUD					MARTHA SMITH 678.699.0027
SSM05	SOLID SURFACE	CORIAN	CORIAN	CAMEO WHITE					MARTHA SMITH 678.699.0027
SSM06	SOLID SURFACE	CORIAN	CORIAN	MODERN WHITE					MARTHA SMITH 678.699.0027

ELEVATOR CAB PANEL					
ECP01	STAINLESS...	FORMS AND...	STAINLESS STEEL	SILK -...	JENNIFER LOUX 404.323.8265
124813 ENTRANCE FLOO...					
EM01	CARPET	TARKETT	ASSERTIVE...	STEELWORK...	
WS01	WOOD	MATERIALS INC	TABU	MI-H1253	
STATIC DISSIPATIVE...					
SDRF01	ARMSTRONG				

2019-07-03 4:37:38 PM

GENERAL FINISH SCHEDULE NOTES

A. GENERAL NOTES:

1. CONTRACTOR IS RESPONSIBLE FOR STORING ALL MATERIALS PRIOR TO INSTALLATION; AS WELL AS REMAINING ATTIC STOCK PER MANUFACTURERS' INSTRUCTION. CONTRACTOR WILL BE RESPONSIBLE FOR ANY DAMAGE INCURRED DUE TO IMPROPER STORAGE, AND REPLACE AT NO COST TO OWNER.

2. REFER TO THE PROJECT SPECIFICATIONS FOR DESCRIPTION OF MATERIAL QUALITY AND INSTALLATION METHODS. ALL FINISHES SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS' SPECIFICATIONS AND RECOMMENDATIONS.

3. ALL SURFACES WHICH ARE TO RECEIVE FINISHES ARE TO BE CLEAN, SMOOTH, AND PREPARED TO ACCEPT SPECIFIED FINISH. ALL FINISH SUB CONTRACTORS ARE RESPONSIBLE FOR INSPECTION OF WORK SURFACE CONDITION PRIOR TO INSTALLATION. SEE WALL AND FLOOR FINISH PLANS FOR EXTENT OF WORK POINTS

4. ALL INTERIOR FINISHES SHALL MEET OR EXCEED "CLASS A" FIRE RATING

5. CONTRACTOR IS RESPONSIBLE FOR PATCHING AND REPAIRING ANY DAMAGE TO FINISHED SURFACES DURING CONSTRUCTION FOR ALL INTERIOR FINISHES

B. FLOORING:

1. ALL SUB FLOORING MATERIAL TO BE LEVEL AND SMOOTH. CONTRACTOR IS RESPONSIBLE FOR INSPECTION. SUBFLOOR TO BE IN COMPLIANCE WITH FLOORING MANUFACTURERS' MOISTURE PH AND SUB-FLOOR CONDITIONS PRIOR TO INSTALLATION TO MAINTAIN WARRANTY. ADDITIONAL FLOOR PREPARATION MAY BE REQUIRED DUE TO [illegible] FOR EQUIPMENT

2. NO FLOORING PRODUCT SUBSTITUTION WILL BE APPROVED UNDER ANY CIRCUMSTANCE WITHOUT THE KNOWLEDGE, REVIEW AND APPROVAL FROM THE INTERIOR DESIGNER

3. CONTRACTOR TO COORDINATE WITH OWNER FOR USE OF ATTIC STOCK AS HELD BY OWNER. FINAL FLOORING MAY BE SUBJECT TO AVAILABILITY OF STOCK AND SHOULD BE CONFIRMED PRIOR TO THE START OF PROJECT

C. PAINT:

1. TYPICAL ALL WALLS SHALL BE EGGSHELL FINISH, UNLESS NOTED OTHERWISE. ALL WALLS SHALL BE PT01 UNLESS OTHERWISE NOTED

2. TYPICAL ALL DOOR FRAMES AND WINDOW FRAMES TO BE PAINTED PT11 UNLESS OTHERWISE NOTED

3. CONTRACTOR SHALL SUBMIT PAINT SAMPLES FOR APPROVAL TO THE INTERIOR DESIGNER PRIOR TO PURCHASE OF INSTALLATION. SAMPLES TO BE PREPARED IN ACCORDANCE WITH THE SPECIFICATION USING ONE (1) COAT OR PRIMER AND TWO (2) COATS OF PAINT COLOR WITH SPECIFIED SHEEN. MOCKUP SAMPLES TO BE SUBMITTED IN A TIMELY MANNER ALLOWING DESIGNER TO REQUEST ADDITIONAL MOCKUPS AS REQUIRED.

4. ALL ACCENT COLORS ARE TO BE APPLIED WITH MINIMUM OF ONE (1) PRIMER COAT AND TWO (2) COATS OF SPECIFIED PAINT. IF NEEDED APPLY ADDITIONAL COATS FOR FULL OPACITY. FINISHED ACCENT WALLS ARE TO BE THOROUGHLY COVERED WITH ACCENT PAINT FREE FROM STREAKING AND NOTICEABLE DETECTION OF DRYWALL IMPERFECTIONS INCLUDING TAPE AND MUD. PROVIDE HARD STRAIGHT EDGE LINE WHERE THE ACCENT COLOR MEETS ADJACENT WALL COLOR MATERIALS.

D. WALL PROTECTION:

1. SHEET WALL PROTECTION SHALL BE FACTORY CUT

E. MILLWORK:

1. ALL MILLWORK CABINET INTERIOR SURFACES SHALL BE WHITE MELAMINE UNLESS OTHERWISE NOTED. MILLWORK CABINET DOOR BACKS AND EDGES TO BE PLASTIC LAMINATE TO MATCH CABINET FACE. ALL MILLWORK OPEN SHELVES, BROCHURE SLOTS, AND CUBBIES TO HAVE MATCHING PLASTIC LAMINATE ON ALL SIDES AND BACK

2. PLASTIC LAMINATE WOOD GRAIN SHALL RUN VERTICAL, UNLESS OTHERWISE NOTED. ALL WOOD GRAIN LAMINATE SHALL RUN IN THE SAME DIRECTION

3. AS APPLICABLE ALL BASES AT MILLWORK /CASEWORK SHALL BE 4" HIGH APPLY RUBBER COVE BASE AT ALL HARD FLOORING SURFACES UNLESS OTHERWISE NOTED

4. ALL BACKSPLASHES AND COUNTERS AT SINK LOCATIONS TO BE SOLID SURFACE CORIAN UNLESS OTHERWISE NOTED

F. ELEVATOR CAB FINISHES:

1. COORDINATE ALL ELEVATOR CAB FINISHES WITH INTERIOR DESIGNER

2. ELEVATOR CAB WALL FINISHES TO RECEIVE PACKAGE FROM FORMS AND SURFACES AND ELEVATOR CAB FLOORING TO BE RESILIENT LUXURY VINYL TILE

G. BASE:

1. ALL HEAT WELDED INTEGRAL COVE BASES SHALL COVE STICK SUPPORT

WALL PROTECTION SYSTEMS

RIGID SHEET WALL PROTECTION

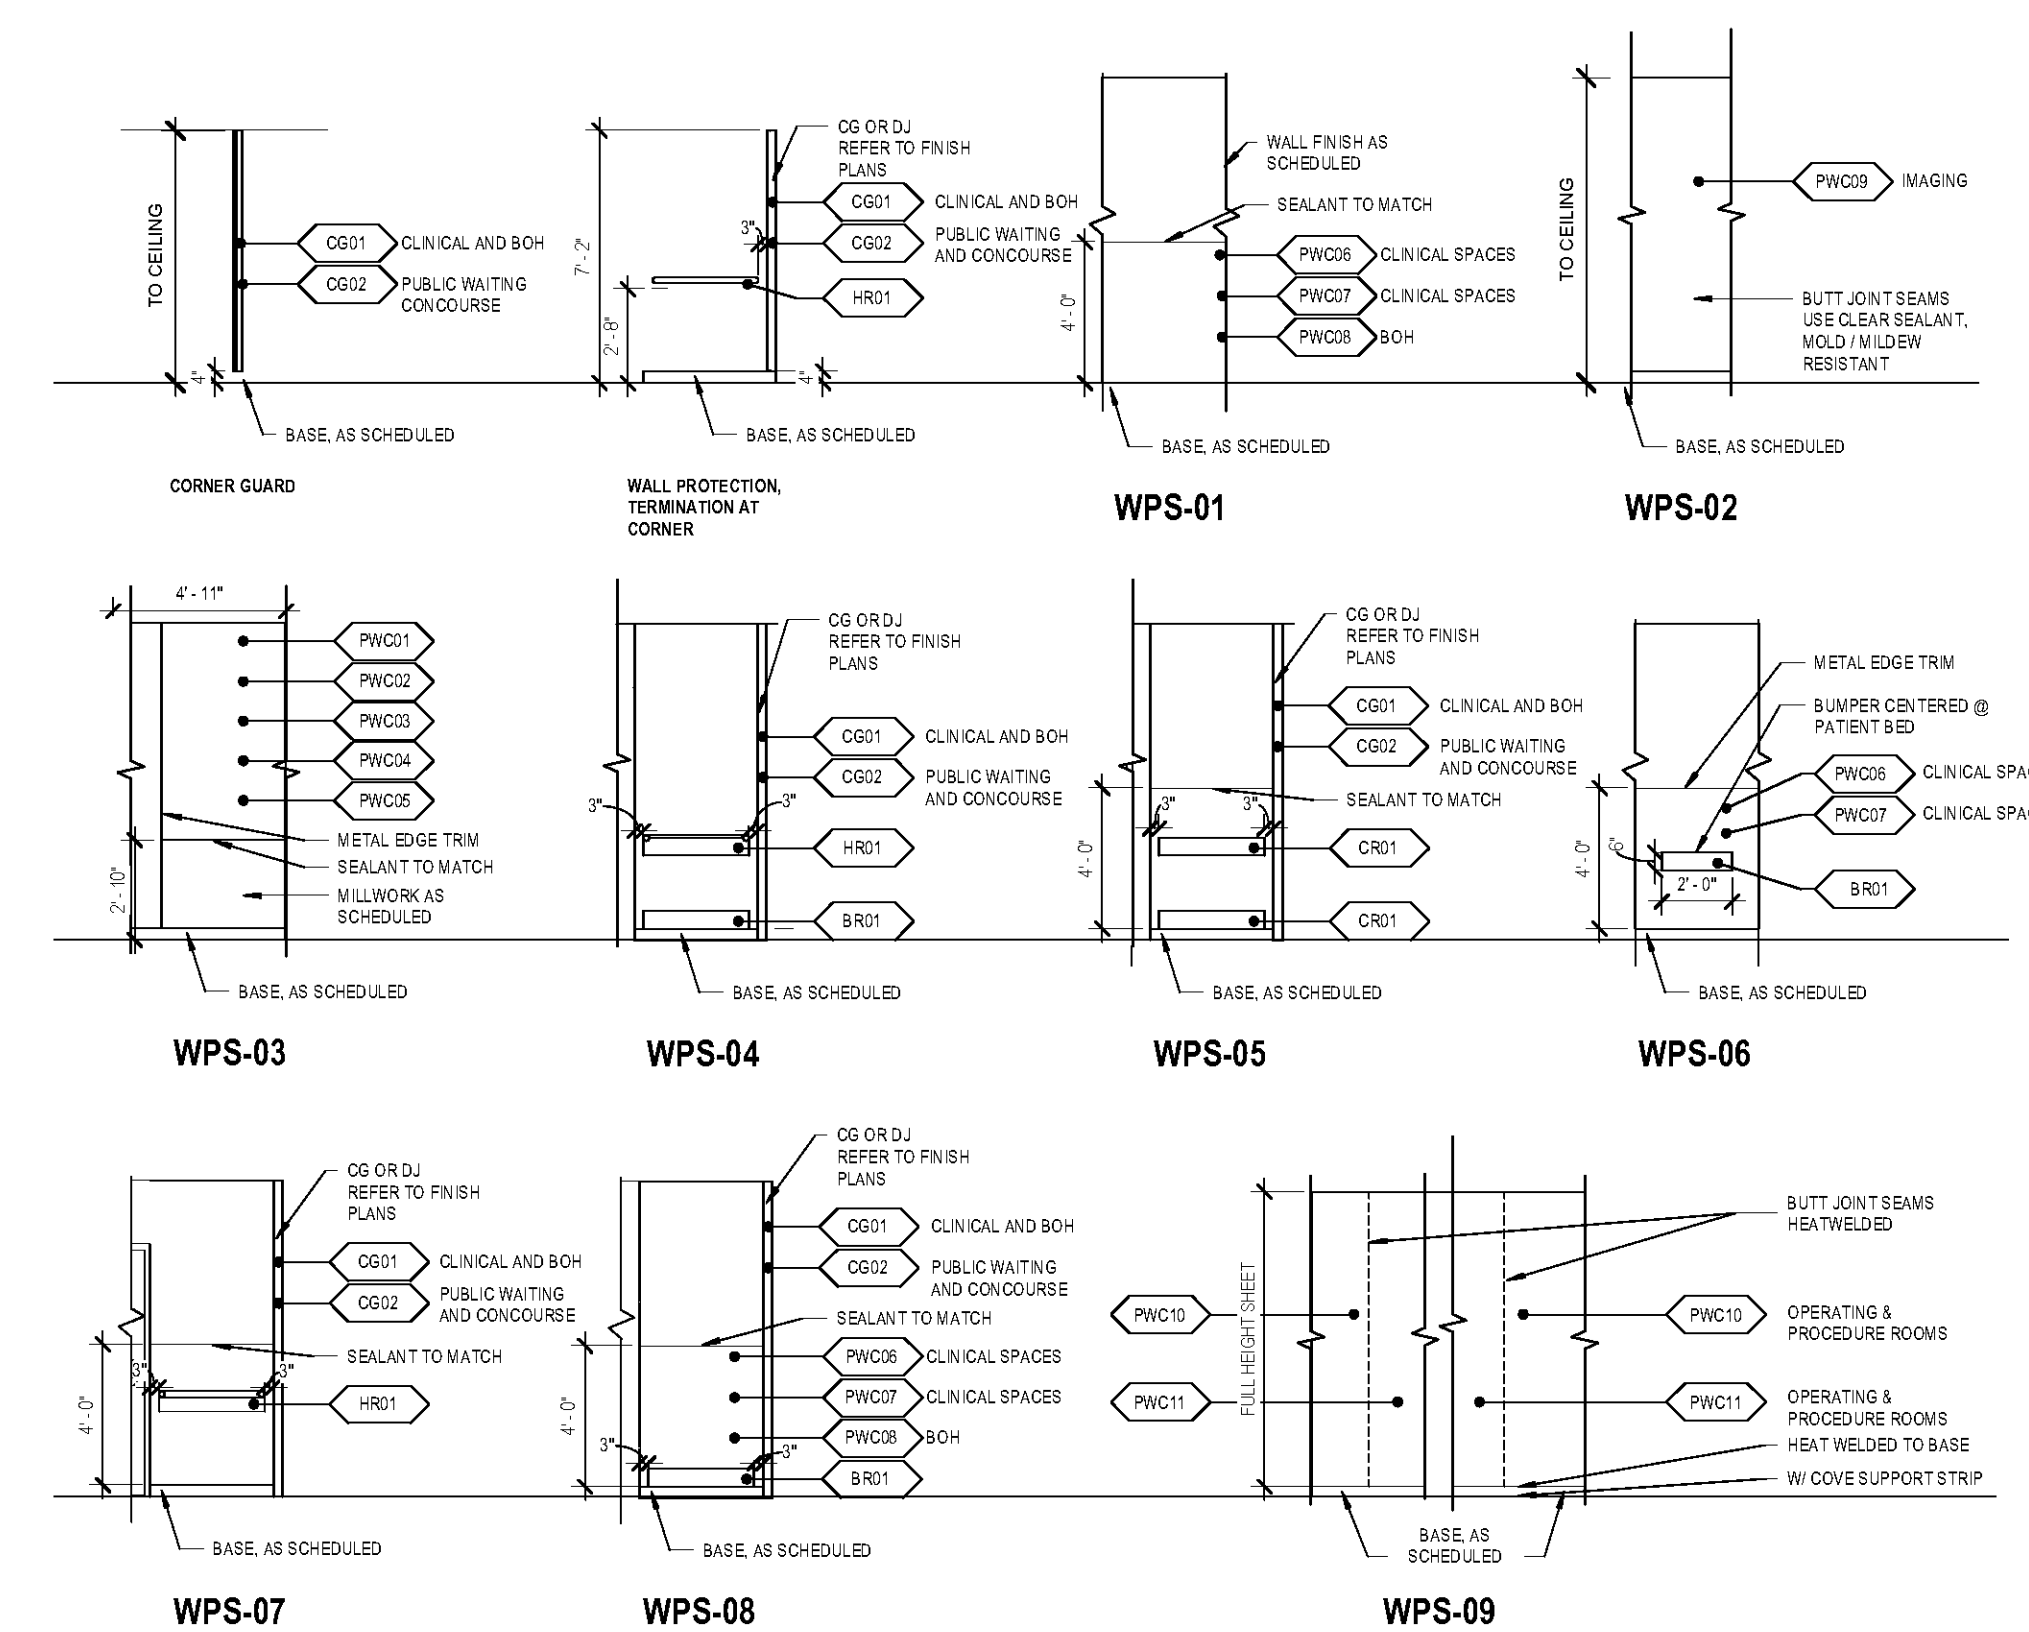

Grady

Project
THE CENTER FOR ADVANCED SURGICAL SERVICES (CASS)
80 GILMER STREET SE
ATLANTA, GA 30303

Prepared For
GRADY HEALTH SYSTEM
80 JESSE HILL DR. SE
ATLANTA, GA 30303

Hellmuth, Obata & Kassabaum, Inc.
133 Peachtree Street, NE, Suite 4800
Atlanta, GA 30303 USA
t +1 404 439 9000 f +1 404 439 9001

All reproduction & intellectual property rights reserved © 2019

In Association with

Key Plan

Professional Seals

NOT FOR CONSTRUCTION

No.	Description	Date
1	DD - GMP	2019-07-03

Project No: 18.16013.00

Sheet Title
INTERIOR FINISH SCHEDULE

Original is 30 x 42. Do not scale contents of this drawing.

Sheet Number
A220.2

Order Plans @ WWW.LDILine.com