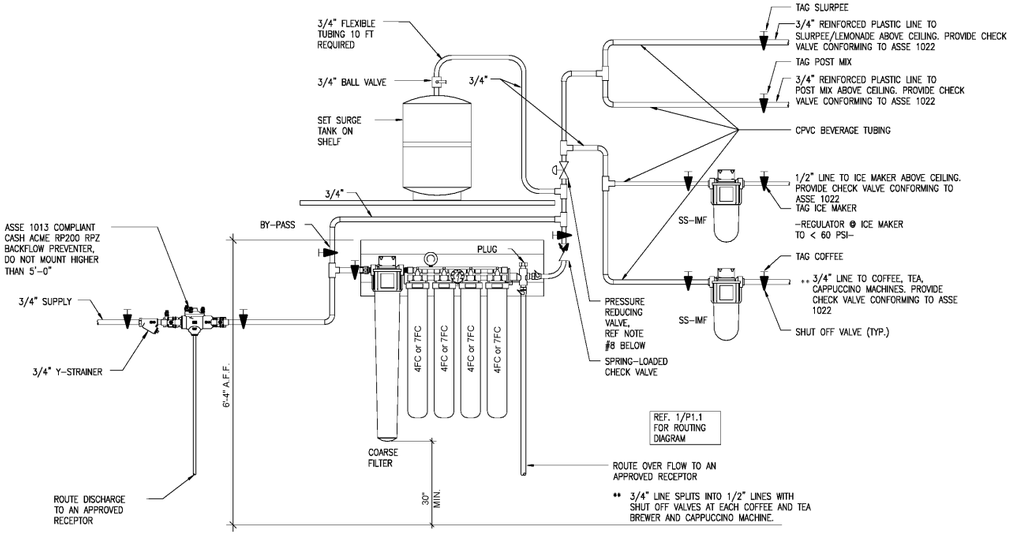

PENTAIR EVERPURE FILTER SYSTEM MODEL

1. WATER SUPPLY MUST BE 3/4" INCH.
2. WATER SHUT-OFF VALVE SHALL BE "BALL LOCK" TYPE. POSITIVE ON-OFF.
3. DRAIN MUST BE PROVIDED TO PERMIT FLUSHING OF NEW FILTERS.
4. WATER FOR ICE MAKERS, COFFEE MAKERS, AND CAPPUCCINO MACHINES SHALL BE ROUTED THROUGH THE SS-IMF UNITS.
5. WATER FOR FSD AND FCB EQUIPMENT SHOULD NOT BE ROUTED THROUGH THE SS-IMF UNITS (WILL REDUCE CARBONATION).
6. 4FC OR 7FC (CARBON) FILTERS MUST BE REPLACED IN SETS AS REQUIRED BASED ON GALLONAGE.
7. COARSE FILTER AND SS-IMF UNITS MAY BE CHANGED INDIVIDUALLY.
8. HONEYWELL PRESSURE REDUCING VALVE MODEL DS05C1030 (SET AT 55 PSI) INSTALLED AFTER TEE TO SURGE TANK AND BEFORE FIRST TEE TO BEVERAGE EQUIPMENT.

1 EVERPURE WATER PURIFICATION SYSTEM
N.T.S.

COFFEE RELATED EQUIPET ON 3/4" FILTER LINE:

1. REQUIREMENTS FOR COFFEE RELATED EQUIPMENT:
2. ¾" FILTERED WATER LINE TO COFFEE RELATED EQUIPMENT IS IN THE FOLLOWING ORDER OF CONNECTION:
3. MELITTA BEAN TO CUP
4. FRANKE BEAN TO CUP
5. CURTIS CAPPUCCINO
6. BUNN NITRO
7. BUNN COFFEE BREWERS
8. LANCER ICED TEA
9. FOR LOCATIONS WITH LOWER STATIC OR DYNAMIC PRESSURES, REQUIREMENT IS THE USE OF THE 4FC FILTER CARTRIDGE OR THE 7FC FILTER CARTRIDGE IN PLACE OF THE XC FILTER CARTRIDGES BASED ON THE GALLONAGE RATE AS STATED BELOW. BOTH FILTERS HAVE EQUAL MICRON RATING WITH MORE GALLONAGE CAPACITIES THAN THE PRESENT XC CARTRIDGES USED IN THE SYSTEM.
10. THE 4FC AND 7FC FILTER CARTRIDGES HAVE A HIGHER RATED FLOW RATE THAN THE PRESENT XC FILTER CARTRIDGES WHICH WOULD ALLOW FOR LESSER FILTER PRESSURE DROPS DURING THE SERVICE CYCLE.
11. 4FC FILTER CARTRIDGE RATING IS 0.5 MICRON, 15,000 GALLONS AT 2.5 GPM.
12. 7FC FILTER CARTRIDGE RATING IS 0.5 MICRON, 25,000 GALLONS AT 2.5 GPM

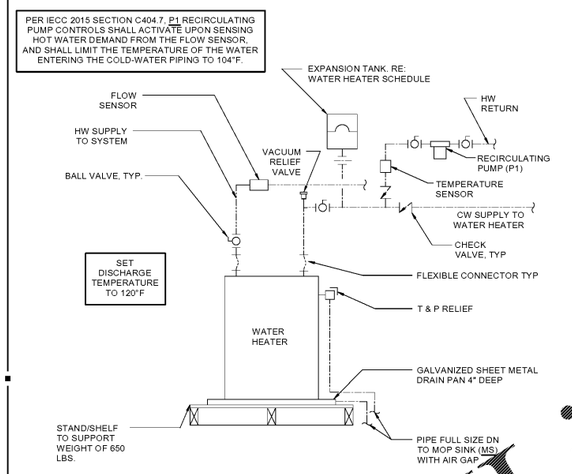

2 WATER HEATER
N.T.S.

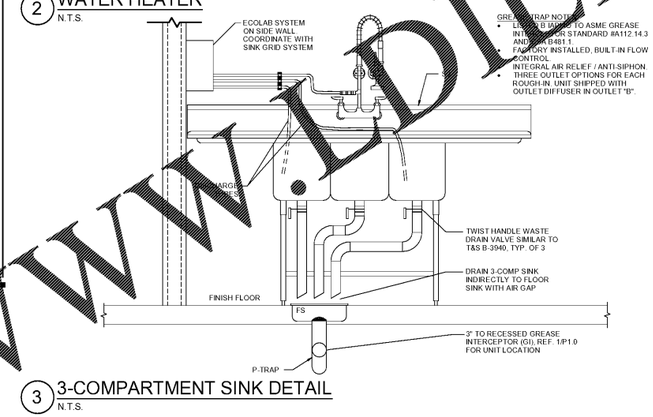

3 3-COMPARTMENT SINK DETAIL
N.T.S.

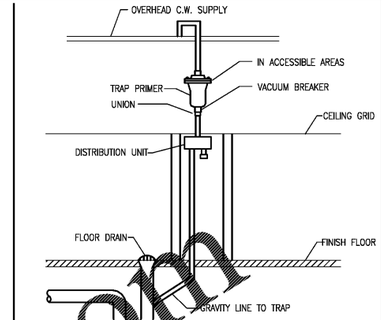

4 TRAP PRIMER DETAIL
N.T.S.

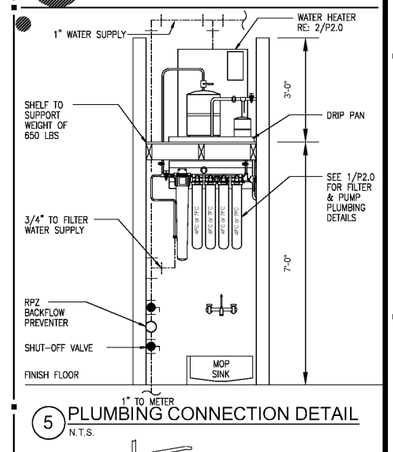

5 PLUMBING CONNECTION DETAIL
N.T.S.

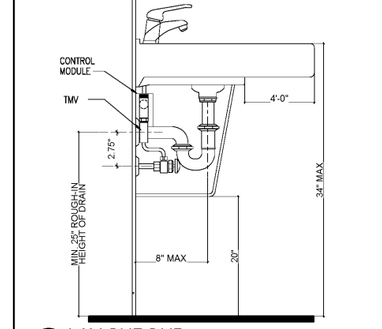

6 LAV SHROUD
N.T.S.



7 PIPE SLEEVE DETAIL
N.T.S.

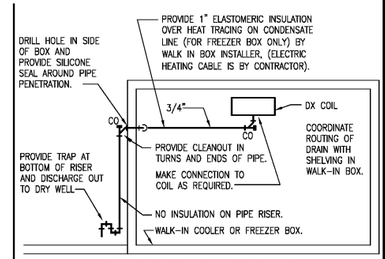

8 CONDENSATE DRAIN DETAIL
N.T.S.

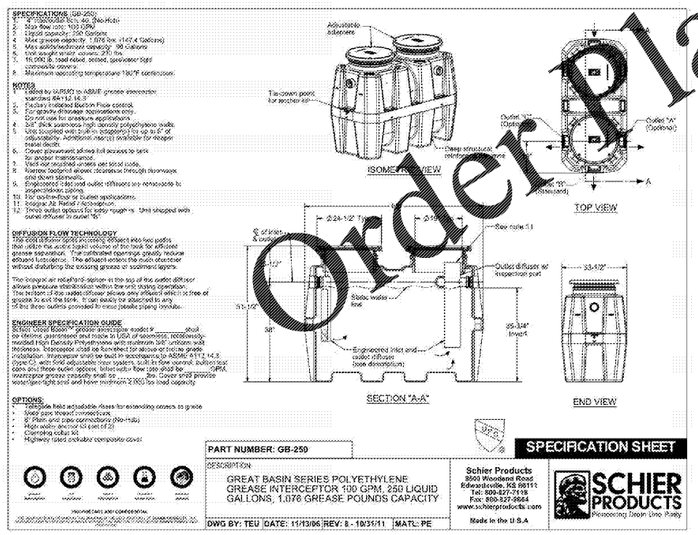

SV24
Sewer Viewer **Wastewater Sampling Port Technical Data**



SUBMITTAL

STANDARD:

OPTIONS:

Tube/Slide Boxes

APPROVAL:

SCHIER LIFETIME GUARANTEED GREASE INTERCEPTORS
MODEL/MODÈLE: SV24
DESCRIPTION: Drop-Sewer Wastewater Sampling Port
page 1 of 2

Order Plans @ www.LDLine.com

INTERPLAN LLC
ARCHITECTURE
ENGINEERING
INTERIOR DESIGN
PROJECT MANAGEMENT

AA 003420
CA 8660

604 COURTLAND STREET
SUITE 100
ORLANDO, FLORIDA 32804
PH 407.645.5008
FX 407.629.9124

SEAL:

THIS DOCUMENT IS NOT FOR REGULATORY APPROVAL, PERMITTING, OR CONSTRUCTION.

NO DATE REMARKS
REVISIONS

BID SET
JUNE 27, 2019

7-ELEVEN STORE #38777

12060 US 301 N
PARRISH, FL
34219

PROJECT NO: 2018.0891
DATE: FEBRUARY 26, 2019

P2.1
PLUMBING DETAILS AND SPECIFICATIONS

CHECKED: MM DRAWN: LE

COPYRIGHT © 2019 INTERPLAN LLC - RESERVES COPYRIGHT & OTHER RIGHTS RESTRICTING THESE DOCUMENTS TO THE ORIGINAL SITE OR PURPOSE FOR WHICH THEY WERE PREPARED. REPRODUCTIONS, CHANGES OR ASSIGNMENTS ARE PROHIBITED.