DOOR/WINDOW SCHEDULE NOTES:

1. ALL DOORS TO BE INSTALLED IN ACCORDANCE WITH SECTION 1008.1 NORTH CAROLINA BUILDING CODE: LOCKING DEVICES SHALL COMPLY WITH SECTION 1008.1.8.3. PANIC DEVICES SHALL COMPLY WITH SECTION 1008.1.9.

2. ALL DOORS TO BE INSTALLED IN ACCORDANCE WITH CHAPTER 11 AND ANSI 117.1-03 OF THE 2018 NCBC BUILDING CODE. DOOR CLOSERS SHALL COMPLY WITH SECTIONS 7.6 AND 7.7. DOOR THRESHOLDS SHALL COMPLY WITH SECTION 7.8. DOOR HARDWARE SHALL COMPLY WITH SECTION 7.9.

3. ALL EXTERIOR GLAZING TO BE POLYCARBONATE GLAZING. REFERENCE WINDOW ELEVATIONS FOR SPECIFIC MATERIAL AND MANUFACTURER NOTES.

4.WHERE KEY NOTED ON A-101A AND A-101B, PROVIDE CONDUIT AT DOORS FOR FUTURE FAIL SAFE CARD READER ACCESS.

5. ALL INTERIOR GLAZING TO BE 1/4 " TEMPERED GLASS. REFERENCE ELEVATIONS FOR SPECIFIC MATERIAL AND MANUFACTURER NOTES.

6. DIRECTIONAL SIGNAGE SHALL BE PROVIDED AT THE INTERIOR TO THE NEAREST ACCESSIBLE EXIT IN ACCORDANCE WITH SECTION 1110.2.

7. SIGNAGE SHALL COMPLY WITH 1022.7, 1022.8, 1110 AND E107 OF NCSBC AND 703 OF A117.1.

8. ALL TEMPERED GLASS TO COMPLY WITH REQUIREMENTS OF 2406.1 NCSBC.

9. AT ALL FIRE DOORS, OPENING PROTECTIVES WITH HOLD OPEN DEVICES SHALL RETURN TO THE CLOSED POSITION UPON ACTIVATION OF FIRE DETECTORS OR SMOKE DETECTORS OR LOSS OF POWER, WHICH AUTOMATICALLY RELEASES THE HOLD OPEN DEVICE AND ALLOWS THE DOOR TO CLOSE.

ABBREVIATIONS

XX	DOOR TAG
GL	GLASS
HM	HOLLOW METAL
PNT	PAINT
SCWD	SOLID CORE WOOD DOOR
ST	STAIN
AL	ALLUMINUM STORE FRONT

DOOR SCHEDULE

NO.	SIZE	DOOR/WINDOW				FRAME			HARDWARE									NOTES
		ELEV.	MATERIAL	LABEL	FINISH	MATERIAL	ELEV	FINISH	LOCKSET	PASSAGE SET	PRIVACY SET	PUSH/PULL	PANIC SET	DBL. ACTING HINGE	HVC CLOSER & HOLD OPEN	STOP		
EX	EXISTING TO REMAIN	--	--	--	--	--	--	--										--
104	3'-0" X 7'-0" X 1 3/4"	D-2	WD/GL	---	PNT	HM	F-1	PNT			●				●	●		---
105	3'-0" X 7'-0" X 1 3/4"	D-2	WD/GL	---	PNT	HM	F-1	PNT			●				●	●		---
106	3'-0" X 7'-0" X 1 3/4"	D-2	WD/GL	---	PNT	HM	F-1	PNT			●				●	●		---
107	3'-0" X 7'-0" X 1 3/4"	D-2	WD/GL	---	PNT	HM	F-1	PNT			●				●	●		---
108	3'-0" X 7'-0" X 1 3/4"	D-3	WD	---	PNT	HM	F-1	PNT	●							●		POCKET DOOR
110	3'-0" X 7'-0" X 1 3/4"	D-1	HM/GL	---	PNT	HM	F-1	PNT	●							●		---
111	3'-0" X 7'-0" X 1 3/4"	D-1	HM/GL	---	PNT	HM	F-1	PNT		●					●	●		---

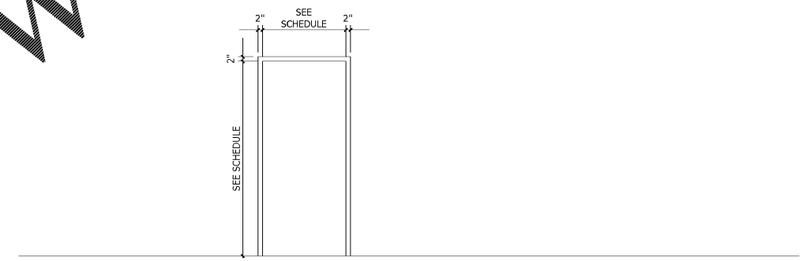

F-1

02 FRAME TYPES — scale: 1/2"=1'-0"

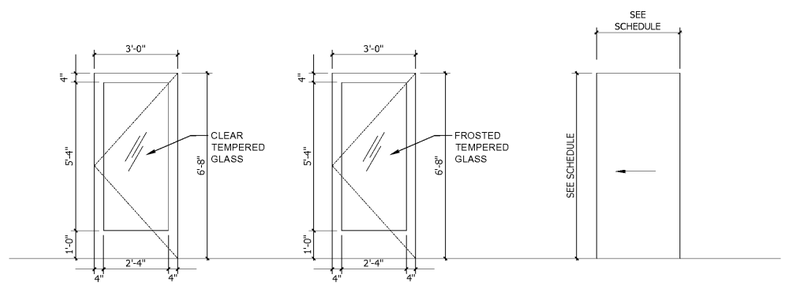

D-1 D-2 D-3

01 DOOR TYPES — scale: 1/2"=1'-0"

Order Plans @ WWW.LDILine.com

oda
overcash demmitt
2010 south tryon st. suite 1c
charlotte north carolina 28203
office 704.332.1615
web.www.odarch.com

STEPHEN F. OVERCASH
REGISTERED ARCHITECT
2978
NORTH CAROLINA
06.28.2019

Hustle House

ODA Project No. 183324

Charlotte, NC

FOR CONSTRUCTION

06.28.2019

REVISIONS

No.	Description	Date
	FOR CONSTRUCTION	09/10/18
	FOR CONSTRUCTION	06.28.19

DOOR TYPES & SCHEDULE

A-601