Order Plans @ www.LDILine.com

KEYED NOTES THIS SHEET

1. COORDINATE EXACT LOCATION OF THERMOSTAT WITH OWNER.
2. ROUTE CONDENSATE AT FULL SIZE FROM EQUIPMENT CONNECTION OUTSIDE BUILDING TO STORM DRAIN OR DRY WELL. COORDINATE EXACT LOCATION WITH SITE CIVIL. PROVIDE CONDENSATE PUMP AS REQUIRED BY FIELD CONDITIONS.
3. ROUTE FLUE/COMBUSTION AIR DUCT UP TO MANUFACTURER APPROVED WALL CAP ACCESSORY. SIZE AND INSTALL PER MANUFACTURER'S LITERATURE. MAINTAIN A MINIMUM OF 10'-0" CLEARANCE FROM ALL OUTSIDE AIR INTAKES.
4. COORDINATE LOCATION WITH EXISTING MECHANICAL PLATFORM TO MANUFACTURE CLEARANCES ARE MAINTAINED IN COORDINATION WITH EXISTING UNITS SERVING OTHER AREAS.
5. OUTSIDE AIR LOUVER EQUAL TO GREENHECK EHH-401, 24x18 WITH BIRD SCREEN AND 12" INSULATED PLENUM. MINIMUM FREE AREA OF 1.00 SQ.FT.
6. EXTEND EXHAUST TERMINATION FLUSH WITH BUILDING ABOVE REFER TO ARCHITECTURAL SET FOR EXTERIOR SOFFIT DETAIL.
7. UNDER CUT TO ALLOW ADDITIONAL MAKEUP AIR FOR DRYER.
8. USE EXISTING CONDUITS FOR LINE SETS WHERE POSSIBLE

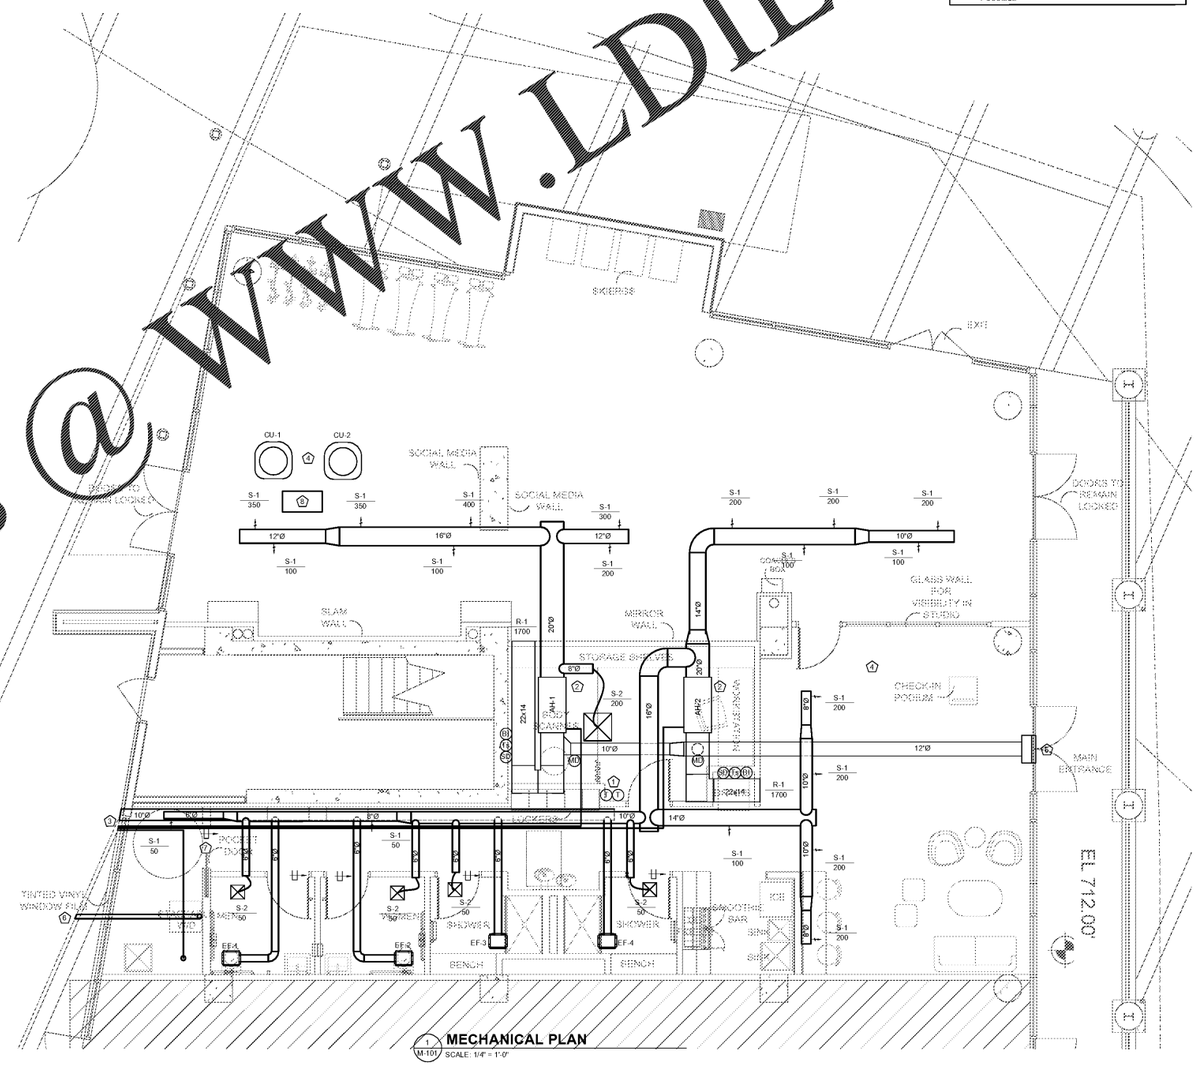

1 M-101 **MECHANICAL PLAN**
SCALE: 1/4" = 1'-0"

ODa
overcash demmitt
2010 south tryon st. suite 1a
charlotte north carolina 28203
office.704.332.1615
web.www.odarch.com

NORTH CAROLINA PROFESSIONAL 045819 ENGINEER BRANDON R. ALLRED
6/28/2019

WAVE ENGINEERING
1200 S. MAYT ST., SUITE 110
CHARLOTTE NC, 28203
704.900.4284
INFO@WAVEENGINEERING.COM
NC CORP. LICENSE #P-1927
WAVE #PROJECT #19128

Hustle House

ODA Project No. 183324

Charlotte, NC

FOR CONSTRUCTION

06.28.2019

REVISIONS

No.	Description	Date

MECHANICAL PLAN

M-101

Copyright 2017 Overcash Demmitt Architects