


RECEIVED  
MAR 21 2018  
1736 E. SPRINGFIELD ST. SUITE 417  
SPRINGFIELD, MISSOURI 65802

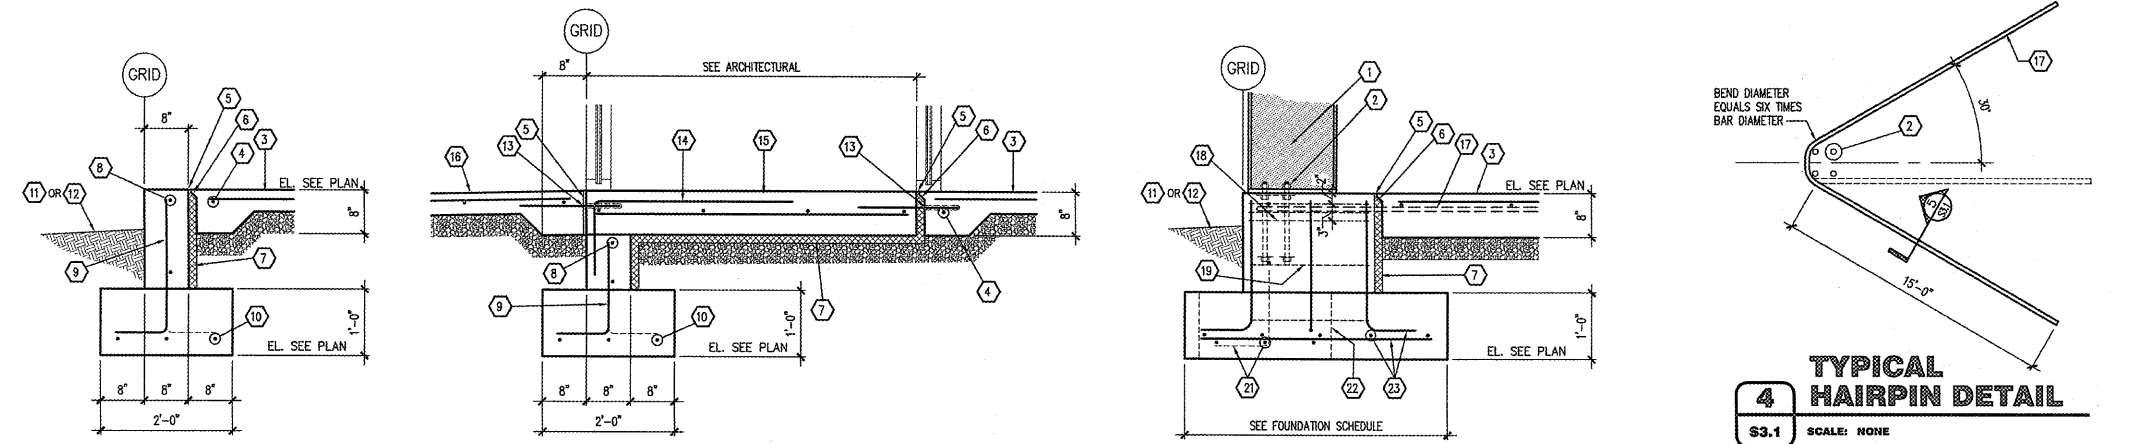


**1 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"


**2 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

**3 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"


**4 TYPICAL HAIRPIN DETAIL**  
S3.1 SCALE: NONE

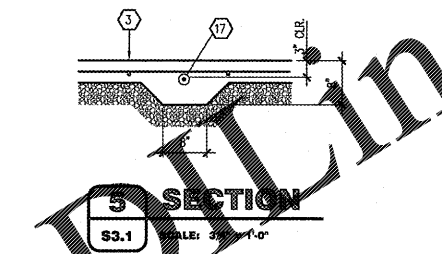


**5 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

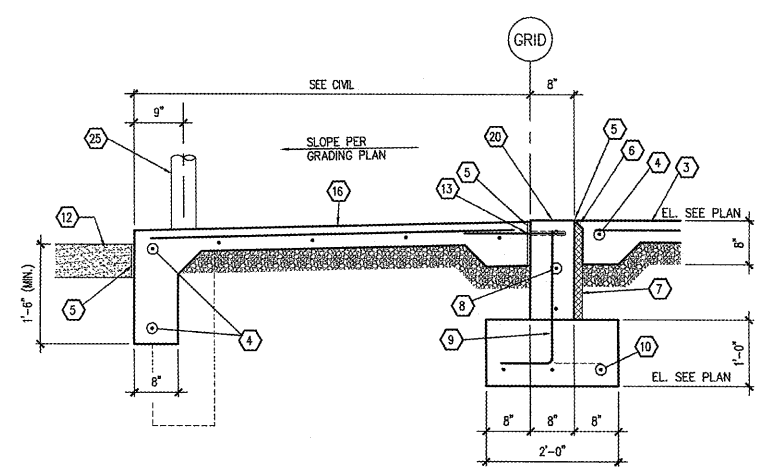


**6 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

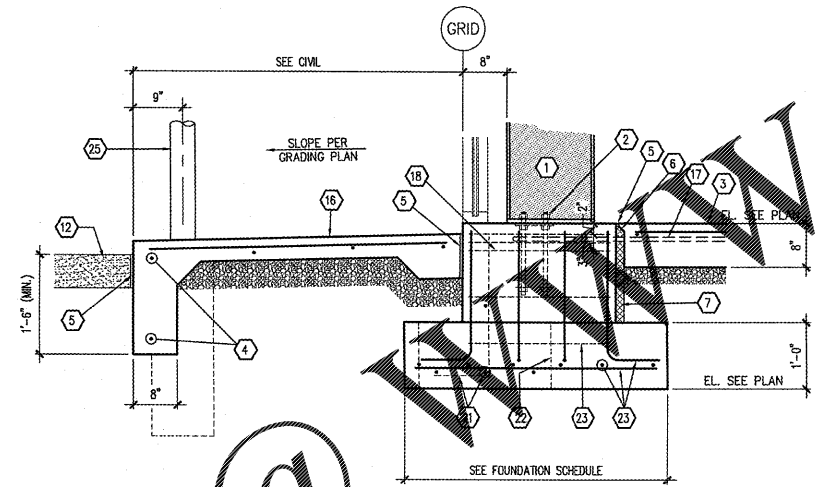


**7 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

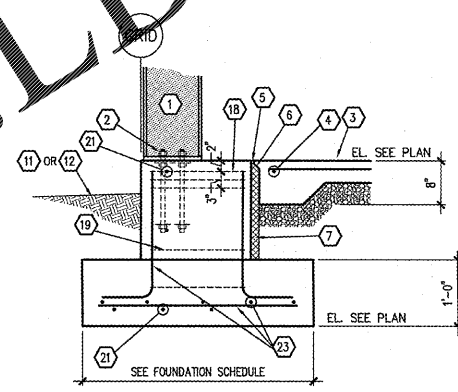


**8 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

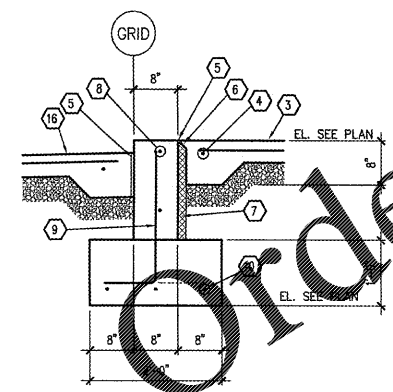

**9 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

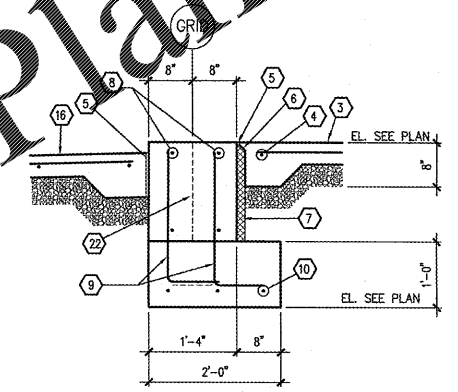

**10 SECTION**  
S3.1 SCALE: 3/4" = 1'-0"

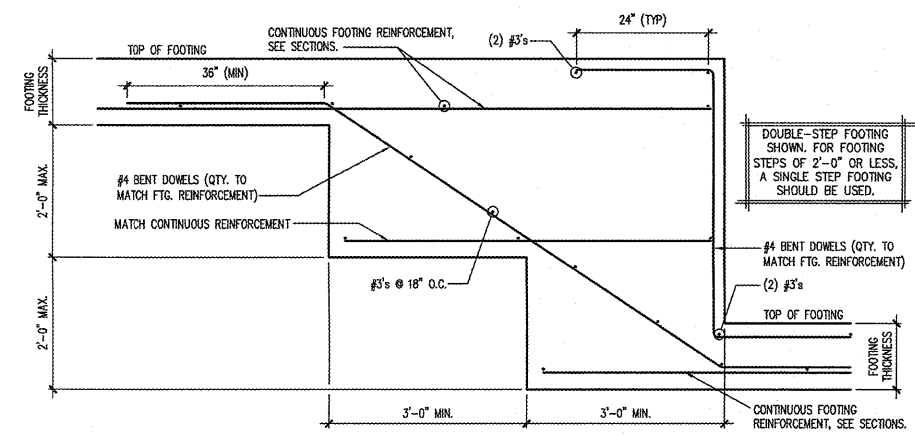

**11 TYPICAL STEPPED FOOTING**  
S3.1 SCALE: 3/4" = 1'-0" (IF NEEDED)

**KEYNOTES**

- 1 PRE-ENGINEERED METAL BUILDING STRUCTURAL SYSTEM. SEE P.E.M.B. SHOP DRAWINGS FOR ADDITIONAL INFORMATION.
- 2 ANCHOR BOLTS. SEE FOUNDATION SCHEDULE AND PRE-ENGINEERED METAL BUILDING DRAWINGS FOR SIZE, QUANTITY AND PLAN LOCATION. SEE 1/S3.2 FOR TYPICAL SHOP FABRICATED ANCHOR ASSEMBLY.
- 3 INTERIOR CONCRETE SLAB SEE FOUNDATION PLAN.
- 4 #4 CONTINUOUS
- 5 1/2" ISOLATION JOINT WITH ASPHALTIC FILLER & SEALANT
- 6 TAPER TOP OF RIGID INSULATION 45 DEGREES AS SHOWN. POUR SLAB OVER INSULATION.
- 7 RIGID INSULATION BOARD LOCATED AS SHOWN AT PERIMETER OF BUILDING. (R-10 MINIMUM REQUIRED).
- 8 #4's CONTINUOUS AT 12" O.C.
- 9 #4 BENT DOWELS @ 18" O.C. STAGGERED AS SHOWN
- 10 (3) #4's CONTINUOUS
- 11 SEE GRADING PLAN FOR FINISHED GRADES.
- 12 PAVING, SEE SITE DEVELOPMENT DRAWINGS FOR ADDITIONAL INFORMATION.
- 13 ENTRY LOCATIONS DRILL 6" DEEP HOLES FOR #4x1'-6" DOWELS @ 24" O.C. AND PLACE INTO FOUNDATION. FOLLOW ADHESIVE INSTRUCTIONS SPECIFIED BY MANUFACTURER.
- 14 3/4"-0" DOWEL @ 18" O.C. FIELD BEND AS SHOWN
- 15 ENTRY SLAB, SEE PLAN.
- 16 EXTERIOR CONCRETE SLAB OR SIDEWALK SEE FOUNDATION PLAN. REFER TO SITE DEVELOPMENT DRAWINGS FOR ALL EXTERIOR TOP OF CONCRETE ELEVATIONS.
- 17 #5 SLAB HAIRPIN. SEE DETAIL 4/S3.1
- 18 (3) #3 TIES @ 12" O.C.
- 19 #3 TIES @ 12" O.C.
- 20 PROVIDE EXTERIOR FINISH AT TOP OF STEM WALL (SLOPE AS NECESSARY) WITH SMOOTH TRANSITION BETWEEN TOP OF STEM WALL AND TOP OF SLAB.
- 21 STEM WALL AND FOOTING REINFORCEMENT TO RUN CONTINUOUS THROUGH COLUMN PILASTERS AND SPREAD FOOTINGS.
- 22 LINE OF STEM WALL AND FOOTING BEYOND
- 23 SEE FOUNDATION SCHEDULE FOR FOOTING & PILASTER REINFORCEMENT.
- 24 #4x4'-0" DOWEL CENTERED IN SLAB. TURN 45 DEGREES AS SHOWN
- 25 STEEL BOLLARD SEE SITE PLAN.
- 26 REFER TO SECTIONS FOR REBAR TIE SIZE AND SPACING.
- 27 #4 CORNER REINFORCEMENT TO MATCH STEM WALL BAR SPACING.

Order Plans @

WWW.LDOnline.com



**CRAIG A. SCHNIDER, AIA**  
ARCHITECT  
1736 East Sunshine, Suite 417  
Springfield, Missouri 65804  
e-mail: architect@estortyschneider.com  
417.862.0558  
417.862.3265

PROJECT:  
NEW O'REILLY AUTO PARTS STORE  
N. MAIN ST.  
WALNUT COVE, NC  
FOUNDATION DETAILS

**O'Reilly AUTO PARTS**  
CORPORATE OFFICES  
233 SOUTH PATTERSON  
SPRINGFIELD, MISSOURI 65802  
(417) 862-2674 TELEPHONE

COMM # 4300  
DATE: 3-22-19  
REVISION  
DATE:

**Jeffrey S. Smith, P.E.**  
Jeffrey S. Smith P.E. 12812  
1801 W 32nd St Bldg B Ste 104 \* JOPLIN, MISSOURI 64802  
P.O. Box 8102 \* JOPLIN, MISSOURI 64802  
PHONE: 417-524-0444 \* FAX: 417-524-0430