WINDOW SCHEDULE

MARK	WINDOW TYPES TYPE	MAT'L	LABEL	NO. REQUIRED/ SIZE (ROUGH OPENING)	FRAME TYPES TYPE	MAT'L	LABEL	DETAILS HEAD	JAMB	SILL	HDWR SET	GLAZ. TYPE	REMARKS
A	A	VINYL	--	5'-0" x 5'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
B	B	VINYL	--	3'-0" x 5'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
C	C	VINYL	--	2'-8" x 3'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
D	D	VINYL	--	6'-0" x 5'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
E	E	VINYL	--	3'-0" x 5'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
F	F	VINYL	--	3'-0" x 3'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG
G	G	VINYL	--	2'-0" x 3'-0"	SH	VINYL	--	3/A7.1	2/A7.1	1/A7.1	--	--	SINGLE HUNG

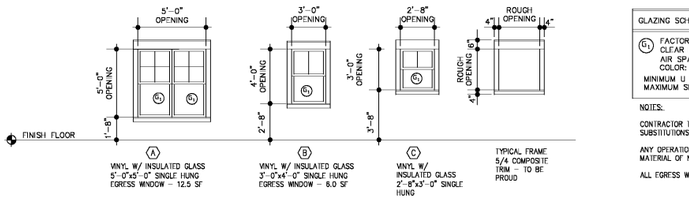

GLAZING SCHEDULE

G1 FACTORY GLAZED UNIT, 2 LAYERS OF CLEAR FLOAT GLASS W/ 1/2" AIR SPACE. TOTAL THICKNESS = 3/4" +/- COLOR: SOLAR GREY PPG
MINIMUM U VALUE = .65
MAXIMUM SHGC = 0.40

NOTES:

CONTRACTOR TO GET ARCHITECT AND OWNER APPROVAL FOR SUBSTITUTIONS.

ANY OPERATIONAL WINDOWS TO BE SCREENED WITH SCREENING MATERIAL OF NOT LESS THAN 16 MESH TO THE INCH.

ALL EGRESS WINDOWS TO HAVE MINIMUM 5.7 SF CLEARANCE.

SCHEDULE OF INTERIOR FINISHES - COMMON SPACES

ROOM NUMBER	SPACE	FLOOR	BASE	WALLS NORTH	WALLS EAST	WALLS SOUTH	WALLS WEST	CEILING MATERIAL	CEILING HEIGHT	DOOR FINISH	FRAME FINISH	REMARKS
	G-1 BLDG											
101	MULTI-PURPOSE	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
102	TOILET	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
103	MECHANICAL	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
104	JANITOR	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
	BREEZEWAY 1	CONC	WD/PT	PT	PT	PT	PT	EXT. GYP	9'-6"	WD/PT	HM/PT	
	BREEZEWAY 2	CONC	WD/PT	PT	PT	PT	PT	EXT. GYP	9'-6"	WD/PT	HM/PT	
	G-2 BLDG											
105	LAUNDRY	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
106	STORAGE	VINYL	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
107	MAINTENANCE	CONC.	WD/PT	PT	PT	PT	PT	GYP	9'-0"	WD/PT	HM/PT	
	BREEZEWAY 1	CONC	WD/PT	PT	PT	PT	PT	EXT. GYP	9'-6"	WD/PT	HM/PT	
	BREEZEWAY 2	CONC	WD/PT	PT	PT	PT	PT	EXT. GYP	9'-6"	WD/PT	HM/PT	
108	STORAGE	CONC.	WD/PT	PT	PT	PT	PT	GYP	9'-0"	HM/PT	HM/PT	

LEGEND

TBD = TO BE DETERMINED
VCB = VINYL COVE BASE
VWC = VINYL WALL COVERING
HM = HOLLOW METAL
PT = PAINT
GWB = GYPSUM BOARD
ACT = ACCOUSTICAL CEILING TILE
VCT = VINYL COMPOSITE TILE
C1 = CARPET 1
AL/GL = ALUMINUM / GLAZING
HDWD = HARDWOOD FLOORING
WD/PT = WOOD / PAINT

NOTES

1.) VERIFY COLOR SELECTION WITH OWNER PRIOR TO PURCHASE/ORDER OF MATERIALS.
2.) ARCHITECT TO APPROVE SUBMITTALS OF ALL FINISH MATERIALS PRIOR TO ORDER.
3.) ALL FINISH MATERIALS TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S PRINTED INSTRUCTIONS.
4.) PROVIDE PROPER TRANSITION STRIPS BETWEEN ALL FLOORING MATERIALS. ARCHITECT TO APPROVE.
5.) PAINT TO BE BENJAMIN MOORE SCRUBBABLE FLAT.
6.) FINISH SCHEDULE FOR TYPICAL UNIT PLAN. APPLY TO ALL UNITS.

DOOR SCHEDULE - COMMON SPACES

MARK	ROOM NAME	ROOM NO	DOOR and WINDOW TYPES TYPE	MAT'L	LABEL	NO. REQUIRED/ SIZE	FRAME TYPES	MAT'L	LABEL	DETAILS HEAD	JAMB	SILL DETAIL	HDWR SET	GLAZ. TYPE	REMARKS
	G-1 BLDG														
101	MULTI-PURPOSE	101	D	WD	20 MIN	3'-0" x 6'-8" x 1-3/4"	F-2	WD	20 MIN	H-2	J-2	S-2	--	--	WIRE GLASS, EXT. GRADE
102	MULTI-PURPOSE	101	E	WD	--	3'-0" x 6'-8" x 1-3/4"	F-2	WD	--	H-2	J-2	S-2	--	--	VISION GLASS, EXT. GRADE
103	TOILET	102	B	WD	--	2'-8" x 6'-8" x 1-3/4"	F-1	WD	--	H-1	J-1	S-1	--	--	--
	G-2 BLDG														
112	LAUNDRY	105	D	WD	--	3'-0" x 6'-8" x 1-3/4"	F-2	WD	--	H-2	J-2	S-2	--	--	WIRE GLASS, EXT. GRADE
113	STORAGE	106	B	WD	20 MIN	3'-0" x 6'-8" x 1-3/4"	F-2	WD	20 MIN	H-2	J-2	S-2	--	--	--
114	MAINTENANCE	107	B	WD	20 MIN	3'-0" x 6'-8" x 1-3/4"	F-2	WD	20 MIN	H-2	J-2	S-2	--	--	EXT. GRADE
115	MAINTENANCE	107	F	HM	--	3'-0" x 6'-8" x 1-3/4"	F-3	HM	--	H-3	J-3	S-3	--	--	GALVANIZED
116	MAINTENANCE	107	C	HM	--	10'-0" x 7'-0" x 1-3/4"	F-3	HM	--	H-3	J-3	S-3	--	--	EXT. GRADE, ROLL-UP
117	[illegible]	105	F	HM	90 MIN	3'-0" x 6'-8" x 1-3/4"	F-3	HM	--	H-4	J-4	S-4	--	--	--
118	STORAGE	108	F	HM	--	PR 3'-0" x 6'-8" x 1-3/4"	F-3	HM	--	H-3	J-3	S-3	--	--	GALVANIZED
119	STORAGE	108	--	--	--	3'-0" x 7'-0" FENCE GATE	--	--	--	--	--	--	--	--	LOCK BY OTHERS

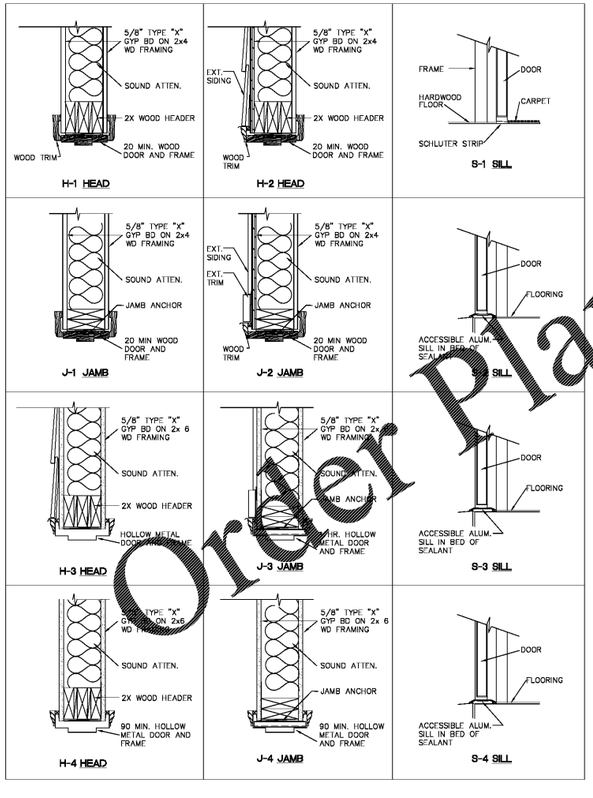

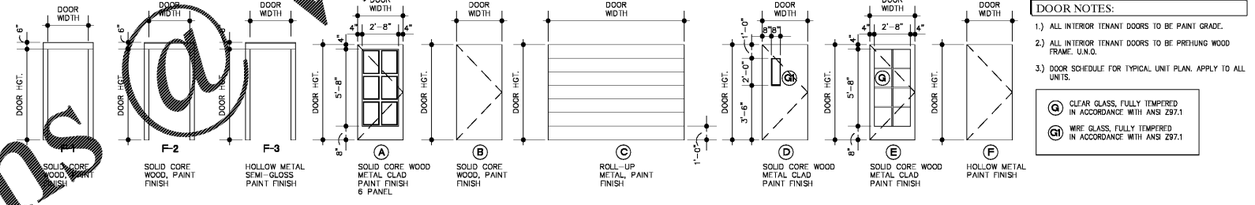

DOOR NOTES:

1.) ALL INTERIOR TENANT DOORS TO BE PAINT GRADE.
2.) ALL INTERIOR TENANT DOORS TO BE PREHUNG WOOD FRAME, U.N.O.
3.) DOOR SCHEDULE FOR TYPICAL UNIT PLAN. APPLY TO ALL UNITS.

G CLEAR GLASS, FULLY TEMPERED IN ACCORDANCE WITH ANSI Z97.1
G1 WIRE GLASS, FULLY TEMPERED IN ACCORDANCE WITH ANSI Z97.1

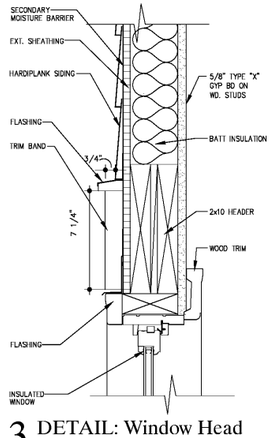

3 DETAIL: Window Head
SCALE: 3"=1'-0"

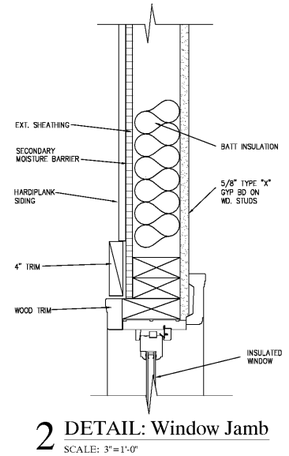

2 DETAIL: Window Jamb
SCALE: 3"=1'-0"

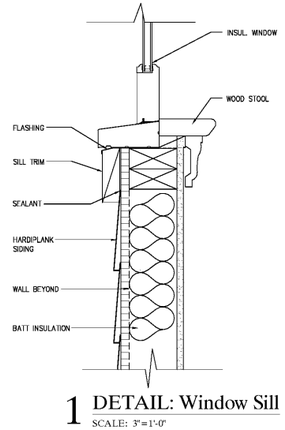

1 DETAIL: Window Sill
SCALE: 3"=1'-0"

Order Plans @ WWW.LDLine.com

Pate Design Group, Inc.
Architecture / Interiors
4168 Abbotts Bridge Road
Duluth, Georgia 30097
(p) 770.814.0885
(f) 770.814.0886
Kirby@patedesigngroup.com

G-1 AND G-2
WISTERIA RIDGE
Will-O-War LLC
75 North Main Street
Watkinsville, GA 30677

Issue & Revisions:

No.	Date	Description
1	04.01.19	CLARIFICATION

DOOR + FINISH SCHEDULES, NOTES + DETAILS

Drawn MWB
Checked KEP
Contract No. 07-03
Scale AS NOTED

STATE OF GEORGIA KIRBY E. PATE 001 REGISTERED ARCHITECT

A7.1
040119 of sheets

THIS DRAWING IS THE PROPERTY OF PATE DESIGN GROUP AND IS NOT TO BE COPIED IN WHOLE OR IN PART. IT IS TO BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN AND IS NOT TO BE USED IN ANY OTHER PROJECT. IT IS TO BE RETURNED UPON REQUEST.

RELEASED FOR CONSTRUCTION