

1 WING B - 3-5 CLASSROOMS
 A1.2 SCALE: 1/8" = 1'-0"

2 WING B - 3-5 CLASSROOMS
 A1.2 SCALE: 1/8" = 1'-0"

RENOVATIONS LEGEND

GENERAL NOTES

CEILING
 1. REPLACEMENT CEILING SHALL BE INSTALLED AT SAME HEIGHT AS EXISTING POLISHED CEILING.
 2. COORDINATE NEW CEILING INSTALLATION WITH EXISTING FIRE SPRINKLER HEADS.
 3. ALL DRYWALL SOFFITS, HEADERS OR CEILING TO RECEIVE NEW PAINT (PT-2).
 4. ALL NEW EXPOSED MECHANICAL DEVICES AND LIGHT FIXTURES SHALL BE 2'-0" X 2'-0" SHALL BE CENTERED IN TILE.
 5. FOR EXISTING DUCTWORK TO REMAIN, DUCTWORK SHALL BE CLEANED.
 6. REFERENCE ELECTRICAL AND MECHANICAL PLANS FOR ADDITIONAL INFORMATION PERTAINING TO CEILING AND ABOVE CEILING SCOPE.

DOORS
 1. WHERE NEW DOORS ARE SCHEDULED TO BE INSTALLED IN MASONRY OPENINGS, PROVIDE NEW 3/4" THICK STEEL PLATE LUNETTE, SETTING A MINIMUM OF 8" INCHES BEYOND MASONRY OPENING, SIMILAR TO THROUGH-WALL PENETRATION DETAIL 2/A1.0.

SPECIALTIES
 1. DEMOLISH EXISTING MIRRORS IN STUDENT RESTROOMS. PATCH WALLS PRIOR TO PAINTING. REPLACE WITH NEW WALL MIRROR UNIT. WHERE INDICATED IN FINISHED FLOOR PLAN.
 2. REPLACE ALL PLASTIC LAMINATE COUNTERTOPS WITH NEW SOLID SURFACE COUNTERTOPS. ALL OTHER CASINOWORK BASES AND WALL CABINETS TO REMAIN. PROTECT PRIOR TO PAINTING.
 3. **NEW WALL MOUNT UNITS:** EXISTING TACKBOARDS LOCATED WHERE NEW WALL MOUNT UNITS ARE INSTALLED SHALL BE DEMOLISHED. PROVIDE NEW TACKBOARDS, IN SIZES NOTED ON DRAWINGS, CENTERED ON WALL BETWEEN WALL MOUNT UNIT AND ADJACENT WALL CONDITION. FIELD VERIFY ALL CLEARANCES PRIOR TO PURCHASE.

DRAWING NOTES - RENOVATION PLAN (P#)
 A01. EXISTING BASE AND CABINETS WILL REMAIN. REPLACE COUNTERTOP WITH SOLID SURFACE COUNTERTOP. REFER TO PLUMBING FOR ADDITIONAL INFORMATION.
 A02. EXISTING TACKBOARDS TO REMAIN. TYPICAL EVERY CLASSROOM. TO REMAIN. PROTECT PRIOR TO PAINTING.
 A03. TYPICAL TALL CASINOWORK ASSEMBLY. TYPICAL EVERY CLASSROOM. PROTECT THROUGHOUT.
 A04. NEW WOOD DOOR AND HOLD METAL FRAME ASSEMBLY FROM NEW STORAGE ROOM TO CORRIDOR. REFER TO FINISH SCHEDULE FOR TAILED INFORMATION.
 A05. EXISTING SERVING LINE TO BE REPLACED WITH NEW SERVING LINE. REFER TO OVERALL MODIFICATIONS PLAN FOR OVERALL SCOPE.
 A06. EXISTING FRP TOILET STALL DOORS TO BE RE-PANED. COORDINATE WARRANTED SURFACE PREPARATION AND INSTALLATION WITH PAINT MANUFACTURER.
 A07. PROVIDE NEW ACENT STRIPS, 2 COURSES WIDE TO EXTEND FROM CEILING, THROUGHOUT ALL CORRIDORS. PAINT PT-6.
 A08. EXISTING ACOUSTICAL WALL PANEL TO REMAIN, REMOVE TO PAINT. RE-INSTALL.
 A09. PROVIDE NEW ELECTRIC HAND DRYERS, INSTALL AT 8'0" F.F. THIS LOCATION. REFER TO ELECTRICAL FOR MORE INFORMATION.
 A10. REPLACE WATER COOLERS. REFERENCE PLUMBING DRAWINGS.
 A11. EXISTING RESILIENT TREADS AND RISERS TO BE REPLACED WITH NEW NEW RESILIENT TREADS AND RISERS. (PT-1)
 A12. EXISTING MARKERBOARD AND SMARTBOARD ASSEMBLY TO REMAIN, TYPICAL ALL CLASSROOMS. PROTECT PRIOR TO PAINTING.
 A13. EXISTING BLACK AND GREEN WALL FINISH TO REMAIN. DO NOT PAINT.
 A14. EXISTING NSF EQUIPMENT TO BE RE-LOCATED TO THE DUNLEITH.
 A15. EXISTING CASEWORK, INCLUDING COUNTERTOP, TO BE DEMOLISHED. PREPARE FOR NEW WALL FINISH.
 A16. NEW SERVING LINE DOUBLE DOOR ASSEMBLY AT EXISTING SINGLE DOOR CONDITION.
 A17. PAINT HANDRAILS, PT-3.

DRAWING NOTES - REFLECTED CEILING PLAN (C#)
 C01. PROVIDE NEW ACT CEILING ASSEMBLY. TYPE AS NOTED. INSTALLED AT 10'-0" A.F.F. PROVIDE 1/2" THICK, FOL FACED INSULATION THROUGHOUT. REFERENCE TO ELECTRICAL/MECHANICAL FOR ADDITIONAL WORK.
 C02. NO WORK ON CEILING. REFERENCE TO MECHANICAL AND ELECTRICAL FOR ADDITIONAL WORK.
 C03. EXISTING EXPOSED STRUCTURE TO REMAIN. PROVIDE PAINT WITH DRY FALL GFI'S INSTALLATION. REPLACE EXISTING LIGHT FIXTURES WITH NEW LIGHT FIXTURES. REFERENCE TO ELECTRICAL FOR ADDITIONAL WORK.
 C04. EXISTING HVAC COLLECT WORK TO REMAIN. DUST AND CLEAN. REFER TO MECHANICAL FOR ADDITIONAL WORK.
 C05. EXISTING DRYWALL HEADERS, DROPPED SOFFIT, AND CEILING ASSEMBLY TO REMAIN. PROVIDE NEW PAINT (PT) ON ALL EXPOSED SURFACES.
 C06. EXISTING STAINLESS STEEL CEILING TILES TO BE SALVAGED AND RE-INSTALLED, IF POSSIBLE. OTHERWISE, PROVIDE NEW ACT-3, STAINLESS STEEL AT A MINIMUM OF 2'-0" AROUND PERIMETER OF EXISTING HOOD ASSEMBLY. REFER TO MECHANICAL FOR ADDITIONAL WORK.
 C08. EXISTING CEILING IN ALCOVE VESTIBULE TO BE RE-PANED (PT-A2).
 C09. EXISTING ACT CEILING ASSEMBLY, LIGHT FIXTURES AND CEILING DEVICES TO BE DEMOLISHED. PROVIDE NEW ACT ASSEMBLY CEILING, TYPE AS NOTED. INSTALLED AT THE SAME HEIGHT AS ORIGINAL CEILING. PROVIDE INSULATION AROUND ALL FIRE SPRINKLER PIPES ABOVE CEILING. REFER TO MECHANICAL AND ELECTRICAL FOR ADDITIONAL WORK.
 C10. INSTALL INSULATED COMPOSITE BOARD WITH GLASS MAT FIBER BOARD OVER POLYISOCYANURATE INSULATOR AT HOOD STRUCTURE TO SEAL INSIDE WALL. THIS LOCATION.
 C11. SEAL OFF SOFFIT VENTS ALONG BOTH SIDES OF CONNECTION CORRIDOR.
 C12. PROVIDE ACCESS HATCHES IN HARD CANOPY, IF REQUIRED, TO WIRE AND SERVICE NEW HARD CANOPY LIGHTING INSTALLATIONS.

NO.	DESCRIPTION	DATE

CEILING SCHEDULE

ACT-1 NEW ACOUSTICAL CEILING TILE, TYPE 1
 ACT-2 NEW ACOUSTICAL CEILING TILE, TYPE 2 (SEALABLE)
 ACT-3 EXISTING ACOUSTICAL CEILING TILE, TYPE 3 (STAINLESS) - SALVAGE AND RE-USE, IF POSSIBLE
 ACT-4 NEW ACOUSTICAL CEILING TILE, TYPE 4 (HIGH MFC)
 ACT-5 EXISTING EXTERIOR D.E.F.S. CEILING TO BE PAINTED
 EX-1 EXISTING DRYWALL BOARD HEADERS TO BE PAINTED
 EX-2 EXISTING HARD CEILING TO REMAIN. REFERENCE RENOVATION SCHEDULE FOR FINISHING SCOPE
 EX-3 EXPOSED TO STRUCTURE



INTERIOR PARTITION SCHEDULE

EXISTING PARTITION
 EXISTING 1-HR FIRE RATED PARTITION SEALED TO STRUCTURE ABOVE
 EXISTING 2-HR OR HIGHER, FIRE RATED PARTITION SEALED TO STRUCTURE ABOVE
 EXISTING SMOKE PARTITION

SYMBOL LEGEND

ROOM NUMBER
 DRAWING NOTE REFERENCE - SEE DRAWING NOTES THIS PAGE
 DOOR NUMBER - SEE DOOR SCHEDULE SHEET A5.0
 ATYPICAL FLOOR TRANSITION
 CEILING MATERIAL
 INSTALL HT. A.F.F. (IF NEW)

PHF RECESSED LIGHT FIXTURE
 PNF PENDING LIGHT FIXTURE
 1" PHF DIM LED LIGHT FIXTURE
 RECESSED CAN
 WALL PACK LIGHTING
 NEW INSULATION CONTINUOUS ABOVE CEILING
 SUPPLY RETURN/EXHAUST

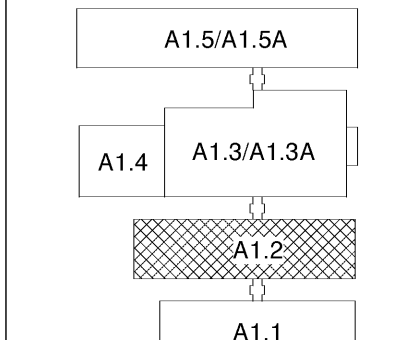

08/30/2019

DUNLEITH ELEMENTARY SCHOOL
 RENOVATIONS & MODIFICATIONS
 120 SAINE DR. SW
 MARIETTA, GA 30008 (781-0194)
 MARIETTA CITY SCHOOLS

WING B- CLASSROOMS- PARTIAL RENOVATION PLANS REFLECTED CEILING PLAN

DATE: 08/30/2019
 PROJECT NO.: 18122
A1.2

9/4/2019 2:08:26 PM