KEY NOTES: (THIS SHEET ONLY)

1. REPLACE EXISTING GAS/ELECTRIC PAD-MOUNT UNIT. UTILIZE EXISTING CONCRETE PAD. EXPAND PAD AS REQUIRED FOR NEW UNIT HORIZONTAL DISCHARGE/INTAKE TO ALIGN WITH EXISTING DUCT OPENINGS. PROVIDE ALL NECESSARY FITTINGS/DUCTS/TRANSITIONS AS REQUIRED FOR CONNECTION OF EXISTING SUPPLY AND RETURN DUCTWORK. ALL REQUIRED NEW EXTERIOR DUCTWORK/FITTINGS SHALL BE INTERNALLY LINED.
2. PROVIDE NEW FENCING AROUND UNIT. SEE ARCH.
3. ROUTE CONDENSATE TO NEAREST DRAIN INLET.
4. CLEAN, SEAL, AND PAINT ALL EXISTING DUCTWORK AND DRUM LOUVERS. EXISTING DRUM LOUVERS TO REMAIN.

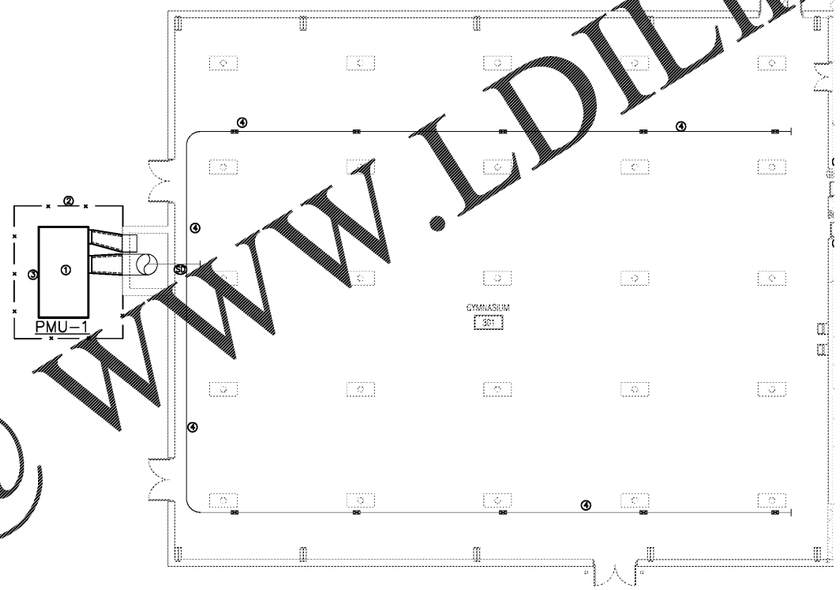

1 / M1.4 WING C GYMNASIUM-HVAC RENOVATION PLAN
1/8" = 1'-0"



KEY PLAN

Order Plans @ WWW.LDILine.com

BXA
Breaux & Associates
ARCHITECTS
5965 Shiloh Road East, Suite 240
Alpharetta, Georgia 30005 | (678) 585-4506

GEORGIA REGISTERED PROFESSIONAL ENGINEER JOHN E. MAYER

08/30/2019

BAA MECHANICAL ENGINEERS INC
300 Bishop Street Suite F-3 Atlanta, GA 30318 tel: 404.333.1500

NO	DESCRIPTION	DATE

DUNLEITH ELEMENTARY SCHOOL RENOVATIONS & MODIFICATIONS
120 SAINE DR. SW
MARIETTA, GA 30008

MARIETTA CITY SCHOOLS

WING C GYMNASIUM-HVAC RENOVATION PLAN

DATE 08/30/2019
PROJECT NO. 18122

M1.4