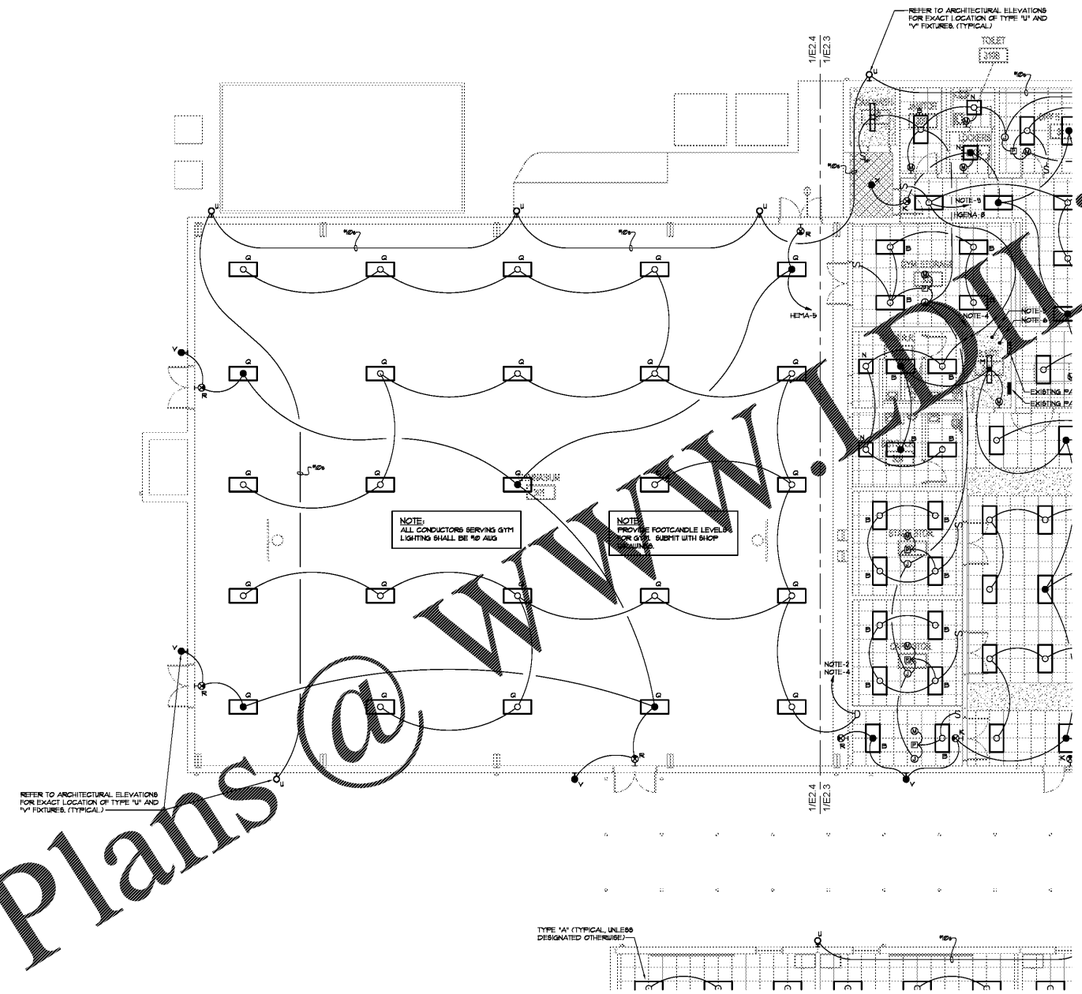

1 E2.4 PARTIAL FLOOR PLAN - BLDG 300 (GYM) - LIGHTING

SCALE: 1/8" = 1'-0"

NOTES:

- WALL MOUNTED ELECTRICAL DEVICES SHALL NOT BE INSTALLED BACK-TO-BACK.
- EACH "HOT" SHALL HAVE A DEDICATED NEUTRAL. SHARING OF NEUTRALS IS NOT ALLOWED.
- UL LISTED, FIRE RATED, PUTTY PADS SHALL BE INSTALLED ON ALL JUNCTION BOXES INSTALLED IN RATED WALLS.
- INSTALL BLANK STAINLESS STEEL COVERPLATES OVER ANY UNUSED LIGHT SWITCH JUNCTION BOXES.

ELECTRICAL NOTES

1. DURING NORMAL CONDITIONS EMERGENCY FIXTURE SHALL BE DIMMED WITH OTHER FIXTURES IN THE ROOM. DURING AN "OUTAGE", FIXTURE SHALL BE CONNECTED TO EMERGENCY CIRCUIT, VIA RELAY, AND OPERATE AT FULL BRIGHTNESS.
2. ROUTE CIRCUIT THRU "INTERIOR LIGHTING CONTACTOR".
3. ROUTE CIRCUIT THRU "EXTERIOR LIGHTING CONTACTOR".
4. EXTEND AND CONNECT TO AN EXISTING 20A/1P BREAKER IN EXISTING 277/480 VOLT LIGHTING PANEL. PROPERLY UPDATE PANEL DIRECTORY.

Order Plans @ WWW.LDLine.com

B&A Breaux & Associates ARCHITECTS
5955 Shiloh Road East, Suite 200
Alpharetta, Georgia 30005 | (673) 585-4508

GEORGIA No. PE020810 PROFESSIONAL ENGINEER J. KEITH MATHIS
09-03-2019

MATHIS & ROBERDS CONSULTING ENGINEERS
244 O'DELL ROAD, SUITE 6
GRIFFIN, GEORGIA 30224
TELEPHONE 770-228-8160

2019-602 JKM

NO	DESCRIPTION	DATE

DUNLEITH ELEMENTARY SCHOOL
RENOVATIONS & MODIFICATIONS
120 SAINE DR. SW
MARIETTA, GA 30008

MARIETTA CITY SCHOOLS

KEY PLAN



PARTIAL FLOOR PLAN - BLDG. 300 GYM-LIGHTING

DATE 08/30/2019

PROJECT NO. 18122

E2.4

Dunleith Elem School - Renovations