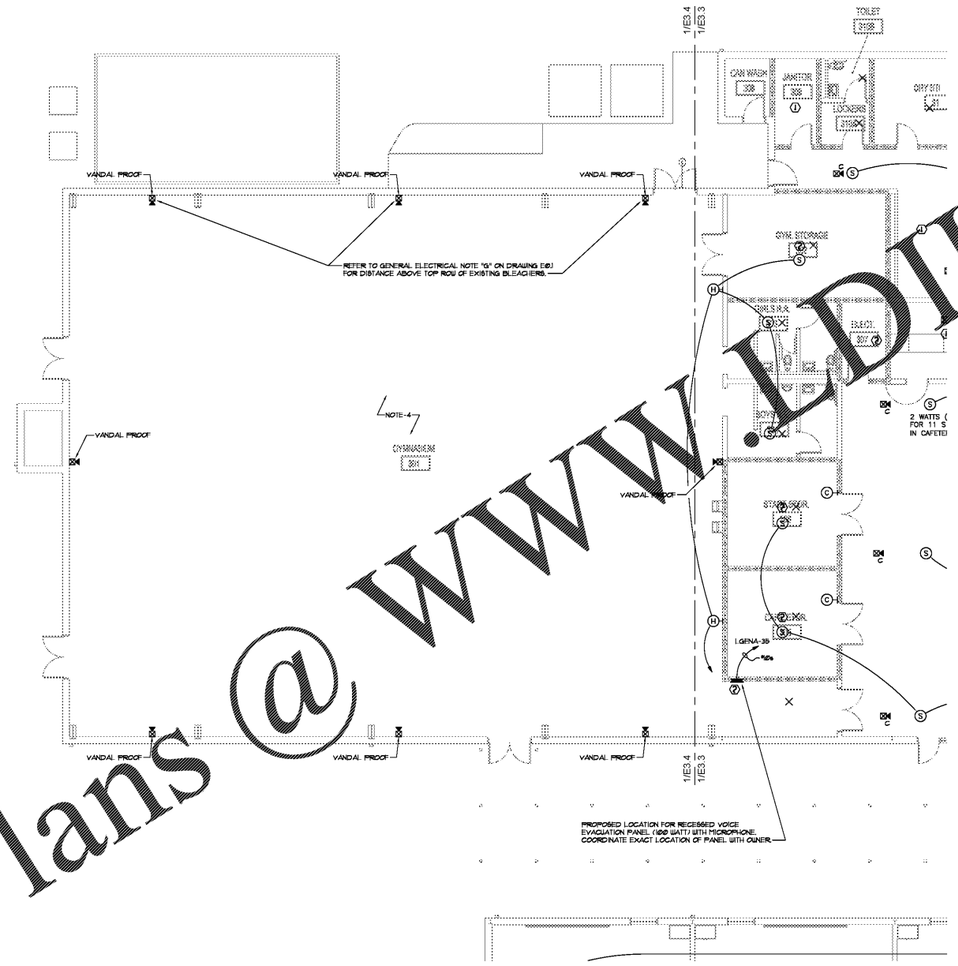

1 / E3.4 PARTIAL FLOOR PLAN - BLDG 300 (GYM) - SYSTEMS

SCALE: 1/8" = 1'-0"

INTERCOM SYMBOL LEGEND

A	ADMIN PHONE
AUX	3.5MM AUDIO INPUT JACK
C	EXISTING CALL STATION TO BE BLANKED OFF (NEW STAINLESS STEEL COVERPLATE) (REFER TO GENERAL ELECTRICAL NOTE "W")
S EX	EXISTING GYPSUM SPEAKER TO REMAIN
H	WIDE ANGLE PAGING PROJECTOR
S	NEW 2x2 LAY-IN SPEAKER
S WP	WEATHERPROOF SPEAKER WITH STAINLESS STEEL GRILL

ELECTRICAL NOTES

1. REFER TO DETAIL 2/E3.1. INSTALL 2 ⌀ 4" CONDUITS THROUGH RATED WALL. SPACE CONDUITS AT LEAST 4" APART.
2. INSTALL 2 ⌀ 4" CONDUITS ABOVE HARD CEILING. SPACE CONDUITS AT LEAST 4" APART.
3. REFER TO DETAIL 3/E3.1.
4. REFER TO GENERAL ELECTRICAL NOTES "E", "I", "J", "K", "L", "G", "U", "W", "X", AND "Y" ON DRAWING E0.1.

Order Plans @ WWW.LDILine.com

BXA Breaux & Associates ARCHITECTS
5955 Shiloh Road East, Suite 200
Alpharetta, Georgia 30005 | (673) 585-4508

No. PE029810 PROFESSIONAL ENGINEER KEITH MATHIS
09-03-2019

MATHIS & ROBERDS CONSULTING ENGINEERS
244 O'DELL ROAD SUITE 6
GRIFFIN, GEORGIA 30224
TELEPHONE 770-228-8160

2019-602 JKM

NO	DESCRIPTION	DATE

DUNLEITH ELEMENTARY SCHOOL RENOVATIONS & MODIFICATIONS
120 SAINE DR. SW
MARIETTA, GA 30008

MARIETTA CITY SCHOOLS

KEY PLAN



PARTIAL FLOOR PLAN - BLDG. 300 GYM-SYSTEMS

DATE 08/30/2019

PROJECT NO. 18122

E3.4

Dunleith Elem School - Renovations