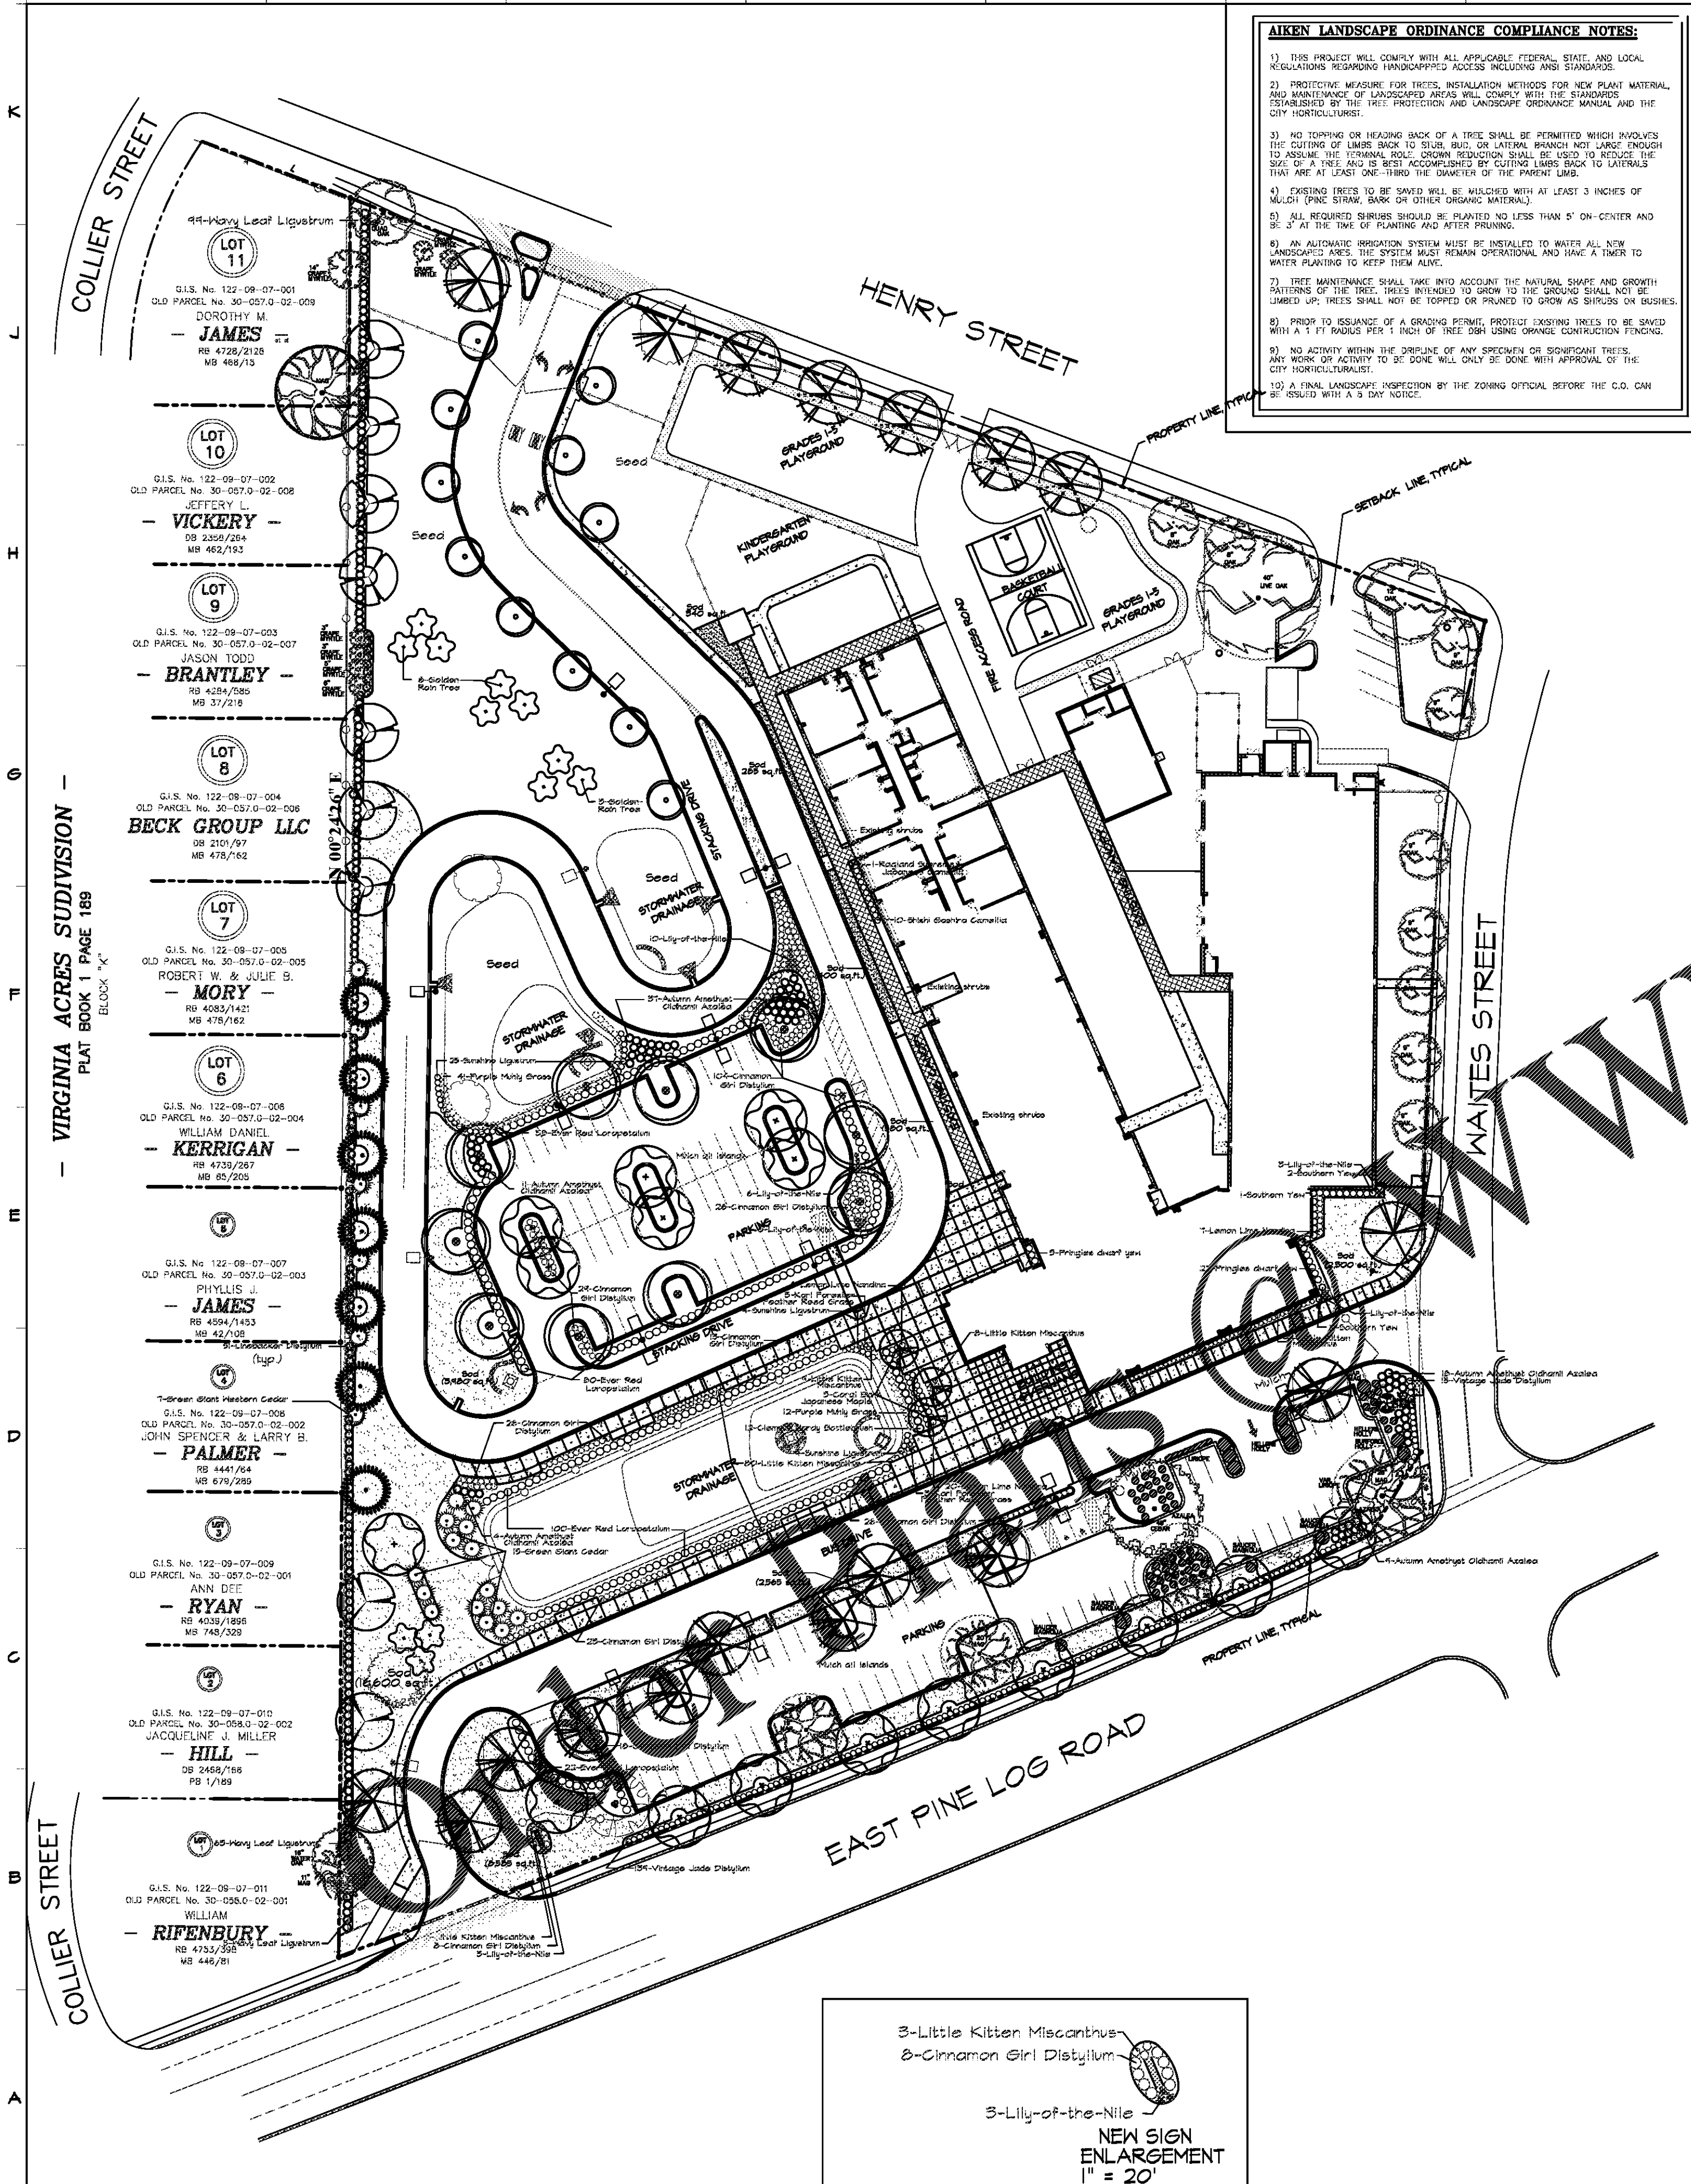

AIKEN LANDSCAPE ORDINANCE COMPLIANCE NOTES:

1) THIS PROJECT WILL COMPLY WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL REGULATIONS REGARDING HANDICAPPPED ACCESS INCLUDING ANSI STANDARDS.

2) PROTECTIVE MEASURE FOR TREES, INSTALLATION METHODS FOR NEW PLANT MATERIAL, AND MAINTENANCE OF LANDSCAPED AREAS WILL COMPLY WITH THE STANDARDS ESTABLISHED BY THE TREE PROTECTION AND LANDSCAPE ORDINANCE MANUAL AND THE CITY HORTICULTURIST.

3) NO TOPPING OR HEADING BACK OF A TREE SHALL BE PERMITTED WHICH INVOLVES THE CUTTING OF LIMBS BACK TO STUB, BUD, OR LATERAL BRANCH NOT LARGE ENOUGH TO ASSUME THE TERMINAL ROLE. CROWN REDUCTION SHALL BE USED TO REDUCE THE SIZE OF A TREE AND IS BEST ACCOMPLISHED BY CUTTING LIMBS BACK TO LATERALS THAT ARE AT LEAST ONE-THIRD THE DIAMETER OF THE PARENT LIMB.

4) EXISTING TREES TO BE SAVED WILL BE MULCHED WITH AT LEAST 3 INCHES OF MULCH (PINE STRAW, BARK OR OTHER ORGANIC MATERIAL).

5) ALL REQUIRED SHRUBS SHOULD BE PLANTED NO LESS THAN 5' ON-CENTER AND BE 3' AT THE TIME OF PLANTING AND AFTER PRUNING.

6) AN AUTOMATIC IRRIGATION SYSTEM MUST BE INSTALLED TO WATER ALL NEW LANDSCAPED ARES. THE SYSTEM MUST REMAIN OPERATIONAL AND HAVE A TIMER TO WATER PLANTING TO KEEP THEM ALIVE.

7) TREE MAINTENANCE SHALL TAKE INTO ACCOUNT THE NATURAL SHAPE AND GROWTH PATTERNS OF THE TREE. TREES INTENDED TO GROW TO THE GROUND SHALL NOT BE LIMBED UP; TREES SHALL NOT BE TOPPED OR PRUNED TO GROW AS SHRUBS OR BUSHES.

8) PRIOR TO ISSUANCE OF A GRADING PERMIT, PROTECT EXISTING TREES TO BE SAVED WITH A 1 FT RADIUS PER 1 INCH OF TREE DBH USING ORANGE CONTRUCTION FENCING.

9) NO ACTIVITY WITHIN THE DRIPLINE OF ANY SPECIMEN OR SIGNIFICANT TREES. ANY WORK OR ACTIVITY TO BE DONE WILL ONLY BE DONE WITH APPROVAL OF THE CITY HORTICULTURALIST.

10) A FINAL LANDSCAPE INSPECTION BY THE ZONING OFFICIAL BEFORE THE C.O. CAN BE ISSUED WITH A 5 DAY NOTICE.

P L A N T   L I S T

Quantity	Code Name	Scientific Name	Common Name	Planting Size
3	ASK	Acer palmatum 'Sango Kaku'	Coral Bark Japanese Maple	7'-8'
31	AH	Agapanthus 'Headbourne Hybrid'	Lily-of-the-Nile	2-Gal
6	CKF	Calamagrostis x acutiflora 'Karl Forester'	Karl Forester Feather Reed Grass	3-Gal
12	CRC	Callistemon rigidus 'Clemson Hardy'	Clemson Hardy Bottlebrush	3-Gal
1	CRS	Camellia japonica - 'Ragland Supreme	Ragland Supreme Japanese Camellia	7-Gal
10	CSS	Camellia sasanqua 'Shishi Gashira'	Shishi Gashira Camellia	3-Gal
283	DCG	Distylium 'Cinnamon Girl'	Cinnamon Girl Distylium	3-Gal
145	DVJ	Distylium 'Vintage Jade' PP 23,128	Vintage Jade Distylium	3-Gal
51	DL	Distylium First Edition 'Linebacker'	Linebacker Distylium	3-Gal
10	GAG	Ginkgo biloba 'Autumn Gold'	Autumn Gold Ginkgo	3"-Cal
11	GBS	Ginkgo biloba 'Prinseton Sentry'	Princeton Sentry Ginkgo	3"-Cal
12	KP	Koelreuteria paniculata	Golden-Rain tree	2"-Cal
161	LR	Ligustrm japonicum 'Recurvifolium'	Wavy Leaf Ligustrum	5-Gal
33	LSS	Ligustrum sinense 'Sunshine'	Sunshine Ligustrum	3-Gal
240	LCE	Loropetalum chinense 'Chang Nian Hong'	Ever Red Loropetalum	3-Gal
1	MG	Magnolia grandiflora 'Claudia Wannamaker'	Claudia Wannamaker Southern Magnolia	4 - 4 1/2"-Cal
7	MLK	Metasequoia glyptostroboides	Dawn redwood	3"-Cal
143	MUG	Miscanthus sinensis 'Little Kitten'	Little Kitten Miscanthus	3-Gal
54	NLL	Mulhenbergia filipes	Purple Muhly Grass	3-Gal
33	NLL	Nandina domestica 'Lemon Lime'	Lemon Lime Nandina	3-Gal
16	NSW	Nyssa sylvatica 'Wildfire'	Wildfire Black Gum	2 1/2"-Cal
5	PMM	Podocarpus macrophyllus 'Maki'	Southern Yew	7-Gal (upright)
25	PMP	Podocarpus macrophyllus 'Pringles'	Pringles Dwarf Yew	3-Gal
9	QPW	Quercus phellos 'Wynstar'	Wynstar Willow Oak	3"-Cal
79	ROAA	Rhododendron oldhamii 'Autumn Amethyst'	Autumn Amethyst Oldhamii Azalea	3-Gal
2	SAN	Salix nigra 'Niobe'	Niobe Golden Willow	2"-Cal
22	TGG	Thuja x 'Green Giant'	Green Giant Westren Cedar	7-8', 2" Cal.
18	UPA	Ulmus parvifolia 'Emer II' Alee	Allee Lacebark Elm	3"-Cal

Mulch all plantings with 3" longleaf pine straw.
Sod shall be Tif 419 Bermuda.
Contractor shall use the Plant List as a reference but he shall make his own plant take-off.

(16) Wildfire Black Gum	3"-Cal	16 x 3 = 48 Cal In
(10) Autumn Gold Ginkgo	3"-Cal	10 x 3 = 30 Cal In
(1) Claudia Wannamaker Southern Magnolia	6"-Cal	1 x 6 = 6 Cal In
(18) Allee Lacebark Elm	3"-Cal	18 x 3 = 54 Cal In
(9) Wynstar Willow Oak	3"-Cal	9 x 3 = 27 Cal In
(2)-Niobe Golden Willow	2"-Cal	Not counted
(11) Princeton Sentry Ginkgo	3"-Cal	11 x 3 = 33 Cal In
(3) Coral Bark Japanese Maple	7-8'	Not counted
(7) Dawn redwood	3"-Cal	7 x 3 = 21 Cal In
(12)-Golden-Rain Tree	2"-Cal	12 x 2 = 24 Cal In
(22) Green Giant Western Cedar	2"-Cal	22 x 2 = 44 Cal In
Existing tree		
Existing shrub		



TREE PLANTING

SCALE: NOT TO SCALE



SHRUB BED EDGE DETAIL

SECTION - NO SCALE



SHRUB PLANTING DETAIL

SECTION - NO SCALE

GRAPHIC SCALE



(IN FEET)
1 inch = 40 ft.

811 Know what's below. Call before you dig.





Architectural Firm
A Landscape
Davis Design Group
Registered Landscape Architect
P.O. Box 269
Augusta, Georgia 30903
120 Fifth Street
Augusta, Georgia 30901
(706) 724-4666
mail@davisdesign.org
www.davisdesign.org

GMC
1219 Wayne Street
Columbia, SC 29201
T: 803.766.1235
GMCNETWORK.COM

ISSUE	DATE
BID DOCUMENTS	10.24.19

DRAWN BY: RWD
CHECKED BY: RWD

MILLBROOK ELEMENTARY SCHOOL - ADDITIONS AND RENOVATIONS
255 E PINE LOG RD, AIKEN, SC 29803
GMC # ACOL180004

LANDSCAPE PLANS

L1.2
sheet of 3

4/22/2019 7:56:51 AM

Order Plans @ WWW.LDILine.com