


10/17/2019 9:47:10 AM

Order Plans @

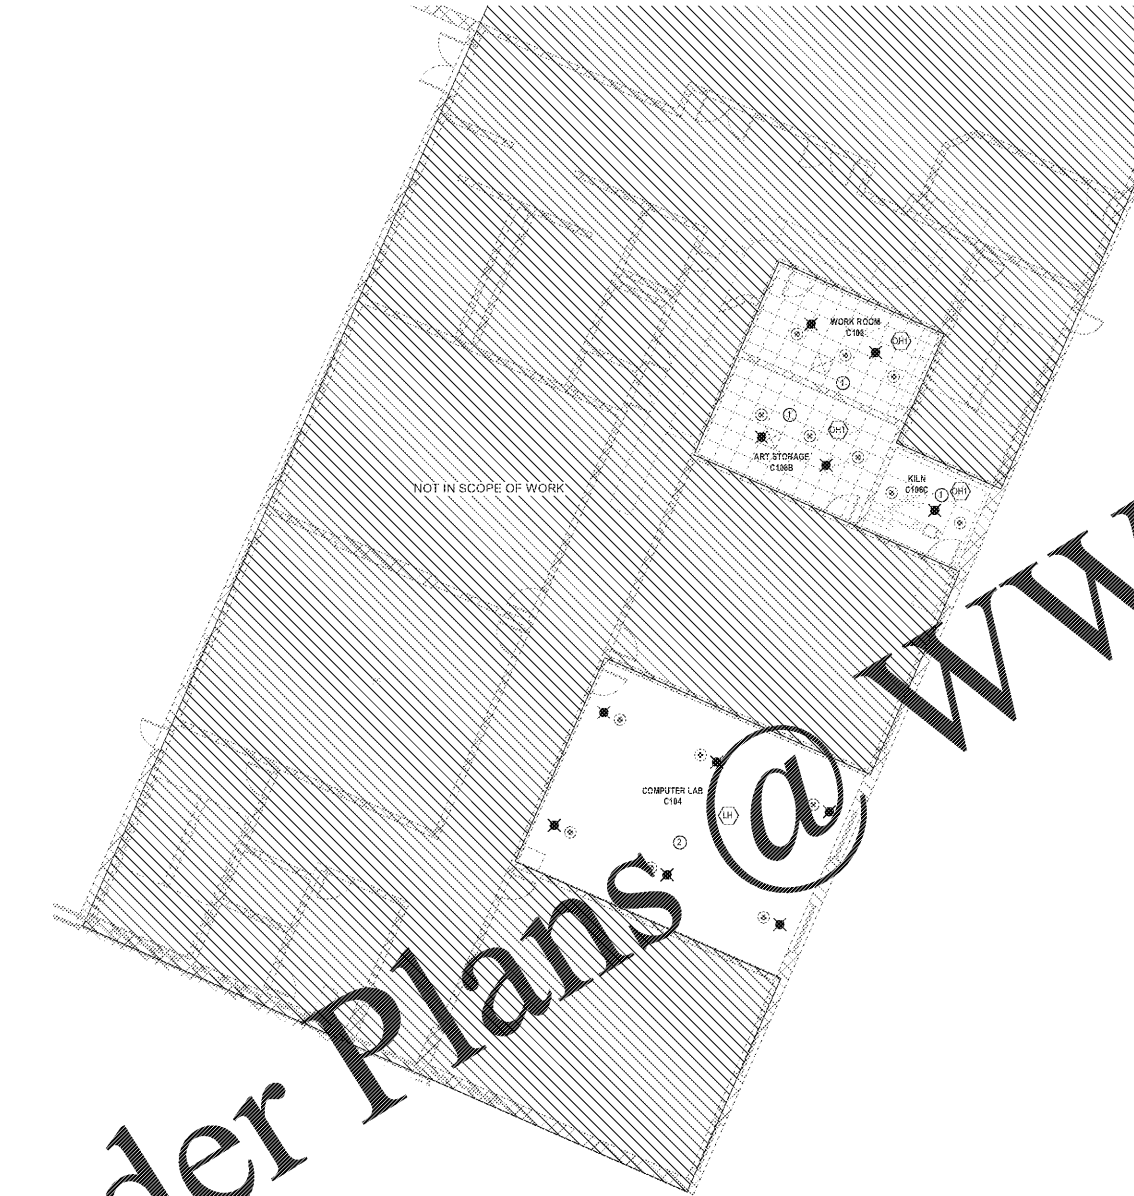



NOTES:

- ① EXISTING SPRINKLERS SHALL BE REMOVED. CONTRACTOR SHALL PROVIDED RECESSED HEADS FOR OH1 OCCUPANCY. COORDINATE WITH OTHER DISCIPLINES. VERIFY CEILING PANEL LOCATION.
- ② EXISTING SPRINKLERS SHALL BE REMOVED AND REPLACED WITH RECESSED 200F PENDENTS PER SPRINKLER LEGEND. COORDINATE WITH OTHER DISCIPLINES. VERIFY CEILING PANEL LOCATION.

FIRE PROTECTION DEMOLITION AND RENOVATION LEGEND			
	NEW	EXISTING TO REMAIN	REMOVE
FIRE LINE	---	---	---
SPRINKLERS	PER SPRINKLER LEGEND		

FIRE PROTECTION DEMOLITION NOTES

- DRAWINGS SHOW GENERAL INTENT OF DEMOLITION. QUANTITIES, LOCATIONS, SIZES AND EQUIPMENT ARE SHOWN TO INDICATE TYPE SYSTEM TO BE REMOVED AND DOES NOT NECESSARILY REPRESENT EXACT CONDITIONS. CONTRACTOR SHALL FIELD VERIFY BEFORE STARTING WORK.
- DEMOLITION OF EQUIPMENT, SYSTEMS AND COMPONENTS SHALL INCLUDE ALL SUPPORTS, PADS, HANGERS, INSULATION, CONTROLS, STARTERS, ACCESSORIES AND APPURTENANCES NOT REQUIRED FOR THE INSTALLATION OF THE NEW SYSTEM.
- WHEN PARTIAL DEMOLITION OF A SYSTEM IS INDICATED, THE PART OF THE SYSTEM SHOWN TO BE REMOVED SHALL BE REMOVED TO THE ACTIVE MAIN OR BRANCH IF NOT REQUIRED FOR THE INSTALLATION OF THE NEW SYSTEM. THE ACTIVE MAIN OR BRANCH SHALL BE REPAIRED TO MATCH THE NEW INSTALLATION AS PRACTICAL.
- PATCHING OF BUILDING STRUCTURES AND FINISHES SHALL PERTAIN TO ALL WALLS, FLOORS, SLABS, ROOFS, STRUCTURES AND FINISHES. PATCHES SHALL MATCH EXISTING STRUCTURE, FIRE RATING AND FINISH.
- ALL OPENINGS CREATED BY THE ABANDONMENT OR REMOVAL OF EXISTING SYSTEMS SHALL BE PATCHED.
- ALL WALLS, ROOFS, SLABS, STRUCTURES AND FINISHES WHOSE FINISH IS IRREGULAR DUE TO THE REMOVAL OF SYSTEMS, SUPPORTS, PADS, ACCESSORIES AND APPURTENANCES SHALL BE PATCHED.
- ALL FINISHES SHALL MATCH EXISTING FINISH. WHEN FINISH OBVIOUSLY DOES NOT MATCH EXISTING FINISH SUCH AS SHADE OF PAINT, AGE OF FINISH, ETC. THE FINISH SHALL BE APPLIED TO THE PATCH AND THE SURFACE IN ALL DIRECTIONS UNTIL A SURFACE CHANGE OF A MINIMUM 45 DEGREE.
- REMOVAL OF SYSTEMS SHALL INCLUDE COMPLETE SYSTEM WHENEVER PRACTICAL. IF NOT, SYSTEM (I.E., PIPE, CONDUIT, ETC.) SHALL BE REMOVED TO 1 INCH BELOW SURFACE.



FIRST LEVEL -
EXISTING WING -
RENOVATION
F1.13

MILLBROOK ELEMENTARY
SCHOOL - ADDITIONS AND
RENOVATIONS
255 E PINE LOG RD, AIKEN, SC
29803
GMC # ACOL180004

ISSUE	DATE
BID DOCUMENTS	10.24.19

Buford & Goff
Engineers & Planners



1219 Wayne
Columbia, SC
T
GMCNETWORK.CO

GMC