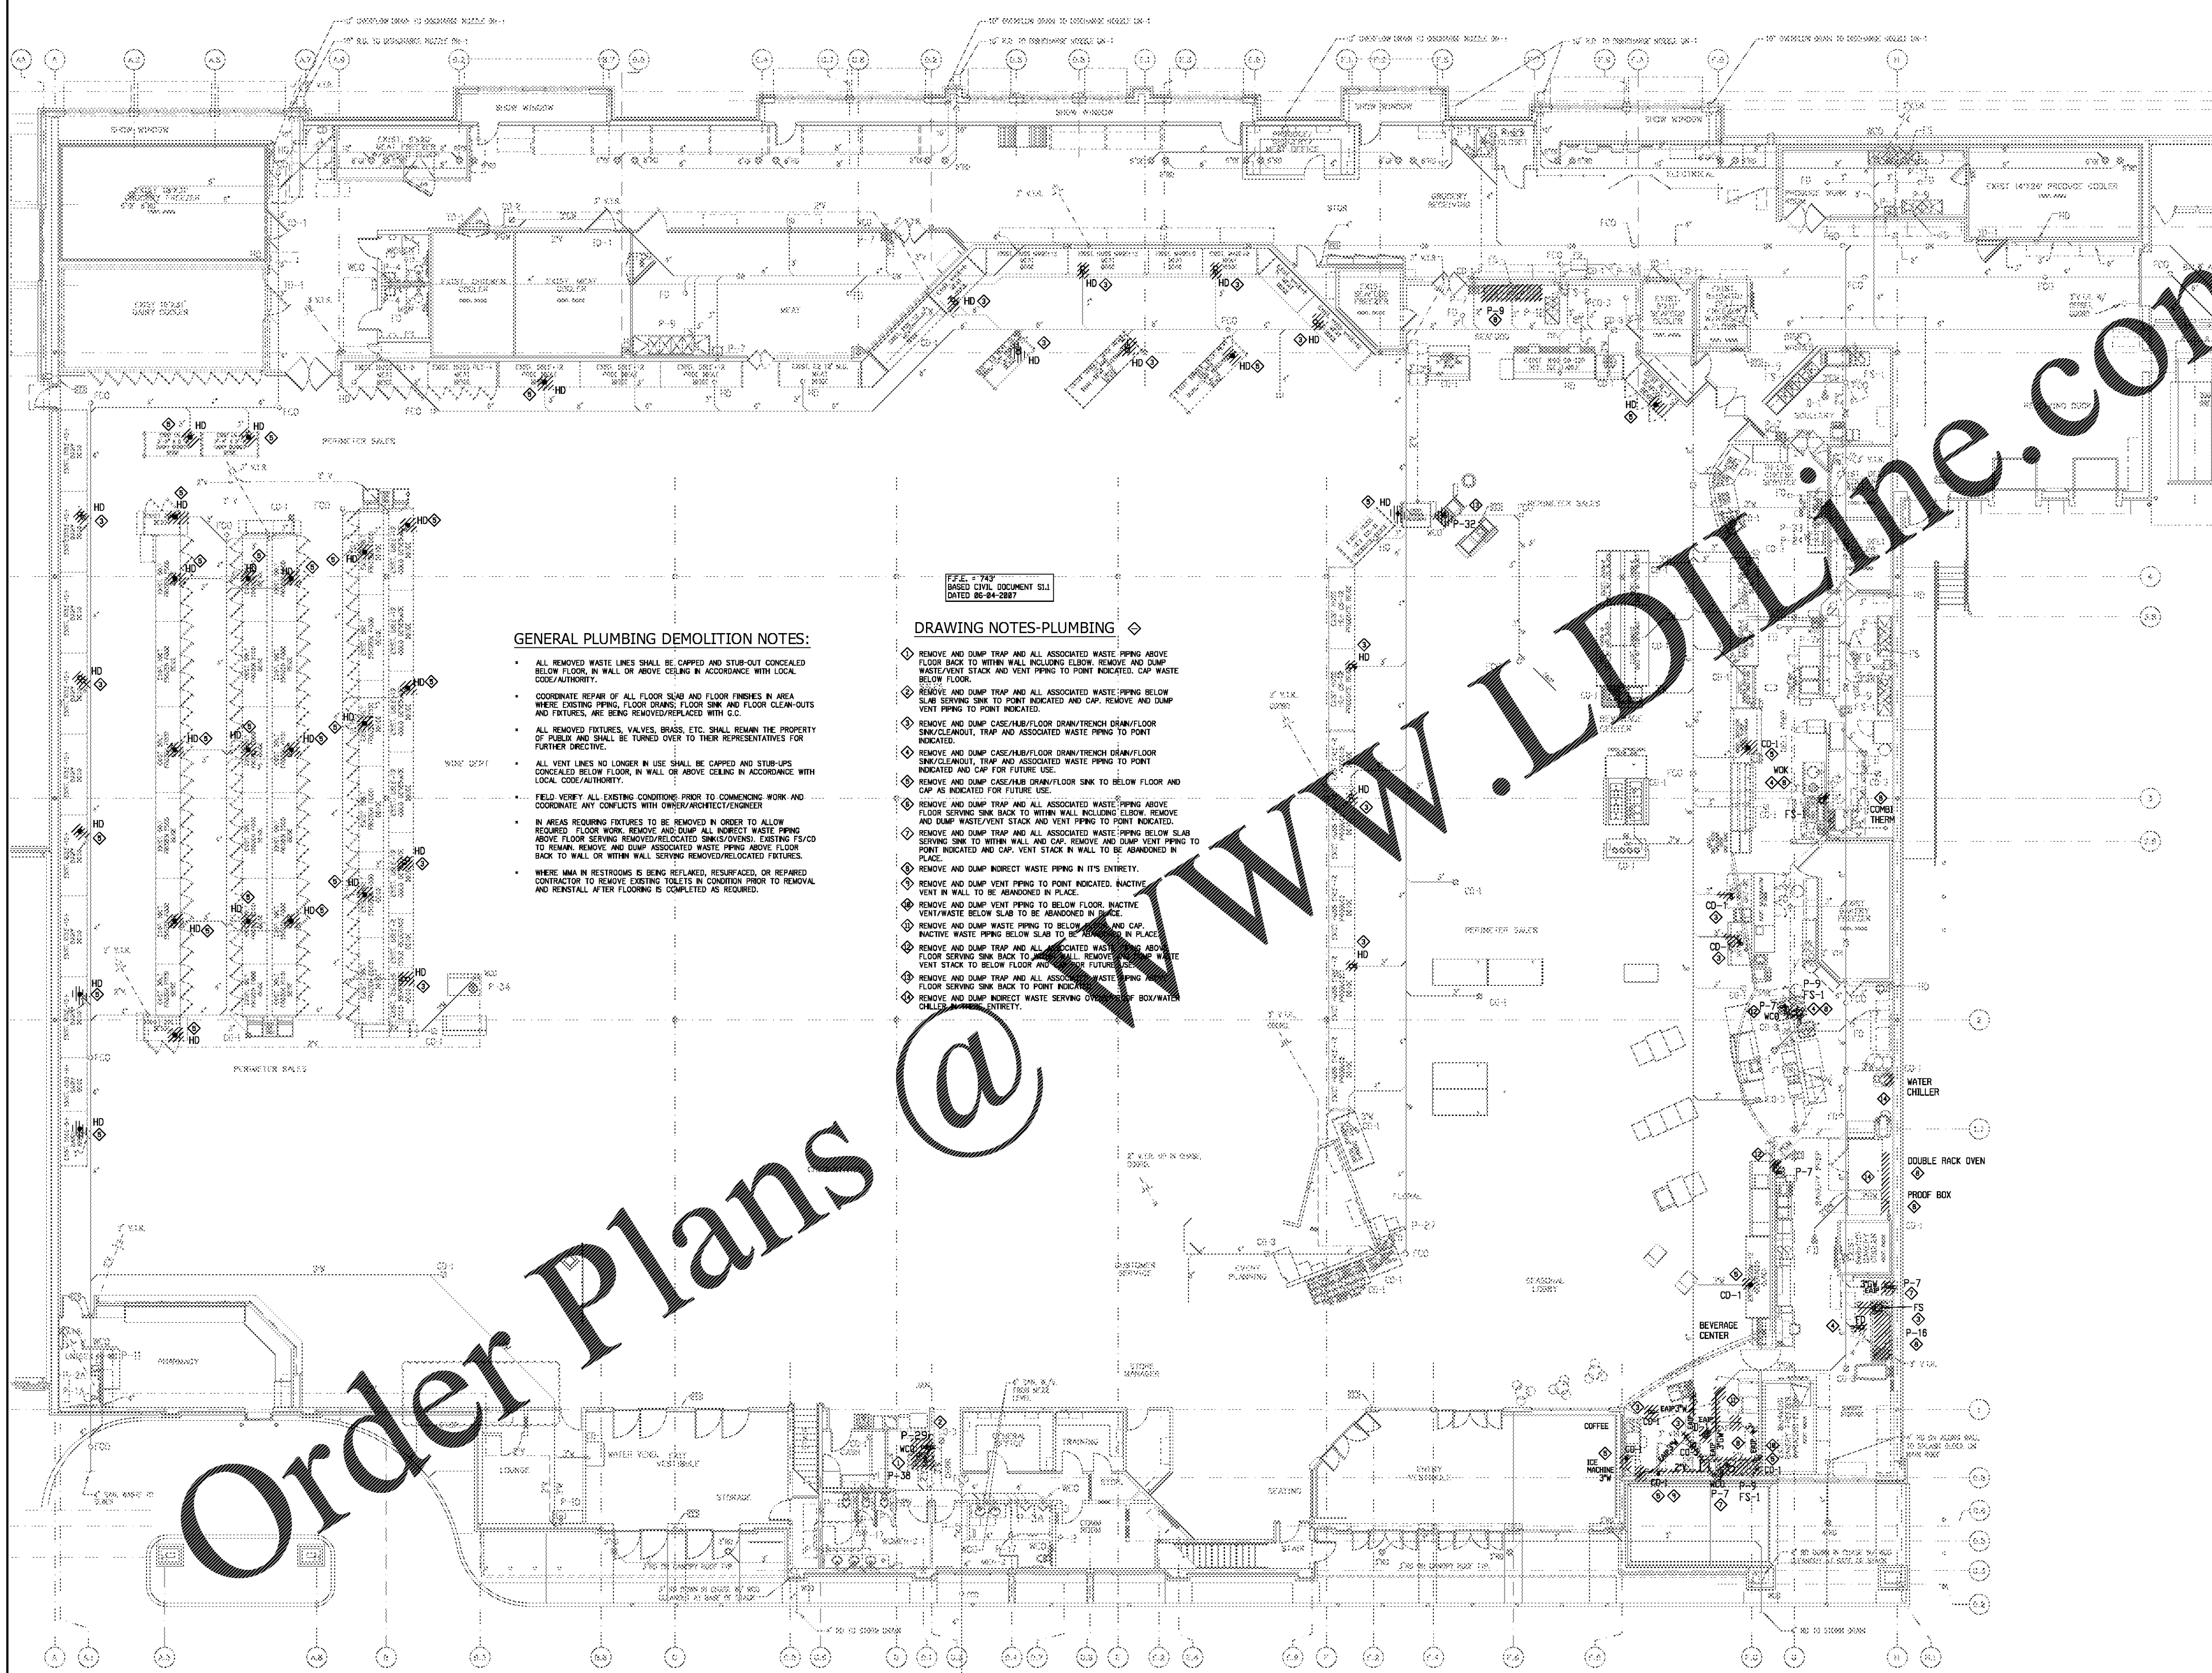

GENERAL PLUMBING DEMOLITION NOTES:

- ALL REMOVED WASTE LINES SHALL BE CAPPED AND STUB-OUT CONCEALED BELOW FLOOR, IN WALL OR ABOVE CEILING IN ACCORDANCE WITH LOCAL CODE/AUTHORITY.
- COORDINATE REPAIR OF ALL FLOOR SLAB AND FLOOR FINISHES IN AREA WHERE EXISTING PIPING, FLOOR DRAINS, FLOOR SINK AND FLOOR CLEAN-OUTS AND FIXTURES, ARE BEING REMOVED/REPLACED WITH G.C.
- ALL REMOVED FIXTURES, VALVES, BRASS, ETC. SHALL REMAIN THE PROPERTY OF PUBLIX AND SHALL BE TURNED OVER TO THEIR REPRESENTATIVES FOR FURTHER DIRECTIVE.
- ALL VENT LINES NO LONGER IN USE SHALL BE CAPPED AND STUB-UPS CONCEALED BELOW FLOOR, IN WALL OR ABOVE CEILING IN ACCORDANCE WITH LOCAL CODE/AUTHORITY.
- FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO COMMENCING WORK AND COORDINATE ANY CONFLICTS WITH OWNER/ARCHITECT/ENGINEER
- IN AREAS REQUIRING FIXTURES TO BE REMOVED IN ORDER TO ALLOW REQUIRED FLOOR WORK. REMOVE AND DUMP ALL INDIRECT WASTE PIPING ABOVE FLOOR SERVING REMOVED/RELOCATED SINK(S/OVENS). EXISTING FS/CD TO REMAIN. REMOVE AND DUMP ASSOCIATED WASTE PIPING ABOVE FLOOR BACK TO WALL OR WITHIN WALL SERVING REMOVED/RELOCATED FIXTURES.
- WHERE MMA IN RESTROOMS IS BEING REFLAKED, RESURFACED, OR REPAIRED CONTRACTOR TO REMOVE EXISTING TOILETS IN CONDITION PRIOR TO REMOVAL AND REINSTALL AFTER FLOORING IS COMPLETED AS REQUIRED.

DRAWING NOTES-PLUMBING

1. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING ABOVE FLOOR BACK TO WITHIN WALL INCLUDING ELBOW. REMOVE AND DUMP WASTE/VENT STACK AND VENT PIPING TO POINT INDICATED. CAP WASTE BELOW FLOOR.
2. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING BELOW SLAB SERVING SINK TO POINT INDICATED AND CAP. REMOVE AND DUMP VENT PIPING TO POINT INDICATED.
3. REMOVE AND DUMP CASE/HUB/FLOOR DRAIN/TRENCH DRAIN/FLOOR SINK/CLEANOUT, TRAP AND ASSOCIATED WASTE PIPING TO POINT INDICATED.
4. REMOVE AND DUMP CASE/HUB/FLOOR DRAIN/TRENCH DRAIN/FLOOR SINK/CLEANOUT, TRAP AND ASSOCIATED WASTE PIPING TO POINT INDICATED AND CAP FOR FUTURE USE.
5. REMOVE AND DUMP CASE/HUB DRAIN/FLOOR SINK TO BELOW FLOOR AND CAP AS INDICATED FOR FUTURE USE.
6. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING ABOVE FLOOR SERVING SINK BACK TO WITHIN WALL INCLUDING ELBOW. REMOVE AND DUMP WASTE/VENT STACK AND VENT PIPING TO POINT INDICATED.
7. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING BELOW SLAB SERVING SINK TO WITHIN WALL AND CAP. REMOVE AND DUMP VENT PIPING TO POINT INDICATED AND CAP. VENT STACK IN WALL TO BE ABANDONED IN PLACE.
8. REMOVE AND DUMP INDIRECT WASTE PIPING IN IT'S ENTIRETY.
9. REMOVE AND DUMP VENT PIPING TO POINT INDICATED. INACTIVE VENT IN WALL TO BE ABANDONED IN PLACE.
10. REMOVE AND DUMP VENT PIPING TO BELOW FLOOR. INACTIVE VENT/WASTE BELOW SLAB TO BE ABANDONED IN PLACE.
11. REMOVE AND DUMP WASTE PIPING TO BELOW FLOOR AND CAP. INACTIVE WASTE PIPING BELOW SLAB TO BE ABANDONED IN PLACE.
12. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING ABOVE FLOOR SERVING SINK BACK TO WITHIN WALL. REMOVE AND DUMP WASTE VENT STACK TO BELOW FLOOR AND CAP FOR FUTURE USE.
13. REMOVE AND DUMP TRAP AND ALL ASSOCIATED WASTE PIPING ABOVE FLOOR SERVING SINK BACK TO POINT INDICATED.
14. REMOVE AND DUMP INDIRECT WASTE SERVING OVEN/PROOF BOX/WATER CHILLER IN THEIR ENTIRETY.

1 / PD2.1 SANITARY WASTE PLUMBING DEMOLITION PLAN

SCALE: 1/8"=1'-0"

Order Plans @ WWW.LDILine.com

NOTE: THIS DOCUMENT MAY HAVE BEEN ELECTRONICALLY TRANSMITTED. IF UNSIGNED, IT CANNOT BE FILED FOR PUBLIC RECORD. PUBLIC RECORD FILINGS REQUIRE SIGNED AND SEALED DOCUMENTS.

LITTLE
DIVERSIFIED ARCHITECTURAL CONSULTING
615 South College Street, Suite 1600 Charlotte, NC 28202
T: 704.525.6350 F: 704.561.8700
www.littleonline.com

This drawing and the design shown are the property of Little Diversified Architectural Consulting. The reproduction, copying or other use of this drawing without their written consent is prohibited and any infringement will be subject to legal action.
© Little 2019

Publix
CORPORATE OFFICES - FACILITIES DESIGN
PHYSICAL ADDRESS:
3300 PUBLIX CORPORATE PKWY, LAKELAND, FL 33811-3311
MAILING ADDRESS:
BOX 407, LAKELAND, FL 33802
(863) 688-7407

BRANDT ENGINEERING, INC.
2840 POLO PARKWAY, SUITE 200
MIDLOTHIAN, VA 23113
PHONE: (804)794-6656
FAX: (804)794-8588
EMAIL: cadd@beiric.com
NC LICENSE NO: C-1504

SEAL 027092
ENGINEER
JOHN S. PARKER
10/24/19

ARCHITECT OF RECORD:
BRIAN T. MORRISON
NORTH CAROLINA REGISTRATION # 5137
STRUCTURAL ENGINEER OF RECORD:
DANIEL P. WRAY
NORTH CAROLINA REGISTRATION # 025879
PLUMBING ENGINEER OF RECORD:
JOHN PARKER
NORTH CAROLINA REGISTRATION # 27092
FIRE PROTECTION ENGINEER OF RECORD:
FADI GHUMRAWI
NORTH CAROLINA REGISTRATION # 039930
MECHANICAL ENGINEER OF RECORD:
JOHN PARKER
NORTH CAROLINA REGISTRATION # 27092
ELECTRICAL ENGINEER OF RECORD:
R. KNOX. STACY
NORTH CAROLINA REGISTRATION # 28549
REFRIGERATION ENGINEER OF RECORD:
ERIC KEVIN ICH
NORTH CAROLINA REGISTRATION # 040897

ISSUE FOR
100% FOR CONSTRUCTION

ISSUE DATE
10/08/2019

REVISIONS

NO.	REASON	DATE

PROJECT TEAM
PRINCIPAL IN CHARGE: John Parker, PE
PROJECT MANAGER: Perry Morrow
DESIGN TEAM: Steve Haraway

PROJECT NAME
PUBLIX 1484 Remodel
MCKEE FARMS
3110 Fincher Farm Rd.
Matthews, NC 28105
(APP)

PROJECT NUMBER
122.11235.00

SHEET TITLE
SANITARY WASTE PLUMBING DEMOLITION PLAN

SHEET NUMBER
PD2.1