INTERIOR FINISH LEGEND:
ALL MATERIALS ARE BASIS OF DESIGN, SEE SPECIFICAITONS FOR APPROVED EQUALS.

FINISH CODE	MANUFACTURER	PRODUCT NAME	PRODUCT NUMBER	COLOR	SIZE/ WIDTH/ FINISH	DESCRIPTION	REMARKS
FLOOR BASE							
B-1	TARKETT/JOHNSONITE	DURACOVE THERMOPLASTIC RUBBER	DC-29, TYPE TP	29 MOON ROCK	4" HIGH, 1/8 GUAGE	RUBBER TOE COVE BASE	-
B-2	TARKETT/JOHNSONITE	MILLWORK RUBBER BASE	MW-29-F6, REVEAL	29 MOON ROCK	6" HIGH	REVEAL PROFILE	MITER ALL CORNERS
B-3	ELITECRETE	FLAKE THIN SYSTEM	TBD	TBD	TBD	6" COVE BASE WITH BACKER STRIP	METAL TOP CAP TR-5
B-4	FLORIDA TILE	SEQUENCE	P43N9/ 34938	DRIFT	3"X24"	BULLNOSE BASE	GR-1
FLOORING							
CPT-1	SHAW CONTRACT GROUP	DIFFUSE TILE	59575	75765 CLIMATE	24" X 24"	INSTALLED IN BRICK PATTERN	
CPT-2	SHAW CONTRACT GROUP	ALL ACCESS | PORTAL	5T035	STERLING 34557	24" X 24"	INSTALLED IN BRICK PATTERN	WALK OFF CARPET TILE
EP-1	ELITECRETE	FLAKE THIN SYSTEM	-	TBD	40 MIL	TEXTURE 3	
LVP-1	EVERSTEP	HERCULES PRO	HER-8504-10	FRENCH ROAST	6.3" X 48" X 4.5 MM	30 MIL WEAR LAYER	
PT-1	FLORIDA TILE	SEQUENCE	FTI3493818X36	DRIFT	18"X36"		VERTICAL ASHLAR PATTERN. GR-1, MODIFIED EPOXY GROUT
PT-2	FLORIDA TILE	SEQUENCE	FTI349389X36	DRIFT	9"X36"		VERTICAL ASHLAR PATTERN. GR-1, MODIFIED EPOXY GROUT
PT-3	FLORIDA TILE	SEQUENCE	FTI34938M4X4HEX	DRIFT	4"X 4" HEXAGON MOSAICS	12" X 12" MESH MOUNTED	GR-1, MODIFIED EPOXY GROUT
RF-1	SIENA	RUBBER FLOORING	SR10101	GRAY MATTER	9MM THICK, 48" W.	ROLLED GOODS	9MM AVAILABLE SPECIAL ORDER, ALLOW LEAD TIME
SC-1	SEALED CONCRETE	-	N/A	-	-		-
SC-2	SEALED CONCRETE	HARDENER/DENSIFIER	N/A	-	-		SALLY PORT/GARAGE
STR-1	TARKETT/JOHNSONITE	ANGLED FIT RUBBER STAIR TREAD	VIBMNTS 29 SQ	29 MOON ROCK	-	BAMBOO PATTERNED	VISUALY IMPAIRED, BLACK GRIT CONTRAST STRIP
VCT-1	ARMSTRONG	STANDARD EXCELON	21933	BLUE CLOUD	12" X 12"	DIAMOND 10 TECH	
WALLS							
APS-1	MBI	MBI COLORSONIX	SERIES 1800F-3060-I	GUILFORD OF MAINE, FR701, TBD	36" A.F.F. TO CEILING	2", W/ SQUARE EDGE, FIBERGLASS CORE	SURFACE - POLYESTER FABRIC, INCOMBUSTIBLE CLASS A
P-1	SHERWIN WILLIAMS	PAINT	SW7019	GAUNTLET GRAY	SEMI-GLOSS	TRIM PAINT, METAL DOORS	
P-2	SHERWIN WILLIAMS	PAINT	SW7029	AGREEABLE GRAY	EG SHEL	STANDARD WALL PAINT	SEE FINISH SCHEDULE FOR EPOXY LOCATIONS
P-3	SHERWIN WILLIAMS	PAINT	SW7024	FUNCTIONAL GRAY	EG SHEL	ACCENT WALL	
P-4	SHERWIN WILLIAMS	PAINT	SW9146	FADED FLAXFLOWER	EG SHEL	ACCENT WALL	
P-5	SHERWIN WILLIAMS	PAINT	SW7007	CEILING BRIGHT WHITE	FLAT	CEILING PAINT	SEE FINISH SCHEDULE FOR EPOXY LOCATIONS CEILING PAINT & SOFFIT TO BE FLAT PAINT FINISH
P-6	SHERWIN WILLIAMS	PAINT	TBD	TBD	FLAT	CEILING PAINT @ LOBBY TOWER	
WT-1	FLORIDA TILE	METAL MOSAIC	MT110/M1x4	STAINLESS STEEL BRICK	-	12"X12" BRICK STACKED MOSAIC	USE SCHLUTER TR-2 TRIM, GR-2. BREAK ROOM BACKSPLASH
WT-2	FLORIDA TILE	SEQUENCE	FTI34938M4X4HEX	DRIFT	4" X 4" HEXAGON MOSAICS	12" X 12" MESH MOUNTED	USE SCHLUTER TR-2 TRIM, GR-1. SINK BACKSPLASH, SEE SHEET A502 FOR LOCATIONS
WT-3	FLORIDA TILE	STREAMLINE	FTI310	ARTIC WHITE	4" X 16"	GLOSS / MATTE	VERTICAL STACKED BOND PATTERN. GR-3, @ SHOWERS
SURFACES							
PL-1	WILSONART	PLASTIC LAMINATE	STANDARD FINISH LAMINATE	4943-38	CLASSIC LINEN	COUNTER TOPS	SEE INTERIOR FINISH SCHEDULE AND ELEVATIONS
PL-2	WILSONART	PLASTIC LAMINATE	SOFT GRAIN LAMINATE	7933K-12 - AEON SURFACE	CAFELLE	CABINET VERTICAL SURFACES	SEE INTERIOR FINISH SCHEDULE AND ELEVATIONS
QTZ-1	SILESTONE	3CM QUARTZ COUNTERTOP	-	ROUGUI / LENA	-	COUNTER TOPS, KITCHEN/BREAK/TRANSACTION	SEE INTERIOR FINISH SCHEDULE AND ELEVATIONS
QTZ-2	SILESTONE	3CM QUARTZ COUNTERTOP	-	MEROPE SUEDE	-	COUNTER TOPS, BATHROOMS	SEE INTERIOR FINISH SCHEDULE AND ELEVATIONS
SS-1	FORMICA	SOLID SURFACE	781	LUNA CONCRETE	-	WINDOW SILLS, 1/2 TOP CAP	
SST-1	CONTRACTORS CHOICE	304 STAINLESS STEEL	N/A	GRAIN FINISH	16 GUAGE		
MISCELLANEOUS							
DPRY-1	EYKON	SOURCE ONE	HALO	CHA-02 VAPOR	72" WIDTH	DAYBREAK W/ MESH TOP, 12 GROMMETS	DECORATIVE FRONT & VINYL BACK SHOWER CURTAIN
CG-1	CS ACROVYN	RECESSED CORNER GUARD	4000 SERIES, SFS-20N	262 DRIFTWOOD	2", RECESSED	4'	MATCHING P-2
CG-2	CS ACROVYN	SURFACE-MOUNT CORNER GUARD	SSM-20N	262 DRIFTWOOD	2", SURFACE	4'	MATCHING P-2
CR-1	TARKETT/JOHNSONITE	CHAIR RAIL	CHR-29-C	29 MOONROCK	4", APPLIED	MOUNTED AT 36" A.F.F.	MATCHING P-2
D-1	MASONITE/ASPIRO	PRE-FINISHED WD VENEER	WHITE OAK, PLAIN SLICED	COCOA BEAN	-	-	-
FRP-1	SEQUENTIA STRUCTOGLAS	SANDSTONE	1130	COTTON WHITE	.09"	SANITARY WALL FINISH	CLASS B RATING REQUIRED
GR-1	TEC	INCOLOR	933	STANDARD GRAY	PRE-MIXED	HIGH PERFORMANCE GROUT	
GR-2	TEC	INCOLOR	922	LIGHT PEWTER	PRE-MIXED	HIGH PERFORMANCE GROUT	
GR-3	TEC	INCOLOR	910	BRIGHT WHITE	PRE-MIXED	HIGH PERFORMANCE GROUT	-
LCK-1	SPACESAVER	FREESTYLE	SINGLE TIER	BLACK	-	METAL LOCKERS	PERSONAL LOCKERS, LOCKER ROOMS
LCK-2	TIFFIN	SENTINEL	PASS-THRU	BLACK	-	METAL LOCKERS	EVIDENCE LOCKERS
LCK-3	TIFFIN	SENTINEL	4 COMP. RECESSED	BLACK	-	METAL LOCKERS	HANDGUN LOCKERS, LOCATE IN SALLY PORT
TP-1	SCRANTON	HDPE TOILET PARTITION	HINEY HIDERS	SHALE	ORANGE PEEL	TOILET PARTITIONS	
TR-1	SCHLUTER	SCHIENE	-	ANNODIZED ALUMINUM	-	TRANSITION STRIP	TRANSITION FROM CARPET TO TILE/TOP OF EPOXY BASE
TR-2	SCHLUTER	JOLLY	-	ANNODIZED ALUMINUM	-	FINISHING EDGE	TRANSITION AT WALL TILE
TR-3	SCHLUTER	DILEX-AHK	-	ANNODIZED ALUMINUM	-	COVE BASE	TRANSITION AT WALL & FLOOR TILE
TR-4	TARKETT	EDGE GUARD	EG-29-H	MOON ROCK	-		CARPET TO CONCRETE
TR-5	SCHLUTER	SCHIENE	-	ANNODIZED ALUMINUM	-	COVE CAP	TRANSITION AT INTEGRAL COVE BASE
TR-6	TARKETT/JOHNSONTE	SLIM LINE TRANSITION	SLT-29-F	MOON ROCK			CARPET TO RESILIENT/RUBBER SPORTS FLOOR
TR-7	TREDSAFE	METAL TRANSITION	DT031	NATURAL SATIN	-		CARPET TO EP-1
N-1	TARKETT/JOHNSONTE	STAIR NOSING	RCN-29-A	MOON ROCK	-		NOSING @ HC LIFT EDGE
WS-1	SWF CONTRACT - GRABER	2" FAUX WOOD BLINDS	5630	COCONUT			
WC-1	GOLDCREST	WALL CARPET	[illegible]	[illegible]			BELOW CHAIR RAIL @ FITNESS ROOM

ROOM FINISH SCHEDULE

RM NO	ROOM NAME	FLOOR FINISH	BASE FINISH	DOOR FRAMES MISC. TRIM	DOOR	WALLS: STAND. WALLS	WALLS: ACCENT WALL	CHAIR RAIL: ABOVE	CHAIR RAIL: BELOW	MILLWORK: COUNTER TOP	CABINET: FRONT	CABINET: BASE	COMMENTS	RM NO
10	EXTERIOR STORAGE	SC-1	B-1	P-1	-	P-2								10
11	FITNESS ROOM	RF-1	B-1	P-1	D-1	P-2	P-3/WC-1						SS-1 @ WINDOW SILL. WC-1 BELOW CHAIR RAIL	11
12	CORRIDOR	CPT-1/CPT-2	B-1	P-1	D-1	P-2							STR-1 @STAIRS, N-1 @ LIFT	12
13	BREAK ROOM	LVP-1	B-1	P-1	-	P-2	P-4			QTZ-1	PL-2	PL-2	SS-1 @ WINDOW SILL	13
14	STORAGE	VCT-1	B-1	P-1	D-1	P-2								14
15	VESTIBULE	PT-1	B-4	P-1	D-1	P-4								15
16	STORAGE	VCT-1	B-1	P-1	D-1	P-2								16
17	STORAGE	VCT-1	B-1	P-1	D-1	P-2								17
18	VENDING	LVP-1	B-1	-	-	P-2								18
19	STORAGE	VCT-1	B-1	P-1	-	P-2								19
20	SHOWER	PT-2/PT-3	B-4	P-1	-	P-4	WT-3						EPOXY PAINT FINISH	20
21	MEN'S TOILET	PT-1	B-4	P-1	-	P-4				QTZ-2			EPOXY PAINT FINISH	21
22	STORAGE	PT-1	B-1	P-1	D-1	P-2								22
23	ARMORY	VCT-1	B-3	P-1	-	P-2								23
24	STORAGE	VCT-1	B-1	P-1	-	P-2								24
25	SHOWER	PT-2/PT-3	B-4	-	-	P-4	WT-3						EPOXY PAINT FINISH	25
26	SHOWER	PT-2/PT-3	B-4	-	-	P-4	WT-3						EPOXY PAINT FINISH	26
27	MEN'S LOCKER	PT-1	B-4	P-1	D-1	P-3							EPOXY PAINT FINISH	27
28	WOMEN'S LOCKER	PT-1	B-4	P-1	D-1	P-3							LCK-1, EPOXY PAINT FINISH	28
29	MEN'S LOCKER	PT-1	B-4	P-1	D-1	P-3							LCK-1, EPOXY PAINT FINISH	29
30	PRIVATE ROOM	CPT-1	B-1	P-1	D-1	P-4				PL-1	PL-2	PL-2	SS-1 @ WINDOW SILL	30
31	JANITOR	VCT-1	B-1	P-1	D-1	P-2								[illegible]
32	VESTIBULE	PT-1	B-4	P-1	D-1	P-4								32
33	SHOWER	PT-2/PT-3	B-4	-	-	P-4							EPOXY PAINT FINISH	33
34	WOMEN'S TOILET	PT-1	B-4	P-1	D-1	P-4				QTZ-2			EPOXY PAINT FINISH	34
35	SHOWER	PT-2/PT-3	B-4	-	-	P-4	WT-3						EPOXY PAINT FINISH	35
36	VESTIBULE	PT-1	B-4	P-1	D-1	P-4								36
37	LONG TERM RECORDS STORAGE	VCT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	37
38	SRT STORAGE	VCT-1	B-1	P-1	-	P-2							SS-1 @ WINDOW SILL	38
39	VIDEO WORKSTATION	CPT-1	B-1	P-1	D-1	P-2								39
40	STAIR	-	-	-	-	-								40
100	VESTIBULE	CPT-2	B-2			P-2							SS-1 @ WINDOW SILL	100
101	LOBBY	CPT-1	B-2	P-1	D-1	P-2								101
102	TRAINING/ COMMUNITY ROOM	CPT-1	B-2	P-1	D-1	P-2	P-3			PL-1	PL-2	PL-2	SS-1 @ WINDOW SILL	102
103	MULTIPURPOSE STORAGE	CPT-1	B-1	P-1	D-1	P-2								103
104	MECHANICAL	SC-1	B-1	P-1	-	P-2								104
105	RECORDS/ DISPATCH	CPT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	105
106	TOILET	PT-2	B-4	P-1	D-1	P-4	WT-3						EPOXY PAINT FINISH	106
107	TOILET	PT-2	B-4	P-1	D-1	P-4	WT-3						EPOXY PAINT FINISH	107
108	SHORT-TERM RECORDS	CPT-1	B-1	P-1	D-1	P-2								108
109	FUTURE OFFICE	CPT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	109
110	DEPUTY CHIEF	CPT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	110
111	CLOSET	CPT-1	B-1	P-1	D-1	P-2								111
112	CLOSET	CPT-1	B-1	P-1	D-1	P-2								112
113	CHIEF	CPT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	113
114	VESTIBULE	CPT-2	B-1	P-1	D-1	P-2								114
115	INVESTIGATIONS CAPTAIN	CPT-1	B-1	P-1	D-1	P-2							SS-1 @ WINDOW SILL	115
116	CLOSET	CPT-1	B-1	P-1	D-1	P-2								116
117	CLOSET	CPT-1	B-1	P-1	D-1	P-2								117
118	PATROL CAPTAIN	CPT-1	B-1	P-1	D-1	P-2								118
119	CONFERENCE	CPT-1	B-1	P-1	D-1	P-2	[illegible]							119
120	WORK/ BREAK ALCOVE	LVP-1	B-1	P-1	D-1	P-4	[illegible]			QTZ-1	PL-2	PL-2		120
121	STORAGE	CPT-1	B-1	P-1	D-1	[illegible]								121
122	MECHANICAL	SC-1	B-1	P-1	D-1	[illegible]								122
123	SOFT INTERVIEW	CPT-1	B-1	[illegible]	D-1	[illegible]								123
124	MEN	PT-1	B-4	P-1	D-1	P-4	WT-2/WT-3			QTZ-2			EPOXY PAINT FINISH	124
125	IT	SC-1	B-1	P-1	D-1	P-2								125
126	WOMEN	PT-1	B-4	P-1	D-1	P-4	WT-2/WT-3			QTZ-2			EPOXY PAINT FINISH	126
127	PATROL BULL PEN/ ROLL CALL	CPT-1	[illegible]	P-1	D-1	P-2	P-3							127
128	SERGEANTS/ LIEUTENANTS BULL PEN	CPT-1	[illegible]	P-1	D-1	P-2	P-3							128
129	DETECTIVES BULL PEN	[illegible]	B-1	P-1	[illegible]	P-2	P-3							129
130	VESTIBULE	CPT-2	B-1	P-1	D-1	P-2								130
131	DRUG STORAGE	SC-1	B-3	P-1	-	P-2							EPOXY PAINT FINISH	131
132	GENERAL EVIDENCE STORAGE	SC-1	[illegible]	P-1	-	P-2								132
133	GUN STORAGE	[illegible]	[illegible]	P-1	-	P-2								133
134	MECHANICAL	[illegible]	B-1	P-1	-	P-2								134
135	CASH STORAGE	SC-1	B-3	P-1	-	P-2								135
136	EVIDENCE LOCKERS	EP-1	B-3	P-1	-	P-2				PL-1	PL-2	PL-2	EPOXY PAINT FINISH	136
137	EVIDENCE [illegible]	EP-1	B-3	P-1	-	P-2				PL-1/SST-1	PL-2	PL-2	LCK-2, SST-1 @ ISLAND	137
138	GARAGE EVIDENCE INTAKE	SC-2	B-1	P-1	-	P-2								138
139	SALLY PORT	SC-2	B-1	P-1	-	P-2							LCK-3	139
140	INTERVIEW 1	CPT-1	B-1	P-1	-	P-2							APS-1	140
141	PROCESSING/ INTAKE	EP-1	B-3	P-1	-	P-2				PL-1	PL-2	PL-2	EPOXY PAINT FINISH	141
142	HOLDING	EP-1	B-3	P-1	-	P-2							EPOXY PAINT FINISH	142
143	TOILET	EP-1	B-3	P-1	-	P-2							EPOXY PAINT FINISH	143
144	HOLDING	EP-1	B-3	P-1	-	P-2							EPOXY PAINT FINISH	144
145	VESTIBULE	CPT-1/CPT-2	B-1	P-1	D-1	P-2							EPOXY PAINT FINISH	145
146	MECHANICAL	SC-1	B-1	-	-	P-2								146
147	ELECTRICAL	SC-1	B-1	P-1	-	P-2								147
148	INTERVIEW 2	CPT-1	B-1	P-1	-	P-2							APS-1	148
149	CORRIDOR	CPT-1	B-1	P-1	D-1	P-2							CR-1	149
150	CORRIDOR	CPT-1	B-1	P-1	D-1	P-2							CR-1	150
151	SPRINLKER ROOM	SC-1	B-1	-	-	P-2								151



TR-4 CARPET EDGE GUARD



TR-6 CARPET TO LVP/VCT/RF TRANSITION



TR-7 CARPET EDGE GUARD



N-1 RUBBER NOSING @ WHEELCHAIR LIFT/STAIRS



TR-1 HARD TILE EDGE TO CARPET TRANSITION



TR-2/TR-5 CAPPED TOP HORIZONTAL OR VERTICAL TILE EDGE

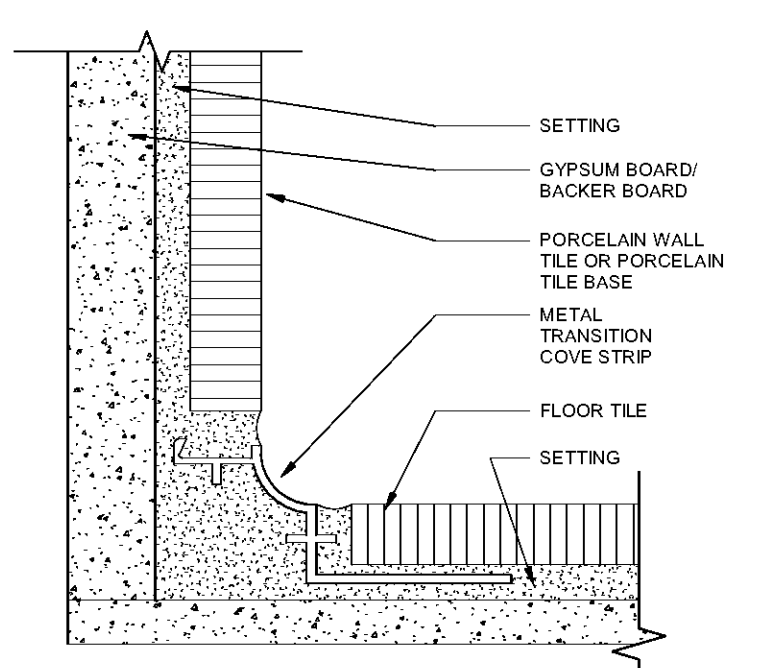

TR-3 COVE TRANSITION FROM HORIZONTAL TO VERTICAL TILE INSTALLATION



CR-1 CHAIR RAIL

INTERIOR FINISH GENERAL NOTES

1. TBD = TO BE DETERMINED.
2. REFER TO INTERIOR SECTIONS, ELEVATIONS, DETAILS AND REFLECTED CEILING PLAN FOR COORDINATION AND ADDITIONAL INFORMATION (SEE COVER INDEX AND/OR SHEET SERIES).
3. ALL INTERIOR FINISHES SHALL COMPLY WITH NCSBC CHAPTER 8, TABLE 803.11, AND CHAPTER 12, SECTION 1210.2, 1210.2.1 THROUGH 1210.2.4.
4. VERIFY LOCATION OF CONTROL JOINTS IN ROOMS RECEIVING TILE FLOORS. SEE WRITTEN SPECIFICATIONS.
5. VERIFY AND COORDINATE FINISHES ON SCHEDULE WITH MILLORK DETAILS.
6. INTERIOR FINISHES COMPLY WITH NCSBC TABLE 803.11.
   A. INTERIOR EXIT STAIRWAYS, RAMPS AND EXIT PASSAGEWAYS: CLASS B
   B. CORRIDORS & EXIT ACCESS FOR EXT. ACCESS: CLASS C
   C. WALL TEXTILES: CLASS A FLAME SPREAD
7. INTERIOR FLOOR FINISHES COMPLY WITH NCSBC SECTION 804., 804.2 THROUGH 804.4.2.
   A. EXIT ENCLOSURES, EXIT PASSAGEWAYS, AND CORRIDORS: CLASS II
8. INTERIOR WALL & CEILING FINISHES SHALL COMPLY WITH NCSBC SECTION 803

INTERIOR FINISH CODES

APS	ACOUSTICAL PANEL SYSTEM	QTZ	QUARTZ
B	WALL BASE	QT	QUARRY TILE
BL	BLINDS	RF	RUBBER FLOOR
CG	CORNER GAURD	RP	RESIN PANEL
CPT	CARPET, MODULAR TILE OR BROADLOOM	SC	SEALED CONCRETE
CR	CHAIR RAIL	SS	SOLID SURFACE MATERIAL
CSM	CAST STONE MASONRY	SST	STAINLESS STEEL
D	DOOR	ST	STAIN
DRPY	DRAPERY	STC	STAINED CONCRETE
EL	ELEVATOR FINISHES	STR	STAIR TREAD
EPF	EPOXY FLOORING	TP	TOILET PARTITION
FRP	FIBERGLASS PANEL	TR	TRANSITION (FLOOR/WALL)
FT	FILM TINT	VCT	VINYL COMPOSITION TILE
GL	GLASS	VET	VINLY ENHANCED TILE
GR	GROUT	VSF	VINYL SHEET FLOOR
HR	HAND RAIL	VWC	VINLY WALLCOVERING
LCK	LOCKERS	WD	WOOD PANELING
LVT	LUXURY VINYL TILE	WG	WALL GUARD
MT	MARMOLEUM TILE	WM	WALK-OFF MAT
N	NOSING	WP	WALL PROTECTION
OFOI	OWNER FURNISHED OWNER INSTALLED	WS	WINDOW SHADE
P	PAINT	WT	WALL TILE
PL	PLASTIC LAMINATE		
PT	PORCELAIN TILE		

adwarchitects
environments for life
architecture planning interiors
2815 COLISEUM CENTRE DRIVE
SUITE 500
CHARLOTTE, NORTH CAROLINA 28217
P704.379.1919
F704.379.1920
www.adwarchitects.com

A NEW POLICE FACILITY FOR

ABERDEEN POLICE DEPARTMENT

804 N. Sandhills Blvd.
Aberdeen, NC 28315

FINISHES (SCHEDULES, PLANS, ELEV, ETC.)

DATE: 11-22-2019
PROJECT NO: 18062

REVISIONS
NO: DATE: DESCRIPTION:

THIS DRAWING IS THE PROPERTY OF ADW ARCHITECTS, P.A. AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR PART. IT SHALL NOT BE USED ON ANY OTHER PROJECT OR GIVEN TO ANY OTHER COMPANY OR AGENCY WITHOUT THE CONSENT OF ADW ARCHITECTS, P.A.

SHEET NUMBER
A700

Order Plans @ WWW.LDILine.com