FINISH KEY

REF SPECIFICATIONS FOR EXACT COLORS REQUIRED

MARK	FINISH	COLOR	DESCRIPTION
ACT1	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACT2	ACOUSTICAL CEILING TILE	WHITE	24"x48" VINYL FACED NON-PERFORATED
ACT3	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACT4	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACTG	ACOUSTICAL CEILING GRID	WHITE	
B4	RESILIENT BASE	BLACK	4"
B6	PLASTIC BASE	BLACK	6"x1/4"
B9	PLASTIC BASE	BLACK	4"x1/4"
B10	PLASTIC BASE OUTSIDE CORNER	BLACK	
C1	CUSHION BACK TILE CARPET		
C3	CUSHION BACK TILE CARPET	CHARCOAL	
CC	CONCRETE CURB		
CT2	ENTRY TILE	RED	12" x 24" x 3/8"
CT9	ACCENT TILE	ADOBE SUNSET	
CT13	PORCELAIN FLOOR TILE	BROWN	
CT18	SANITARY FLOOR MOLDING	SUNSET	
CT19	PORCELAIN WALL TILE	IVORY	5"
CT43	PORCELAIN WALL TILE	BEIGE	12" x 12" x 3/8"
CT44	PORCELAIN FLOOR TILE	GRAY	12" x 12" x 3/8"
CT45	WALL TILE	WHITE	4" x 8" x 3/8"
CT46	PORCELAIN WALL TILE	GREEN	4" x 8" x 3/8"
CT47	WALL TILE	BLUE	4" x 8" x 3/8"
CT48	FLOOR TILE	TAUPE GRADIENT	12" x 24" x 3/8"
CT48A	COVE BASE	TAUPE GRADIENT	6" x 12" x 3/8"
DB5	DURA-TUFF BASE	BLACK	5"
DB10	DURA-TUFF BASE	BLACK	10"
EC	EXPOSED CONCRETE	CLEAR SEALER	
ETR	EXISTING TO REMAIN		
FRP1	FIBERGLASS REINFORCED PLASTIC	WHITE	FRP WALL PANEL
FRP2	FIBERGLASS REINFORCED PLASTIC	BEIGE	FRP WALL PANEL
FRP5	FIBERGLASS REINFORCED PLASTIC	ALMOND	FRP WALL PANEL
FT1	FAUX SUBWAY TILE	WHITE	
G1	GROUT	DARK GRAY	
G2	GROUT	DARK GRAY	
G3	GROUT	LIGHT TAN	
G4	GROUT	GRAY	
G7	GROUT	BROWN	
G9	GROUT	LT GRAY	
G13	GROUT	BEIGE	
HRC1	HEAT RESISTANT COATING	TO MATCH COPPER BROWN BY BERRIDGE	
HRC4	HEAT RESISTANT COATING	MATCH SW#7019 "GAUNTLET GRAY"	
ICC	INTEGRAL COLORED CONCRETE	BROWN	
LVT1	PLANK FLOORING	DARK WOODGRAIN	
P3	PAINT	"LOYAL BLUE" #6510	
P5	PAINT	"SAFETY YELLOW" OSHA STANDARD	
P5E	PAINT	SAFETY YELLOW	
P8	PAINT	"PURE WHITE" # 7005	
P14	PAINT	"GOLDENROD" # 6677	
P15	PAINT	"SUMMIT GRAY" #7669	
P15E	PAINT	GRAY	
P16	PAINT	"SOFTWARE" #7074	
P21	PAINT	"SAFETY RED" #4081	
P21E	PAINT	SAFETY RED	
P33	PAINT	"DOVER WHITE" #6385	
P33E	PAINT	CREAM	
P36	PAINT	"DOMINO" #6989	
P36E	PAINT	BLACK	
P40	PAINT	"GARDENIA" #6665	
P49	PAINT	"GAUNTLET GRAY" #7019	
P49E	PAINT	DARK GRAY	
P57	PAINT	"ROYCROFT PEWTER" #2848	
P59	PAINT	"CLASSIC FRENCH GRAY" #0077	
P76	PAINT	"WALMART BLUE" #076	
P76U	PAINT	WALMART BLUE (URETHANE-LIKE)	
P81	PAINT	"TRICORN BLACK" #6258	
P81E	PAINT	BLACK	
P83	PAINT	"COBBLE BROWN" #6082	
P93	PAINT	"TAMARIND" #7538	
P94	PAINT	"EXTERIOR DROMEDARY CAMEL" #7694 (EXT)	
P94E	PAINT	TAN	
P100	PAINT	"NOTABLE HUE" #6521	
P101	PAINT	"GUSTO GOLD" #6904	
P102	PAINT	"BEACH HOUSE" #7518	
P107	PAINT	"STRAW HARVEST" #7698	
P112	PAINT	"BUTTERFIELD" #6676	
P124	PAINT	"MEADOWLARK" #7522	
P124E	PAINT	LIGHT BROWN	
P126	PAINT	"KNOCKOUT ORANGE" #6885	
P126U	PAINT	PICKUP ORANGE (URETHANE-LIKE)	
P130	PAINT	"OUTRAGEOUS GREEN" #6922	
P130U	PAINT	MARKET GREEN (URETHANE-LIKE)	
P131	PAINT	"WHITE FLOUR" #7102	
P134	PAINT	"REPOSE GRAY" #7015	
P134E	PAINT	LIGHT GRAY	
P135	PAINT	"DORIAN GRAY" #7017	
P135E	PAINT	MEDIUM GRAY	
P139	PAINT	"MELANGE GREEN" #6710	
P140	PAINT	"SNOWBOUND" #7004	
P140E	PAINT	WHITE	
P152	PAINT	NM BRAND GREEN - PANTONE 366C	
P159	PAINT	"CASA BLANCA" #7571	
P162	PAINT	"PEPPERCORN" #7674	
P163	PAINT	"TURQUISH" #6939	
P164	PAINT	"ESSENTIAL GRAY" #6002	
P166	PAINT	"MARINER" #6766	
P204	PAINT	"FESTOON AQUA" #0019	
PF4	LEAD-COTE	METALLIC	
PL3	PLASTIC LAMINATE	ORGANIC COTTON	
PL4	PLASTIC LAMINATE	MAPLE	
PL6	PLASTIC LAMINATE	LIGHT TAN	
PL11	PLASTIC LAMINATE	NORTH SEA GRAY	
PL12	PLASTIC LAMINATE	MYSTED ZEPHYR	
PL15	PLASTIC LAMINATE	BROWN	
PL20	PLASTIC LAMINATE	TAN	
PL22	PLASTIC LAMINATE	DEEPSTAR AGATE	
PL27	PLASTIC LAMINATE	GREEN	
PL28	PLASTIC LAMINATE	ALOE	
PL30	PLASTIC LAMINATE	"STEEL MESH" WILSONART 4879	
PL31	PLASTIC LAMINATE	"GREY" WILSONART 1500-60	
PL32	PLASTIC LAMINATE	"VISION VAVA" NEVAMAR VA2002	
PS1	PROTECTIVE SURFACE	WALMART MED BLUE IMPACT SPECIALTIES	
PS3	PROTECTIVE SURFACE	BRUSHED SURFACING	
PS4	PROTECTIVE SURFACE	"GLOWING EMBER" IMPACT SPECIALTIES	
PS5	PROTECTIVE SURFACE	"FRESH LINEN" IMPACT SPEICALTIES	
PS6	PROTECTIVE SURFACE	YELLOW	
PS7	PROTECTIVE SURFACE	"GRAY PATTERN"	
PVC1	PVC PLANK FLOORING	WOODGRAIN	
QT3	QUARRY TILE	GRAY	6"x6" ABRASIVE
QT31	QUARRY TILE	RED	6"x6" ABRASIVE
RCS1	RECYCLED CERAMIC SOLID SURFACE	GRENITE "BIRCH PRADA"	
RF1	RESINOUS FLOOR	GRAY	
RF2	RESINOUS FLOOR	RED	
RRF1	RECYCLED RUBBER FLOORING	BLACK/BLUE	
RRF2	RECYCLED RUBBER FLOORING	BLACK/GREEN	
SCB1	SANITARY COVE BASE	RED	6" H ANTIMICROBIAL PLASTIC FOR QT
SCB2	SANITARY COVE BASE	GRAY	8" H ANTIMICROBIAL PLASTIC FOR QT
SCB4	SANITARY COVE BASE	RED	8" H ANTIMICROBIAL PLASTIC
SCB5	SANITARY COVE BASE	GRAY	[illegible] H ANTIMICROBIAL PLASTIC
SCB6	SANITARY COVE BASE	TAN	
SS	STAINLESS STEEL		
SST1	SOLID SURFACE		
TC	TEXTURED CONCRETE		
TS1	ALUMINUM TRANSITION STRIP		
VCT9	VINYL COMPOSITION TILE	WHITE	12"x12"x1/8"
VCT11	VINYL COMPOSITION TILE	BEIGE	12"x12"x1/8"
VCT12	VINYL COMPOSITION TILE	TAN	12"x12"x1/8"
WB	2x8 WOOD BASE		
WB10	2x10 WOOD BASE		
WG	PLASTIC WALL GUARD	BLACK OR GRAY	

CEILING ALLOWANCE SCHEDULE SC

	CEILING TILE REPLACEMENT AREAS	QUANTITY OF TILES
NON SALES AREA (NTD: EDIT AS REQUIRED PER PROJECT)	OFFICES (171 UPC INVOICING, 172 TRAINING, 175 MANAGEMENT) AND 164, 919 ALCOVES	10
	105 COURTESY DESK, 106 RETURN STORAGE	8
	VISION CENTER (700 OPTICAL SALES, 701 ADJUSTMENTS, 702 CONTACTS, 703 PRETEST, 704 RECORD RETENTION, 705 EXAM 1, 706 EXAM 2, 707 WAITING, 708 RECEPTION, 710 TOILET, 711 VESTIBULE)	8
	604 ACC CUSTOMER SERVICE, 606 WAITING AREA	8
	163 ALCOVE	8
	151 BREAKROOM	24
	805 GAMEPLAY	SPOT REPLACE MISSING OR DAMAGED
	GROCERY	REPLACE ALL CUSTOMER VISIBLE TILES IN SERVICE DELI AND BAKERY. (2 TILES EACH IN PREP AREAS)
	300 PHARMACY	FULL TILE REPLACEMENT
	CARE CLINIC (801 HALLWAY, 835 CARE CLINIC, 836 EXAM 1, 837 EXAM 2, 838 EXAM 3, 839 CHARTS, 840 BREAK ROOM, 841 RESTROOM, 842 LAB)	18

	CEILING CLEANING
ALL CEILING TYPES	CLEAN EACH DIFFUSER/RETURN. CLEAN ALL TROFFER LIGHT LENSES. CLEAN 1/3 OF SPRINKLER HEADS.
LAY-IN CEILING	2'X2' CEILING GRIDS CLEAN WITHIN 2'-0" OF ALL DIFFUSERS/RETURNS. 2'X4' CEILING GRIDS CLEAN WITHIN 4'-0" OF ALL DIFFUSERS/RETURNS.
GYPSUM CEILING	CLEAN ENTIRE CEILING

GENERAL NOTES

1	PAINT ALL METAL DOOR FRAMES VISIBLE TO CUSTOMER (EXCEPT DOORS IN CMU WALLS) WITH EPOXY PAINT.
2	AT ROOMS SCHEDULED TO RECEIVE NEW PAINT: OMIT PAINT AT WALLS CONCEALED BY HALF-GONDOLAS, WALL STANDARDS OR WAREHOUSE RACKING WITH PEG-BOARD BACKING. AT WALL STANDARDS, GONDOLAS AND WAREHOUSE RACKING WITHOUT PEG-BOARD BACKING, PAINT WALL TO BASE. REF SPEC.
3	INSTALL MISSING CEILING TILES TO MATCH ADJACENT TILES IN ALL ROOMS WHERE LAY-IN CEILING TILE IS ETR.
4	AT EXPOSED PAINTED STRUCTURE OR DECK, PAINT NEW CONDUIT, DUCTWORK AND FIRE SPRINKLER PIPING (FIRE SPRINKLER HEADS TO REMAIN UNPAINTED) TO MATCH ADJACENT STRUCTURE OR DECK.
5	FOR PLASTIC LAMINATE WAINSCOT, INSTALL INSIDE AND OUTSIDE EDGE TRIM AT ALL EXPOSED EDGES, DO NOT INSTALL ON BLOCK WALLS, REFERENCE SPECIFICATIONS.
6	FOR PROTECTIVE WALL SURFACING WAINSCOT, INSTALL INSIDE AND OUTSIDE CORNER TRIM AND TOP CAP, DO NOT INSTALL ON BLOCK WALLS, REFERENCE SPECIFICATIONS.
7	WHEN PIECE REPLACING CEILING TILE GC TO MATCH NEW TILE TO ADJACENT SURROUNDING CEILING TILE.
8	WHERE NEW PLASTIC LAMINATE OR PROTECTIVE SURFACING WAINSCOT IS TO BE INSTALLED, REMOVE EXISTING LAMINATE AND/OR FINISHES TO BASE SUBSTRATE PRIOR TO INSTALLATION OF NEW. INSTALLATION OF NEW LAMINATE OVER EXISTING IS NOT ACCEPTABLE. NO EXCEPTIONS.
9	PROPERLY SEAL ALL EXISTING AND NEW PENETRATIONS IN FIRE RATED WALLS TO MAINTAIN FIRE RATING.
10	WHEN INSTALLING NEW OR REPLACING FRP, INSTALL NEW WALL BASE FULL WIDTH OF PANEL(S) TO MATCH EXISTING.
11	PATCH AND REPAIR ALL GYPSUM BOARD WALLS AND CEILINGS PRIOR TO PAINTING.
12	PAINT VERTICALLY MOUNTED HVAC GRILLES TO MATCH ADJACENT WALLS.
13	PROVIDE CONTINUOUS CLEAN TRANSITION BETWEEN PAINT COLORS.
14	PAINT CUSTOMER VISIBLE STRUCTURE AND COLUMNS AS INDICATED ON DETAIL 2-A3 AND 3-A3 UNO.
15	PAINT GYPSUM BOARD WALLS 6" BEHIND TOP AND SIDES OF REFRIGERATED CASES.
16	AT ALL SALES FLOOR AREAS, EXTEND WAINSCOT AND BASE AT EXPOSED GYP WALL TO NEAREST MERCHANDISE RACK. REF 1-A3.
17	NOT USED.
18	REPLACE ALL DAMAGED WALL GUARDS EXISTING ON CMU WALLS IN CUSTOMER VISIBLE AREAS AND OR IN ROOMS RECEIVING NEW WALL FINISHES. VERIFY ALL DAMAGED WALL GUARD LOCATIONS WITH WALMART CONSTRUCTION MANAGER.
19	INSTALL ALUMINUM CORNER GUARDS AT ALL OUTSIDE CORNERS WITH WAINSCOT. LOCATIONS SHOWN IN PLAN AND ELEVATION ARE NOT INDICATIVE OF ALL LOCATIONS WHERE CORNER GUARDS ARE TO BE INSTALLED.
20	AT NEW LAY-IN CEILING REF 5-A3.

SYMBOLS LEGEND

SYMBOL	DESCRIPTION
X-XX / 10.1	REFERENCE AT KEYNOTE INDICATOR / KEYNOTE INDICATOR
X.XX X.XX X.XX	A KEYNOTE OR BLOCK OF KEYNOTES WITH A LEADER ATTACHED APPLY SPECIFICALLY TO THE ITEM, AREA, OR SURFACE TO WHICH THE LEADER IS POINTING
SALES 100 X.XX X.XX	IN ADDITION TO THE ROOM FINISH SCHEDULE, A KEYNOTE OR BLOCK OF KEYNOTES ATTACHED TO THE ROOM NAME TAG APPLY TO THE ENTIRE ROOM
P3	COLOR INDICATOR
2-A2	FULL AND PARTIAL SECTION INDICATOR
2-A2	EXTERIOR AND INTERIOR ELEVATION INDICATOR
SALES 100	ROOM NAME AND NUMBER
A6	PARTITION TYPE INDICATOR
101 A	DOOR INDICATOR
M	WINDOW INDICATOR
TV	TV MONITOR
A	COLUMN LINE INDICATOR
100'-0" FF EL	HEIGHT ELEVATION INDICATOR
100'-0"	PLAN ELEVATION INDICATOR
5 A2	ENLARGED DETAIL INDICATOR
5 A2	DETAIL INDICATOR

SITE VERIFICATION REQUIREMENTS:

1. THE ARCHITECT HAS MADE A SCOPE VISIT WITH MEASUREMENTS AND PHOTOGRAPHS OF EXISTING CONDITIONS AND THE ARCHITECTURAL DRAWINGS INDICATE EXISTING CONDITIONS VERIFIED IN THE FIELD. IT, HOWEVER, REMAINS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS PRIOR TO THE SUBMISSION OF A BID AND TO THE COMMENCEMENT OF ANY WORK. NO ADDITIONAL COMPENSATION WILL BE PAID DUE TO THE CONTRACTOR'S FAILURE TO VERIFY EXISTING SITE CONDITIONS WHICH INCLUDE, BUT ARE NOT LIMITED TO, GRADES, EXTENT OF PAVING, OR UTILITIES.
2. ANY DISCREPANCY WITH THE EXISTING SITE CONDITIONS AND/OR THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR CLARIFICATION AND INSTRUCTION. THESE CONSTRUCTION DOCUMENTS HAVE BEEN DESIGNED AND DRAWN ASSUMING EXISTING BUILDING CONDITIONS MATCH THE ORIGINAL DRAWINGS. THE GENERAL CONTRACTOR, IMMEDIATELY UPON ARRIVAL AT THE SITE, SHALL VERIFY ALL EXISTING STRUCTURAL COLUMN DIMENSIONS, STRUCTURAL BEARING HEIGHTS, EXISTING DIMENSIONS, TOP OF MASONRY ELEVATIONS, ROOFING CONDITIONS (INCLUDING PARAPETS, SCUPPERS AND ROOF DRAINS), AND JOIST BEARING ELEVATIONS PRIOR TO THE FABRICATION OF ANY STRUCTURAL ITEMS. IF DISCREPANCIES ARE FOUND BETWEEN WHAT IS SHOWN ON THE DRAWINGS AND EXISTING FIELD CONDITIONS, CONTACT THE WALMART CONSTRUCTION MANAGER AND THE ARCHITECT IMMEDIATELY TO DETERMINE WHAT ACTION SHOULD BE TAKEN TO MATCH EXISTING CONDITIONS. THE BEGINNING OF STRUCTURAL STEEL FABRICATION BY THE GENERAL CONTRACTOR, STEEL FABRICATOR, OR JOIST MANUFACTURER MEANS ACCEPTANCE OF THE EXISTING CONDITIONS.
3. ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE. THE CONTRACTOR SHALL FIELD VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES (WHETHER SHOWN OR NOT) PRIOR TO THE SUBMISSION OF A BID OR THE COMMENCEMENT OF CONSTRUCTION. THE CONTRACTOR SHALL NOTIFY THE WALMART CONSTRUCTION MANAGER OF THE DISCOVERY OF EXISTING UTILITIES NOT SHOWN OR NOTED ON DRAWINGS.
4. THE CONTRACTOR SHALL VERIFY AND MAINTAIN (REPAIR IF DAMAGED) EXISTING IRRIGATION SYSTEMS AFFECTED BY THE CONSTRUCTION OF THIS PROJECT.
5. NOT USED.
6. THE CONTRACTOR SHALL VERIFY EXACT LOCATIONS AND DEPTHS OF UNDERGROUND UTILITY SERVICES PRIOR TO ANY EXCAVATION.
7. THE CONTRACTOR SHALL VERIFY ALL GRADES AND PROPOSED FINAL GRADES. IF RAMPS, STOOPS, STAIRS, SIDEWALKS, FLATWORK OR PAVING ARE INSTALLED, VERIFY FINAL GRADES SURROUNDING THE NEW CONSTRUCTION AND LIMITS OF PAVING, TO ACCOMMODATE THE REQUIRED PAVING AREAS. IF THERE IS A CONFLICT IN FIELD CONDITIONS, NOTIFY WALMART CONSTRUCTION MANAGER AND THE ARCHITECT PRIOR TO THE CONSTRUCTION OR ORDERING OF MATERIALS.
8. NOT USED.
9. NOT USED.
10. NOT USED.
11. REPORT ANY DISCREPANCIES FOUND IN THE FIELD IMMEDIATELY TO WALMART AND THE ARCHITECT PRIOR TO MAKING ANY STRUCTURAL MODIFICATIONS OR ORDERING OF ANY MATERIALS.

GENERAL CONSTRUCTION REQUIREMENTS:

1. ALL WORK SHALL BE DONE IN A SAFE AND WORKMANLIKE MANNER AND IN STRICT ACCORDANCE WITH THE LOCAL AND/OR STATE (IF APPLICABLE) BUILDING CODES, NATIONAL ELECTRIC CODE, ADA-ADAAG AND OTHER ADOPTED ACCESSIBILITY STANDARDS, OSHA, AND ALL APPLICABLE CODES, REGULATIONS, ORDINANCES AND AUTHORITIES HAVING JURISDICTION (AHJ).
2. PROVISIONS REGARDING THE USE OF GAS AND DIESEL EQUIPMENT WITHIN AN ENCLOSED BUILDING, FORMERLY INCLUDED IN THIS PARAGRAPH, ARE NOW INCLUDED IN SECTION 01351 - REGULATORY COMPLIANCE
3. PROVISIONS REGARDING CORDS FOR ELECTRICAL EQUIPMENT AND ROUTING OF EQUIPMENT CORDS AND HOSES, FORMERLY INCLUDED IN THIS PARAGRAPH, ARE NOW INCLUDED IN SECTION 01351 - REGULATORY COMPLIANCE
4. EACH SUBCONTRACTOR IS RESPONSIBLE FOR HAVING A THOROUGH KNOWLEDGE OF ALL DRAWINGS AND SPECIFICATIONS IN THEIR RELATED FIELD. THE FAILURE TO REVIEW THESE DOCUMENTS DOES NOT RELIEVE THE SUBCONTRACTOR OF ANY RESPONSIBILITY FOR PERFORMING WORK PROPERLY. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED BECAUSE OF CONDITIONS THAT OCCUR DUE TO FAILURE TO FAMILIARIZE WORKERS WITH THIS KNOWLEDGE.
5. THE EXISTING BUILDING SHALL BE PROTECTED FROM MOISTURE, DUST AND DEBRIS. INSTALL DUST PARTITIONS OR DRAPES AS REQUIRED AND/OR AS DIRECTED BY WALMART CONSTRUCTION MANAGER TO KEEP DUST AND MOISTURE FROM THE OPERATING AREAS OF THE STORE.
6. ANY DAMAGE TO WALMART'S PROPERTY, WHICH OCCURS DURING THE PROCESS OF CONSTRUCTION SHALL BE REPAIRED/REPLACED AT NO ADDITIONAL COST TO WALMART: THIS INCLUDES ALL MERCHANDISE. CONTRACTOR SHALL PAY THE COST FOR ALL DAMAGED MERCHANDISE.
7. THE CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF THE EXISTING BUILDING SECURITY AT ALL TIMES. THIS INCLUDES KEEPING THE BUILDING SECURE FROM PERSONS, ENVIRONMENTAL ELEMENTS OR HAZARDS. THE CONTRACTOR SHALL BE RESPONSIBLE TO MAINTAIN THE INTEGRITY OF ALL EXISTING SECURITY SYSTEMS. THE CONTRACTOR SHALL OBTAIN PERMISSION FROM THE STORE MANAGER PRIOR TO THE MODIFICATION OF ANY EXISTING SECURITY SYSTEM.
8. THE CONTRACTOR SHALL KEEP THE WORK AREA CLEAN AND FREE OF DEBRIS AND REMOVE ALL TRASH AND DEBRIS FROM THE CONSTRUCTION AREA DAILY. NO FLAMMABLE MATERIALS OR LIQUIDS MAY BE STORED IN THE EXISTING BUILDING.
9. REMOVE ANY EXISTING EQUIPMENT, FIXTURES, FURNISHINGS, ACCESSORIES, SERVICES, FINISHES OR SURFACES AS REQUIRED SHOWN OR NOT SHOWN, FOR THE INSTALLATION OF NEW CONSTRUCTION. PROVIDE FURRING FOR CONDUIT AND PIPING, SHOWN OR NOT, AND FINISH OUT FURRING TO MATCH ADJACENT EXISTING FINISHES.
10. REPAIR, RE-ROUTE, AND EXTEND ALL SERVICES, PIPING, CONDUIT OF EXISTING ITEMS AND EQUIPMENT AS REQUIRED DURING THE CONSTRUCTION PROCESS TO MAINTAIN NORMAL STORE OPERATIONS AND AS REQUIRED FOR THE INSTALLATION OF NEW CONSTRUCTION. THIS INCLUDES ALL ITEMS SHOWN OR NOT SHOWN ON THE DRAWINGS. RESET EXISTING EQUIPMENT, FIXTURES, FURNISHINGS, ACCESSORIES OR RELATED ITEMS AS REQUIRED FOR PROPER OPERATION
11. WHEN EQUIPMENT, FIXTURES, FURNISHINGS, ACCESSORIES, SERVICES, FINISHES OR SURFACES ARE TEMPORARILY REMOVED OR RELOCATED IN ORDER TO PERFORM WORK, THE CONTRACTOR IS RESPONSIBLE FOR RETURNING THEM TO THEIR ORIGINAL POSITION, RECONNECTION OF SERVICES AND APPROPRIATE MEANS OF ATTACHMENT UNLESS SPECIFICALLY DIRECTED TO DO OTHERWISE.
12. WHERE EXISTING FINISHES ARE TO REMAIN, CLEAN, REPAIR, PATCH AND REPAINT AS NECESSARY TO BLEND IN WITH ADJACENT WORK. COORDINATE WITH WALMART CONSTRUCTION MANAGER.
13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE TIMELY ORDERING OF MATERIALS TO PROHIBIT DELAYS OF THE CONSTRUCTION SCHEDULE OF THIS PROJECT. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE DELIVERY OF MATERIALS IN A TIMELY MANNER.
14. NOT USED
15. THE GENERAL CONTRACTOR SHALL RESPOND TO ALL REQUIREMENTS OF THE STRUCTURAL ENGINEER/ARCHITECT FOR VERIFICATIONS, RESPONSES, AND SUBMISSIONS.
16. IF MODIFICATION TO SPRINKLER SYSTEM IS REQUIRED THE GENERAL CONTRACTOR SHALL HIRE A LICENSED SPRINKLER CONTRACTOR. CONTRACTOR TO SUBMIT SIGNED AND SEALED SPRINKLER DRAWINGS FOR APPROVAL PRIOR TO ANY ALTERATION OF THE AUTOMATIC SPRINKLER SYSTEM. WORK TO BE DONE UNDER SEPARATE PERMIT.
17. NOT USED
18. MUD AND DEBRIS TRACKED ONTO OWNER PAVING OR CITY STREETS TO BE CLEANED IMMEDIATELY.
19. BUILDING COMPONENTS AFFECTED BY THE SCOPE OF WORK AND ALLOWED TO REMAIN SHALL BE SECURED TO PREVENT FALLING, LOOSENING, OR CREATING DAMAGE OF ANY KIND IN THE STORE.
20. DURING ENTIRE CONSTRUCTION PERIOD PROVIDE ONE U.L. LISTED 2A:20BC DRY CHEMICAL FIRE EXTINGUISHER, OR ONE STANDARD U.L. LISTED 2-1/2 GALLON WATER (E-10) AND ONE U.L. LISTED 10BC CARBON DIOXIDE FIRE EXTINGUISHER MOUNTED TOGETHER IN EACH 3000 SQ. FT. OF WORK AREA OR FRACTION THEREOF (MINIMUM OF TWO AVAILABLE IN ALL CONSTRUCTION AREAS AT ALL TIMES).
21. THE PROJECT SPECIFICATIONS FOR REMODEL PROJECTS ARE A PART OF THESE CONSTRUCTION DOCUMENTS AND MUST BE REFERRED TO FOR COMPLETE DOCUMENTATION.
22. ALL PLYWOOD SHALL BE FIRE RETARDANT IN ACCORDANCE WITH THE BUILDING CODE AND AHJ REQUIREMENTS.

DEMOLITION REQUIREMENTS:

1. ALL DEMOLITION SHALL BE CARRIED OUT IN A SAFE MANNER AND IN STRICT ACCORDANCE WITH OSHA REGULATIONS.
2. THE CONTRACTOR SHALL FIELD VERIFY THE EXTENT OF DEMOLITION. THE WORK INCLUDES, BUT IS NOT LIMITED TO, THE DEMOLITION AND REMOVAL OF WALLS, DOORS, FIXTURES, PLUMBING, PAVING, MECHANICAL AND ELECTRICAL ITEMS INCLUDING CONDUITS AND DUCTWORK AS SHOWN ON DRAWING OR AS REQUIRED FOR THE INSTALLATION OF THE NEW WORK FOR A COMPLETE JOB.
3. WHEN UTILITIES ARE REMOVED, CAP AND SEAL A MINIMUM OF 8" BELOW FINISH FLOOR OR A MINIMUM OF 6" ABOVE FINISH CEILING.
4. WHEN REMOVING EXISTING STRUCTURAL ITEMS, IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ADEQUATE SHORING, BRACING AND SUPPORT SYSTEMS TO KEEP THE EXISTING STRUCTURE INTACT AND IN A SAFE CONDITION. REFER TO SECTIONS 02023 AND 02251.
5. NOT USED
6. NOT USED
7. NOTES INDICATING DEMOLITION WORK ARE NOT CONFINED SOLELY TO THE DEMOLITION PLANS. THE GENERAL CONTRACTOR SHALL REVIEW ALL CONSTRUCTION DOCUMENTS, INCLUSIVE OF SCHEDULES AND SPECIFICATIONS, TO DETERMINE FULL EXTENT OF DEMOLITION WORK.

STRIPING CONDITIONS



STRIPING AT HALLWAY DOOR

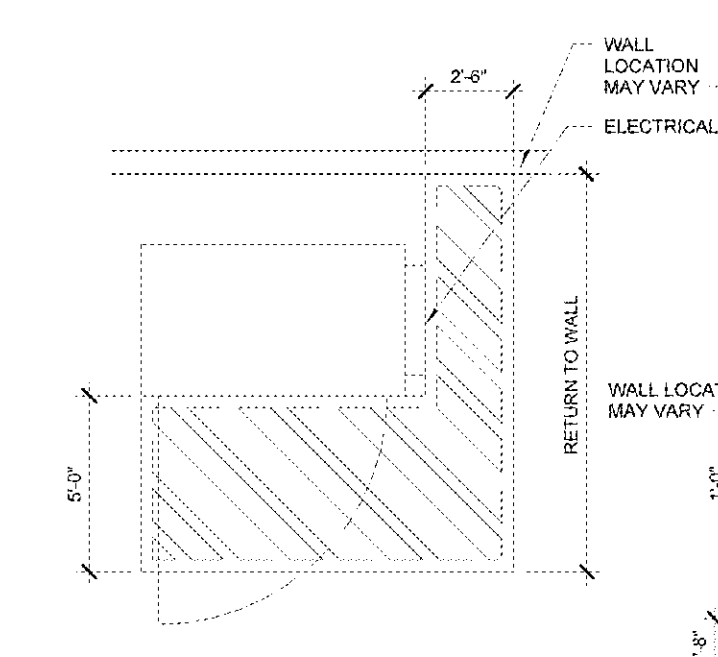

STRIPING AT BALER



STRIPING AT EYEWASH



STRIPING AT COMPACTOR

STRIPING REQUIREMENTS
1. 4" WIDE STRIPES USING YELLOW FLOOR MARKING TAPE @ 12" ON CENTER, @ 45 DEGREE ANGLE TO 4" WIDE EXTERIOR BOUNDARY LINES
2. IF EXISTING HALLWAY, BALER, COMPACTOR, OR EYEWASH WARNING AREAS ARE PAINTED SOLID OR HAVE INCORRECT PATTERN, REMOVE EXISTING PAINT AND APPLY TAPE PER THE STRIPING CONDITIONS SHOWN HERE.

ABBREVIATION LEGEND

GENERAL ABBREVIATIONS

ABBR	DEFINITION
AB	ANCHOR BOLT
ACI	AMERICAN CONCRETE INSTITUTE
ACRYL	ACRYLIC
ADA	AMERICANS WITH DISABILITIES ACT
ADJ	ADJACENT
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AISC	AMERICAN INSTITUTE OF STEEL CONSTRUCTION
ARCH	ARCHITECTURAL
ASTM	AMERICAN SOCIETY OF TESTING AND MATERIALS
AWS	AMERICAN WELDING SOCIETY
BFF	BELOW FINISHED FLOOR
BL	BLOCK LINTEL
BO	BOTTOM OF
BOS	BOTTOM OF STEEL
BRG	BEARING
CJ	CONTROL JOINT
CL	CENTERLINE
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS
CU	CONDENSING UNIT
DIA	DIAMETER
DSD	DIRECT STORE SHIPPING DELIVERY
EAS	ELECTRONIC ARTICLE SURVEILLANCE
EDC	ELECTRICAL DISTRIBUTION CENTER
EIFS	EXTERIOR INSULATION AND FINISH SYSTEM
[illegible]	EXHAUST FAN
[illegible]	EXPANSION JOINT
[illegible]	ELEVATION
[illegible]	ELECTRICAL
EQ	EQUAL
ETR	EXISTING TO REMAIN
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
FDN	FOUNDATION
FF	FINISHED FLOOR
FRP	FIBER REINFORCED PLASTIC
FS	FAR SIDE
FTG	FOOTING
FV	FIELD VERIFY
GA	GAUGE
GC	GENERAL CONTRACTOR
GM	GENERAL MERCHANDISE
GR	GROCERY
GYP BD	GYPSUM BOARD
HC	HANDICAP
HDTV	HIGH DEFINITION TELEVISION
HORIZ	HORIZONTAL
HSA	HEADED STUD ANCHOR
HSS	HOLLOW STRUCTURAL SECTION
HT	HEIGHT
INFO	INFORMATION
ISO	ISOLATION
JBE	JOIST BEARING ELEVATION
JST	JOIST
JT	JOINT
KSI	KIPS PER SQUARE INCH
L	LENGTH
LB	POUNDS
LLH	LONG LEG HORIZONTAL
LLV	LONG LEG VERTICAL
LONG	LONGITUDINAL
MAX	MAXIMUM
MAU	MECHANICAL AIR UNIT
ME	MASONRY ELEVATION
MECH	MECHANICAL
MEP	MECHANICAL ELECTRICAL PLUMBING
MFR	MANUFACTURER
MIN	MINIMUM
MISC	MISCELLANEOUS
MO	MASONRY OPENING
MTL	METAL
NIC	NOT IN CONTRACT
NO	NUMBER
NS	NEAR SIDE
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OH	OPPOSITE HAND
PAF	POWDER ACTUATED FASTENER
PCF	POUNDS PER CUBIC FOOT
PFC	PAINT, FIX, CLEAN
PL	PLATE
PLAM	PLASTIC LAMINATE
PLAST	PLASTIC
PLF	POUNDS PER LINEAR FOOT
PMEJ	PREMOLDED EXPANSION JOINT
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PVC	POLYVINYL CHLORIDE
QTY	QUANTITY
RC	REFRIGERATION CONTRACTOR
REF	REFER TO
REINF	REINFORCING
REQD	REQUIRED
REV	REVERSE
RO	ROUGH OPENING
RTU	ROOF TOP UNIT
RXPFC	PHARMACY PAINT FIX CLEAN
SCB	SANITARY COVE BASE
SCHED	SCHEDULE
SDI	STEEL DECK INSTITUTE
SIM	SIMILAR
SJI	STEEL JOIST INSTITUTE
SPECS	SPECIFICATIONS
SS	STAINLESS STEEL
STD	STANDARD
STRUC	STRUCTURAL
T&B	TOP AND BOTTOM
TEMP	TEMPERED
THK	THICKNESS
TO	TOP OF
TOC/TC	TOP OF CONCRETE
TOF	TOP OF FOOTING
TOGB	TOP OF GRADE BEAM
TOM	TOP OF MASONRY
TOP/TP	TOP OF PAVING
TOS	TOP OF STEEL
TRANS	TRANSVERSE
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
VCPFC	VISION CENTER PAINT FIX CLEAN
VERT	VERTICAL
W	WIDTH
WM	WALMART

DEFINITION LEGEND

FINAL MERCHANDISE PLAN - FINALIZED MERCHANDISE PRINT FROM WM ALSO REFERRED TO AS THE DEAL BOX COPY

SGA Design Groupp.c.
1437 South Boulder, Suite 550
Tulsa, Oklahoma 74119.3609
p: 918.587.8600
f: 918.587.8601
www.sgadesigngroup.com

STIPULATION FOR REUSE
THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC SITE AT: CAMDEN, SC CONTEMPORANEOUSLY WITH ITS ISSUE DATE ON 12/18/19 AND IT IS NOT SUITABLE FOR USE ON A DIFFERENT PROJECT SITE OR AT A LATER TIME. USE OF THIS DRAWING FOR REFERENCE OR EXAMPLE ON ANOTHER PROJECT REQUIRES THE SERVICES OF PROPERLY LICENSED ARCHITECTS AND ENGINEERS. REPRODUCTION OF THIS DRAWING FOR REUSE ON ANOTHER PROJECT IS NOT AUTHORIZED AND MAY BE CONTRARY TO THE LAW.

CONSULTANTS

Walmart
CAMDEN, SC
STORE NO: 0634-236
JOB NUMBER: 1952011 PROTO: 172 PROTO SC
2020 GENERAL REMODEL

ISSUE BLOCK

CHECKED BY:	AVT/RO
DRAWN BY:	MR
PROTO CYCLE:	10/25/19
DOCUMENT DATE:	12/18/19

THE RECORD COPY OF THIS DRAWING IS ON FILE AT THE OFFICES OF SGA DESIGN GROUP.
THIS ELECTRONIC DOCUMENT IS RELEASED FOR THE PURPOSE OF REFERENCE, COORDINATION, AND/OR FACILITY MANAGEMENT. THIS DRAWING SHALL NOT BE CONSIDERED FINAL OR COMPLETE UNLESS IT IS SIGNED AND SEALED BY THE ARCHITECT.

GENERAL INFORMATION

SHEET: N1

Order Plans @ WWW.DLine.com