LIGHT FIXTURE SCHEDULE

"OW" FIXTURES AND LAMPS ARE FURNISHED BY THE OWNER FOR INSTALLATION BY THE CONTRACTOR. "GC" FIXTURES AND LAMPS ARE FURNISHED AND INSTALLED BY THE CONTRACTOR.

TYPE	SUPPLIED BY	DESCRIPTION	VENDOR/MFR	MODEL	VOLTAGE	INPUT VA	COLOR TEMP	LIGHT SOURCE	LAMP QTY	MOUNTING	COUNT
1	OW	8' STRIP (WIRELESS DIM)	ACUITY BRANDS LIGHTING INC	CLX L90 10000LM HEF RDL MVOLT EOHN 40K 80CRI PLR1G AE1CD WH	120/277	67 VA	4000K	INTEGRAL LED	-	SURFACE	6
2	OW	4' STRIP (WIRELESS DIM)	ACUITY BRANDS LIGHTING INC	CLX L48 4000LM HEF RDL MVOLT EOHN 40K 80CRI PLR1G AE1CD WH	120/277	28 VA	4000K	INTEGRAL LED	-	SURFACE	1
3	OW	4' SEALED STRIP W/CORD	LSI INDUSTRIES INC	WM EG3 4 LED 8L DA S UNV DIM 40 SQ ESC SL	120/277	50 VA	4000K	INTEGRAL LED	-	SURFACE	34
7	OW	1' x 4' VOLUMETRIC TROFFER	CREE INC	ZR14M-40L-40K-10V-FD	120/277	30 VA	4000K	INTEGRAL LED	-	RECESSED	28
9	OW	2' x 2' VOLUMETRIC TROFFER	CREE INC	ZR22C-40L-40K-10W-FD	120/277	32 VA	4000K	INTEGRAL LED	-	RECESSED	17
10	OW	2' x 4' VOLUMETRIC TROFFER	CREE INC	ZR24M-40L-40K-10V-FD	120/277	30 VA	4000K	INTEGRAL LED	-	RECESSED	16
14	OW	2' x 4' FLAT PANEL	REXEL INC	P72T440	120/277	72 VA	4000K	INTEGRAL LED	-	RECESSED	10
17	OW	EMERGENCY LIGHT	REXEL INC	EVHC8IOP-WM	120/277	3 VA	-	INTEGRAL LED	-	WALL	3
18	OW	EMERGENCY LIGHT	REXEL INC	EVHC8IOP-WM	120/277	3 VA	-	INTEGRAL LED	-	WALL / CEILING	4
34	OW	8' STRIP	ACUITY BRANDS LIGHTING INC	CLX L96 8000LM SEF RDL MVOLT GZ10 40K 80CRI PLR1LVG WH	120/277	53 VA	4000K	INTEGRAL LED	-	REF DETAILS	24
35	OW	8" TRACK MOUNTED CYLINDER	REXEL INC	C4LP-N-V-D-30-95-35-2S-L1-TRACK MOUNT	120/277	34 VA	3500K	INTEGRAL LED	-	TRACK	38
39	OW	8' STRIP (16% UPLIGHT)	GE LIGHTING SOLUTIONS LLC	LUSC840A0/174/0/0/CSWHTE	120/277	80 VA	4000K	INTEGRAL LED	-	REF DETAILS	23
40	OW	6' EDGELIT BLADE STRIP	GE LIGHTING SOLUTIONS LLC	LEL60A093MMT35VQG2WHTE	120/277	68 VA	3500K	INTEGRAL LED	-	TRACK	51
65	OW	2' VANITY LIGHT	REXEL INC	LLMS-2-L17/835-S-SQ-UNV	120/277	21 VA	3500K	INTEGRAL LED	-	WALL	14
68	OW	CIRCULAR RECESSED DOWNLIGHT	CREE INC	5-DL6-11L-35K SDL6T-M-P-W-WF	120/277	12 VA	3500K	INTEGRAL LED	-	RECESSED	1
68R	OW	CIRCULAR RECESSED DOWNLIGHT	CREE INC	LR6-10L-35K-277V-W RR6-277V	120/277	12 VA	3500K	INTEGRAL LED	-	RECESSED	57

LIGHT FIXTURE NOTES (APPLIES TO ALL LIGHT FIXTURES):

A. SUPPORT ALL RECESSED OR LAY-IN LIGHT FIXTURES DIRECTLY FROM THE FIXTURE HOUSING TO THE STRUCTURE ABOVE. WITH A MINIMUM OF TWO 12-GAUGE STEEL WIRES LOCATED AT DIAGONALLY OPPOSITE CORNERS. FIXTURE SUPPORT WIRES MAY BE SLIGHTLY LOOSE TO ALLOW THE FIXTURE TO SEAT IN THE GRID GRID SYSTEM. ATTACH LIGHT FIXTURES TO THE SUSPENDED CEILING SYSTEM TO RESIST 100 PERCENT OF THE FIXTURE WEIGHT ACTING IN ANY DIRECTION. COMPLETE IN ACCORDANCE WITH APPLICIABLE BUILDING CODE REQUIREMENTS.

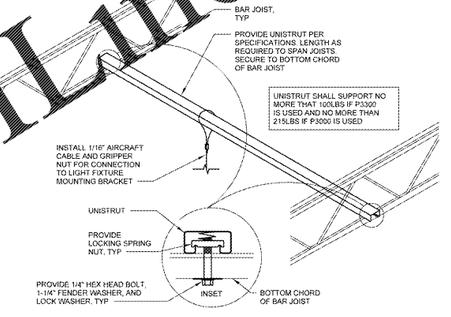

3 SUSPENDED LIGHTING CONNECTIONS TO STRUCTURE
NTS

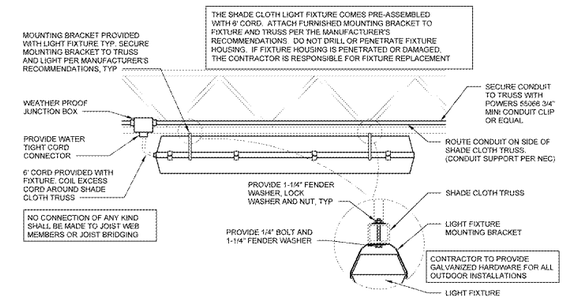

2 SHADE CLOTH LIGHTING
NTS

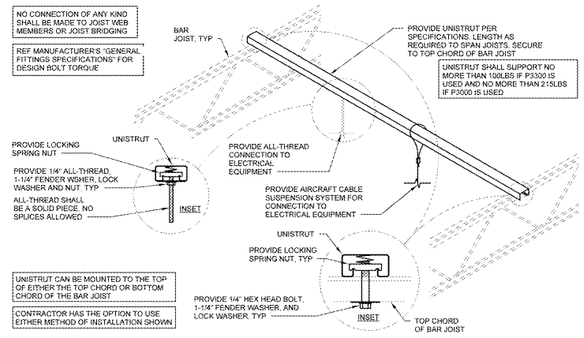

1 GENERAL ELECTRICAL CONNECTIONS TO STRUCTURE
NTS

Order Plans @ WWW.LDHLine.com

STIPULATION FOR REUSE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF RTM ENGINEERING CONSULTANTS AND SHALL NOT BE REUSED ON ANY OTHER PROJECT OR ADDITIONS TO THIS PROJECT WITHOUT THE EXPRESS WRITTEN PERMISSION OF RTM ENGINEERING CONSULTANTS. ANY REUSE WITHOUT SUCH PERMISSION WILL BE AT THE USER'S SOLE RISK AND WITHOUT LIABILITY OR LEGAL EXPOSURE TO RTM ENGINEERING CONSULTANTS. THE USER SHALL INDEMNIFY AND HOLD HARMLESS RTM ENGINEERING CONSULTANTS FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM. ANY REUSE OF THESE PLANS AND SPECIFICATIONS WILL BE CONSTRUED AS A CONFIRMATION OF THIS AGREEMENT BY THE USER.

CONSULTANTS

rtm engineering consultants
3330 E. Battlefield Road, Ste. 1502
Springfield, MO 65804
rtmengineering.com | 417.881.5020

Walmart

CAMDEN, SC
STORE NO.: 00634-236

JOB NUMBER:	19020111
PROTO:	1T2 PROTO SC

2020 GENERAL REMODEL

ISSUE BLOCK

CHECKED BY:	JEE
DRAWN BY:	TJP
PROTO CYCLE	10/25/19
DOCUMENT DATE:	12/18/19

NOT FOR CONSTRUCTION

LIGHTING DETAILS AND SCHEDULES

SHEET:
E1.3