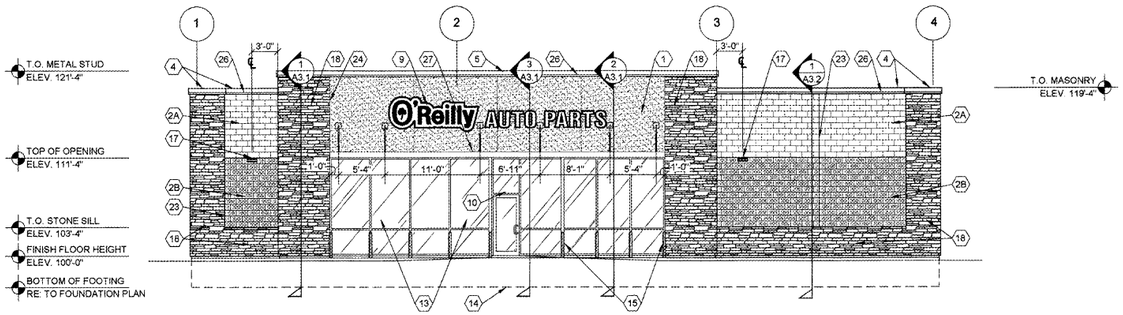

1 SOUTH EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

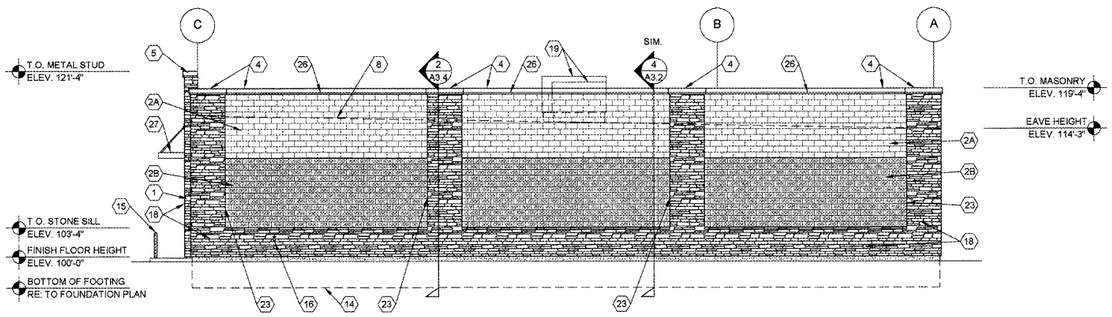

2 EAST EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

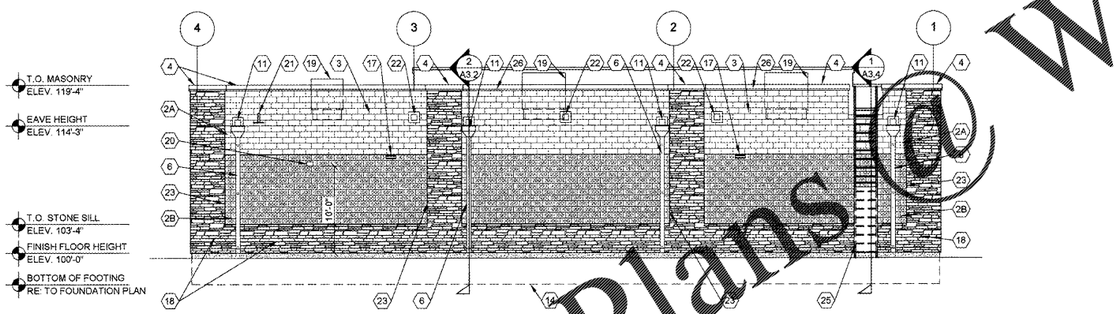

3 NORTH EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

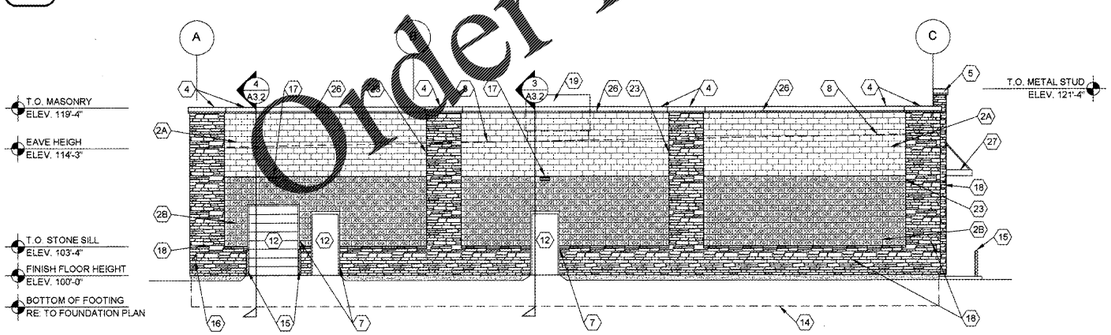

4 WEST EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

EXTERIOR FINISH SCHEDULE

EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)
KEY NOTE NO. 1:
MFG: DRYVIT SPECIFIED. EQUAL BY STO OR BASF (NO SUBSTITUTES)
SERIES: OUTSULATION PLUS MD
TEXTURE: SANDBLAST
COLOR: DRYVIT "ORAP011030S" STRATOTONE HIGH PERFORMANCE
COLOR STANDARD: SHERWIN WILLIAMS "POSITIVE RED" SW6871 (SHER-CRYL) GLOSS

KEY NOTE NO. 2B (EIFS CORNICE):
MFG: DRYVIT SPECIFIED. EQUAL BY STO OR BASF (NO SUBSTITUTES)
SERIES: OUTSULATION PLUS MD
TEXTURE: SANDBLAST
COLOR: SHERWIN WILLIAMS "SOFTER TAN" SW6141 (SHER-CRYL) GLOSS, WHERE ABOVE RED EIFS AT PORTAL, COLOR SHALL BE RED TO MATCH.

UNIT MASONRY
KEY NOTE NO. 2A:
TYPE: CONCRETE MASONRY UNIT (CMU)
MFG: (REFER TO PROJECT MANUAL)
SIZE: 8"X8"X16" (NOM.)
TEXTURE: SMOOTH FACE
COURSING: RUNNING BOND
FINISH: FIELD PAINT (ACCENT COLOR)
COLOR: SHERWIN WILLIAMS "SOFTER TAN" SW6141 (SEMI-GLOSS)
NOTE: REFER TO "CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS" FOR ADDITIONAL REQUIREMENTS.

KEY NOTE NO. 2B:
TYPE: CONCRETE MASONRY UNIT (CMU)
MFG: (REFER TO PROJECT MANUAL)
SIZE: 8"X8"X16" (NOM.)
TEXTURE: SPLIT FACE
COURSING: RUNNING BOND
FINISH: FIELD PAINT (FIELD COLOR)
COLOR: SHERWIN WILLIAMS "LATTE" SW6108 (SEMI-GLOSS)
NOTE: REFER TO "CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS" FOR ADDITIONAL REQUIREMENTS.

FLASHING AND SHEET METAL
KEY NOTE NO. 3:
TYPE: STANDING SEAM ROOFING SYSTEM
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
COLOR: GALVALUME

KEY NOTE NO. 4:
TYPE: CAP FLASHING AT MASONRY
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
FINISH: PREFINISHED
COLOR: EQUAL TO BUTLER BUILDING "COOL BIRCH WHITE"

KEY NOTE NO. 5:
TYPE: CAP FLASHING AT EXTERIOR INSULATION FINISH SYSTEM (EIFS)
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
FINISH: FACTORY PRIMED AND FIELD PAINT
COLOR: SHERWIN WILLIAMS "POSITIVE RED" SW6871 (SHER-CRYL) GLOSS
WITH SHERWIN WILLIAMS THREE COMPONENT (B65T100 / B65V105 / B65C105) CLEAR URETHANE

KEY NOTE NO. 6:
TYPE: CONDUCTOR HEAD AND DOWNSPOUTS
MFG: (PEMB FURNISHED AND INSTALLED)
FINISH: FACTORY PRIMED / FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY FIELD COLOR) (SEMI-GLOSS)

DOORS AND WINDOWS
KEY NOTE NO. 7:
TYPE: STEEL DOORS AND FRAMES (DOORS NO. 2 AND 7)
MFG: (OWNER FURNISHED / CONTRACTOR INSTALLED)
FINISH: FACTORY PRIMED AND FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY COLOR) (SEMI-GLOSS)

KEY NOTE NO. 12:
TYPE: STEEL DOORS AND FRAMES (DOORS NO. 3)
MFG: (REFER PROJECT MANUAL)
FINISH: FACTORY PRIMED AND FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY COLOR) (SEMI-GLOSS)

KEY NOTE NO. 13:
TYPE: (REFER TO WINDOW SCHEDULE)
MFG: EFCO, KAWNEER, OR OLD CASTLE (VISTA WALL). (NO SUBSTITUTES)
COLOR: EFCO "IVY", KAWNEER "DARK IVY", VISTA WALL "INTERSTATE GREEN"

PAINTING
KEY NOTE NO. 15:
TYPE: STEEL BOLLARDS (REFER TO CIVIL DRAWINGS)
FINISH: FIELD PRIME AND PAINT
COLOR: SHERWIN WILLIAMS "HUNT CLUB" SW6468 (SEMI-GLOSS)

STONE VENEER
KEY NOTE 18:
TYPE: STONE VENEER
MFG: ELDORADO STONE
FINISH: RUSTIC LEDGE
COLR: SAWTOOTH
**FIELD PAINT EXPOSED BLOCK BELOW TO MATCH STONE COLOR.
COATS:
(1) COAT SW "PREPRITE" BLOCK FILLER B25W25 (NO LESS THAN 8 MILS) AND (2) COATS SW "CONFLEX XL" SMOOTH ELASTOMERIC A5-400 (NO LESS THAN 5.7 MILS EACH COAT)

COATS (COLD WEATHER APPLICATIONS):
(1) COAT SW "LOXON BLOCK SURFACER" (NO LESS THAN 8 MILS) AND (2) COATS SW "ULTRACRETE" SOLVENT BORNE SMOOTH B46 (NO LESS THAN 8 MILS EACH COAT OR 16 MILS TOTAL)

KEY NOTE 18:
TYPE: STONE VENEER SILL
MFG: ELDORADO STONE
FINISH: SNAPPED EDGE
COLOR: WALNUT

CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS

GENERAL
1. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

2. MANUFACTURER: SHERWIN WILLIAMS SPECIFIED. EQUAL PRODUCTS BY PPG INDUSTRIES ACCEPTABLE (NO SUBSTITUTES).

3. APPLICATION: INSTALL PER MANUFACTURER'S RECOMMENDATIONS FOR PROJECT CONDITIONS. EACH COAT SPECIFIED SHALL BE SPRAY APPLIED AND BACK ROLLED. COVERAGE THICKNESS INDICATED IN WET MIL UNITS, UNLESS OTHERWISE INDICATED.

4. QUALITY CONTROL: SUBMIT INSTALLER AND MANUFACTURER WARRANTIES SPECIFIED.

CONCRETE MASONRY UNIT (CMU) EXTERIOR SURFACE COATINGS:
1. FINISH COLORS: (REFER EXTERIOR FINISH SCHEDULE).

2. PRIMER: "LOXON" ACRYLIC BLOCK SURFACER "LX01W0200-LXN BLOCK SURF WHT" (NO LESS THAN 16 MILS). TWO COATS MAY BE REQUIRED TO ACHIEVE PINHOLE FREE SURFACE.

3. COAT 1: "LOXON" SELF-CLEANING ACRYLIC COATING "LX13W0051-LXN SELF-CLEAN EW" (NO LESS THAN 6 MILS).

4. COAT 2: "LOXON" SELF-CLEANING ACRYLIC COATING "LX13W0051-LXN SELF-CLEAN EW" (NO LESS THAN 6 MILS).

CONCRETE MASONRY UNIT (CMU) INTERIOR SURFACE COATINGS:
1. FINISH COLOR: MATCH "W-2" (REFER INTERIOR FINISH TYPES).

2. APPLY PRIOR TO INSTALLATION OF INTERIOR SURFACE FURRING, INSULATION, AND GYPSUM BOARD ASSEMBLIES.

3. PRIMER: "LOXON" WATER BLOCKING PRIMER "LX12W0050-LXN WTR BLCK PR WH" (NO LESS THAN 6 MILS). APPLICATION WITH OVERNIGHT DRYING BETWEEN COAT 1.

4. COAT 1: "LOXON" WATER BLOCKING PRIMER "LX12W0050-LXN WTR BLCK PR WH" (NO LESS THAN 6 MILS).

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
B. REFER TO CIVIL DRAWINGS FOR ADDITIONAL REQUIREMENTS.
C. REFER TO PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR SYSTEM TYPES AND ADDITIONAL REQUIREMENTS.
D. REFER TO EXTERIOR FINISH SCHEDULE FOR MATERIAL TYPES.
E. REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.
F. REFER TO SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

KEY NOTES

1. EXTERIOR INSULATION AND FINISH SYSTEM (EIFS).
2A. CONCRETE MASONRY UNIT (CMU) EXTERIOR WALL CONSTRUCTION (ACCENT COLOR). REFER TO PLANS, SECTIONS, AND DETAILS FOR ADDITIONAL REQUIREMENTS.
2B. CONCRETE MASONRY UNIT (CMU) EXTERIOR WALL CONSTRUCTION (FIELD COLOR). REFER TO PLANS, SECTIONS, AND DETAILS FOR ADDITIONAL REQUIREMENTS.
3. PRE-ENGINEERED METAL BUILDING SHEET METAL ROOFING SYSTEM (BEYOND).
4. METAL BUILDING SHEET METAL FLASHING (AT MASONRY). FIELD BREAK FROM PRE-FINISHED FLAT STOCK AS REQUIRED.
5. METAL BUILDING SHEET METAL FLASHING (AT EIFS). FIELD BREAK FROM PRIME PAINTED FLAT STOCK AS REQUIRED.
6. PRE-FABRICATED SHEET METAL CONDUCTOR HEAD AND DOWNSPOUT SYSTEM.
7. CONCRETE MASONRY UNIT (CMU) CORNER FINISHED JAMB UNIT.
8. LINE OF ROOF BEYOND WITH 1/4":12" SLOPE MINIMUM.
9. SURFACE MOUNTED SIGN OWNER FURNISHED AND INSTALLED. PROVIDE BACKING FOR MOUNTING AND ROUGH-IN ELECTRICAL. COORDINATE REQUIREMENTS WITH OWNER. REFER TO SHEET SG2.1.
10. BUILDING ADDRESS NUMBERS IN 6" HIGH HELVETICA WHITE VINYL ADHERED TO EXTERIOR FACE OF GLAZING.
11. PRE-ENGINEERED METAL BUILDING THRU WALL SCUPPER SYSTEM.
12. EXTERIOR DOOR AND FRAME SYSTEM. REFER TO FLOOR PLAN AND DOOR SCHEDULE FOR TYPES.
13. EXTERIOR WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULE FOR TYPES.
14. APPROXIMATE LINE OF FOUNDATION, REFER TO STRUCTURAL DRAWINGS.
15. STEEL BOLLARDS, REFER TO CIVIL AND STRUCTURAL DRAWINGS.
16. HOSE BIB, REFER TO PLUMBING DRAWINGS.
17. LIGHT FIXTURE, REFER TO ELECTRICAL DRAWINGS.
18. MANUFACTURED STONE VENEER AND SILL. REFER TO EXTERIOR FINISH SCHEDULE.
19. MECHANICAL ROOF TOP UNIT (BEYOND), REFER TO MECHANICAL DRAWINGS.
20. MECHANICAL WALL PENETRATIONS. REFER TO MECHANICAL DRAWINGS. PROVIDE FRAMING, FLASHING, AND SEALANT AS REQUIRED. INSTALL RESTROOM EXHAUST FANS 12" MINIMUM ABOVE INTERIOR CEILING FRAMING.
21. PLUMBING ROOF VENT (BEYOND), REFER TO PLUMBING DRAWINGS AND DETAIL 11/A4.2.
22. SECONDARY OVERFLOW SCUPPER. REFER TO WALL SECTIONS.
23. MASONRY CONTROL JOINT, REFER TO STRUCTURAL DRAWINGS. PROVIDE SEALANT OVER 1/2" DIAMETER FOAM BACKER ROD.
24. RUSTICATION JOINT, REFER TO DETAIL 6/A3.2.
25. PRE-FABRICATED ALUMINUM ROOF ACCESS LADDER SYSTEM (MILL FINISH). PROVIDE SECURITY PANEL WITH SIDE GUARDS. LADDER TO COMPLY WITH "OSHA" AND "ANSI" REQUIREMENTS. ALL CONNECTIONS TO BE FACTORY WELDED AND FIELD ANCHORED TO WALL AND CONCRETE SLAB CONSTRUCTION PER MANUFACTURER'S RECOMMENDATIONS. TREADS 12" O.C. MAX. WITH 300 LBS MINIMUM DESIGN LOAD. LADDER TO BE 1'-6" MINIMUM CLEAR WIDTH BETWEEN VERTICAL SIDE RAILS. PROVIDE 7" MINIMUM CLEARANCE BETWEEN INSIDE FACE OF LADDER AND EXTERIOR WALL ASSEMBLY. SUBMIT SHOP DRAWINGS FOR REVIEW AND APPROVAL.
26. EXTERIOR INSULATION AND FINISH SYSTEM (EIFS) CORNICE. REFER TO EXTERIOR FINISH SCHEDULE.
27. PRE FABRICATED METAL CANOPY EQUAL TO ARCHITECTURAL SHADE PRODUCTS (LARRY FISHER -770-213-2131) 8" FASCIA, 3'-0" PROJECTION, FLAT METAL CANOPY WITH 1" DIA. TENSION RODS AS SHOWN. LOCATE RODS 12' FROM CANOPY END UNLESS DIMENSIONED OTHERWISE **(COORDINATE EXACT LOCATION OF ROD BRACING WITH APPROVED SIGNAGE PLANS, SUBMITTED BY OTHERS, TO AVOID CONFLICT WITH SIGN LOCATION).** ROD COLOR TO BE GREEN TO MATCH CANOPY COLOR. **METAL DECKING** - .065 EXTRUDED ALUMINUM IN 6" WIDE PANELS; MIL FINISH ALUMINUM TOP, EXPOSED BOTTOM SHALL BE POWDER COATED FINISH - TO MATCH STOREFRONT. PROVIDE (1) SCUPPER AT EACH END OF GUTTER FASCIA AWAY FROM BUILDING. PROVIDE 3RD PARTY ENGINEERED PLANS SEALED FOR THE STATE OF VIRGINIA. REFER TO WALL SECTIONS AND STRUCTURAL.

Order Plans @ WWW.LDILine.com

CRAIG A. SCHNEIDER, AIA
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@estherjschneider.com

1-29-2020

PROJECT:
NEW O'REILLY AUTO PARTS STORE
U.S. HIGHWAY 11
STRASBURG, VA

EXTERIOR ELEVATIONS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4253
DATE:	11-2-18
REVISION DATE:	6-20-19
	9-25-19
	1-21-2020

A2.1