ALL PANELBOARDS, TRANSFORMERS, TRANSFER SWITCH KIT AND DISCONNECTS WILL BE SUPPLIED BY THE OWNER (OREILLY). ELECTRICAL GEAR SHALL BE DIRECT ORDERED AND/OR RELEASED FROM THE LISTED ELECTRICAL EQUIPMENT DISTRIBUTOR. SEE "ELECTRIC SERVICE RESPONSIBILITIES" FOR ADDITIONAL CLARIFICATION:

GRAYBAR ELECTRIC CO. INC.
11885 LACKLAND ROAD
ST. LOUIS, MO. 63146

GRAYBAR OREILLY TEAM
EMAIL: oreilly@graybar.com
TOLL FREE: (314) 573-2080

MP PANELBOARD SCHEDULE

MAINS: 400A MAIN LUGS ONLY | VOLTAGE: 208
TYPE: SQUARE D, NQ | PHASE: 3Ø,4W
MOUNTING: SURFACE | WIDTH: 20
SCCR: 22K AIC | SPACE(S): 42

ACCESSORIES:
1. EQUIPMENT GROUND BAR
2. ISOLATED GROUND BAR
3. * SQ. D' #QO1FA – WITH LOCKABLE CLIPS
4. * MUST BE TYPE "HACR" BREAKER
5. FEED THRU LUGS

CKT	CKT BRK	WIRE	LOAD DESCRIPTION	(KVA)	A(KVA)	B(KVA)	C(KVA)	(KVA)	LOAD DESCRIPTION	WIRE	CKT BRK	CKT
1	20A/1P	#12s	LIGHTING/EXHAUST FAN	0.51	4.44			3.93	RTU-1 7.5-TON	#8s	+50A/3P	2
3	20A/1P	#12s	LIGHTING	1.93		4.98		3.93				4
5	20A/1P	#12s	LIGHTING	1.53			5.46	3.93				6
7	20A/1P	#12s	LIGHTING	1.24	4.02			2.78	RTU-2 5-TON	#8s	+45A/3P	8
9	20A/1P	#12s	LIGHTING	1.12		3.90		2.78				10
11	20A/1P	#12s	LIGHTING	0.77			3.55	2.78				12
13	20A/1P	#12s	LIGHTING	0.82	4.75			3.93	RTU-3 7.5-TON	#8s	+50A/3P	14
15	-	-	SPACE	0		3.93		3.93				16
17	-	-	SPACE	0			3.93	3.93				18
19	-	-	SPACE	0	2.78			2.78	RTU-4 5-TON	#8s	+45A/3P	20
21	-	-	SPACE	0		2.78		2.78				22
23	20A/1P	#12s	BUILDING LIGHTING	0.24			3.02	2.78				24
25	20A/1P	#12s	SITE LIGHTING	0.62	0.62			0	LED SIGN BUILDING	#12s	*20A/1P	26
27	20A/1P	#12s	SITE LIGHTING	0.62		0.62		0	SPACE	-	-	28
29	20A/1P	#12s	SITE SIGN	1.30			1.30	0	SPACE	-	-	30
31	20A/1P	#12s	SITE SIGN	1.30	1.30			0	SPACE	-	-	32
33	*20A/1P	#12s	LED SIGN BUILDING	1.20		1.20		0	SPACE	-	-	34
35				0.03			0.03	0	SPACE	-	-	36
37	20A/3P	#12s	CRIOPOINT EQ-1000	0.03	0.03			0	SPACE	-	-	38
39				0.03		0.03		0	SPACE	-	-	40
41	20A/1P	#12s	XFMR J-BOX	0.60			1.20	0.60	LCP	#12s	20A/1P	42

TOTAL PHASE A (KVA)	TOTAL PHASE B (KVA)	TOTAL PHASE C (KVA)	TOTAL CONNECTED LOAD (KVA)	TOTAL AMPS
17.94	17.42	18.49	53.85	149.46

LIGHTING 7.02 | EXTERIOR LIGHTING 5.28 | TOTAL LIGHTING 12.30 | HVAC 40.26 | RECEPTACLES 13.37

PLP PANELBOARD SCHEDULE

MAINS: 400A MAIN LUGS ONLY | VOLTAGE: 208
TYPE: SQUARE D, NQ | PHASE: 3Ø,4W
MOUNTING: SURFACE | WIDTH: 20
SCCR: 22K AIC | SPACE(S): 42

ACCESSORIES:
1. EQUIPMENT GROUND BAR
2. ISOLATED GROUND BAR
3. *** GFI BREAKER CKT. #16 & #23
4. ** SQ. D' #QO1HAF CKT. #33
5. * MUST BE TYPE "HACR" BREAKER

CKT	CKT BRK	WIRE	LOAD DESCRIPTION	(KVA)	A(KVA)	B(KVA)	C(KVA)	(KVA)	LOAD DESCRIPTION	WIRE	CKT BRK	CKT
1	20A/1P	#10s	LATHE	1.70	2.20			0.50	CHECK IN RECEPT. (I.G.)	#12s	20A/1P	2
3	20A/1P	#10s	CUTOFF SAW	1.73		1.91		0.18	BATTERY RACK RECEPT.	#10s	20A/1P	4
5	20A/1P	#12s	CRIMPER	1.77			1.95	0.18	BATTERY RACK RECEPT.	#10s	20A/1P	6
7	20A/1P	#12s	RECEPTACLES	0.54	0.90			0.36	BREAK AREA RECEPTS.	#12s	20A/1P	8
9	20A/1P	#10s	STARTER/ALT. TESTER	1.68		1.68		0	SPACE	-	-	10
11	20A/1P	#10s	STARTER/ALT. TESTER	1.68			2.22	0.54	RTU RECEPTACLES	#12s	20A/1P	12
13	20A/1P	#10s	STARTER/ALT. TESTER	1.64	2.18			0.54	RECEPTACLES	#12s	20A/1P	14
15	20A/1P	#12s	RECEPTACLES	0.36		2.11		1.75	COKE MACHINE (ONLY)	#12s	***20A/1P	16
17	20A/1P	#12s	ISOLATED GRD. RECEPTS.	0.36			0.72	0.36	ISOLATED GRD. RECEPTS.	#12s	20A/1P	18
19	20A/1P	#12s	RECEPTACLES	0.18	0.90			0.72	ISOLATED GRD. RECEPTS.	#12s	20A/1P	20
21	30A/1P	#10s	BATTERY BACKUP (I.G.)	3.00		3.36		0.36	ISOLATED GRD. RECEPTS.	#12s	20A/1P	22
23	***20A/1P	#12s	WATER COOLER RECEPT.	0.90			1.62	0.72	ISOLATED GRD. RECEPTS.	#12s	20A/1P	24
25	20A/1P	#12s	RECEPTS./IRRIGATION	1.00	1.72			0.72	ISOLATED GRD. RECEPTS.	#12s	20A/1P	26
27	20A/1P	#12s	SECURITY	0.50		0.50		0	SPACE	-	-	28
29	-	-	SPACE	0			0.00	0	SPACE	-	-	30
31	-	-	SPACE	0	0.00			0	SPACE	-	-	32
33	**20A/1P	#12s	TANK WATER HEATER	1.65		2.01		0.36	ISOLATED GRD. RECEPTS.	#12s	20A/1P	34
35	20A/1P	#12s	ISOLATED GRD. RECEPTS.	0.36			0.72	0.36	ISOLATED GRD. RECEPTS.	#12s	20A/1P	36
37	*20A/1P	#12s	FIRE ALARM (IF REQ'D)	0.30	0.80			0.80	PRINTER RECEPTACLE	#12s	20A/1P	38
39	-	-	SPACE	0		0.72		0.72	PHONE EQUIP. RECEPTS.	#12s	15A/1P	40
41	-	-	SPACE	0			0.90	0.90	RECEPTACLES	#12s	20A/1P	42

TOTAL PHASE A (KVA)	TOTAL PHASE B (KVA)	TOTAL PHASE C (KVA)	TOTAL CONNECTED LOAD (KVA)	TOTAL AMPS
8.70	12.29	8.13	29.12	80.83

MISCELLANEOUS 15.39 | WATER HEATER 1.65 | TOTAL CONNECT AMPS = 230.31

E TRANSFER SWITCH SCHEDULE

POSITION	CIRCUIT BREAKER	LOAD DESCRIPTION	(KVA)	BREAKER
A	20A/1P	OFFICE COMPUTER	0.36	PLP-36
B	20A/1P	COUNTER RECEPTACLES	0.36	PLP-34
C	20A/1P	PRINTER	0.60	PLP-38
D	20A/1P	TELEPHONE EQUIPMENT RECEPTACLE	0.72	PLP-40
E	20A/1P	LIGHTING OFFICE/BATHROOMS (100% ON)	0.51	MP-1
F	20A/1P	LIGHTING SECURITY (100% ON)	0.82	MP-13
G	20A/1P	LIGHTING HARD PARTS (DIMMED TO 45% ON)	0.47	MP-3
H	20A/1P	LIGHTING HARD PARTS (DIMMED TO 45% ON)	0.69	MP-5
I	20A/1P	INSTALLER (ISOLATED GRD RECEPTACLE)	0.36	PLP-17
J	20A/1P	INSTALLER (RECEPTACLE)	0.18	PLP-19
GENERATOR (6,000 WATTS) RATED, MAX KVA=5.0 LOAD			4.97	TOTAL

NOTE:
ALL BRANCH CIRCUITS SHALL HAVE AN EQUIPMENT GROUNDING CONDUCTOR ROUTED WITH THE CIRCUIT CONDUCTORS. THIS MEANS ALL CONDUITS MUST HAVE A GREEN WIRE INSTALLED IN THEM AND SIZED IN ACCORDANCE WITH TABLE 250.122 OF THE N.E.C.

DOT-HATCH REPRESENTS CIRCUITS THAT ARE ASSOCIATED WITH OPTIONAL STANDBY GENERATOR CONTROL.

WIRING & LABELING OF EXIT & EMERGENCY LIGHT CIRCUITS

1. SEE DETAIL 1/E1 FOR WIRING OF EXIT & EMERGENCY LIGHTS ON THESE CIRCUITS.
2. ALL EXIT & EMERGENCY LIGHTING CIRCUITS SHALL BE LABELLED BY THE CONTRACTOR ON THE "PANEL DIRECTORY" (SPEC: NFPA 70 408.4 & 700.12.)

EQUIPMENT LABELS CHART

SEE ELECTRICAL SERVICE DIAGRAM.

EQUIPMENT	LABELS (ADD.): SERVICE DISCONNECT	OPTIONAL STANDBY SOURCE	GENERATOR POWER INLET	SERVICE RATING	AVAILABLE FAULT CURRENT
DISCONNECT	X	X			
GENERATOR POWER INLET			X		
MP					
PLP					
E					
CT CABINET					

GENERATOR POWER INLET LABEL

PERMANENT LABEL SHALL BE 2 x 3 IN SIZE AND SHALL BE BLUE LETTERING ON A CONTRASTING BACKGROUND. LABEL TO BE PLACED 6 INCHES ABOVE GENERATOR RECEPTACLE.

WARNING:
FOR CONNECTION OF A NONSEPARATELY DERIVED (FLOATING NEUTRAL) SYSTEM ONLY
(MAX. 6,000 WATT GENERATOR)

EXAMPLE OF LABELING ABOVE.

OPTIONAL STANDBY SOURCE LABEL

PERMANENT LABEL SHALL BE 2 x 3 IN SIZE AND SHALL BE BLUE LETTERING ON A CONTRASTING BACKGROUND. LABEL TO BE PLACED ON DISCONNECT DOOR

CAUTION
TWO SOURCES OF SUPPLY
STANDBY POWER SOURCE: PORTABLE 8kw GENERATOR
LOCATION: OVERHEAD DOOR.

EXAMPLE OF OPTIONAL STANDBY SOURCE LABELING ABOVE.

SERVICE DISCONNECT LABEL

THE SERVICE DISCONNECTING MEANS SHALL BE PROPERLY MARKED "SERVICE DISCONNECT" REFER TO SPEC SECTION 26 00 20 FOR FURTHER IDENTIFICATION PLATE REQUIREMENTS.

ELECTRIC SERVICE RESPONSIBILITIES

SEE SITE PLAN FOR UTILITY COMPANY CONTACT.

ITEM NO.	DESCRIPTION (IF APPLICABLE)	FURNISHED BY: UTILITY CO.	FURNISHED BY: CONTRACTOR	INSTALLED BY: UTILITY CO.	INSTALLED BY: CONTRACTOR
1	SERVICE LATERAL		X		X
2	SERVICE LATERAL RACEWAY		X		X
3	METER BASE	X			X
4	METER	X		X	
5	CT CABINET		X		X
6	OH SERVICE RISER @ BUILDING				
7	TRANSFORMER POLE	X		X	
8	SERVICE RISER @ POLE		X		X
9	TRANSFORMER PAD				
10	PAD MOUNT TRANSFORMER				

PORTABLE, PLUG-IN GENERATOR IS FOR NEC ARTICLE 702 OPTIONAL STANDBY LOADS FOR DISRUPTION OF BUSINESS ONLY.

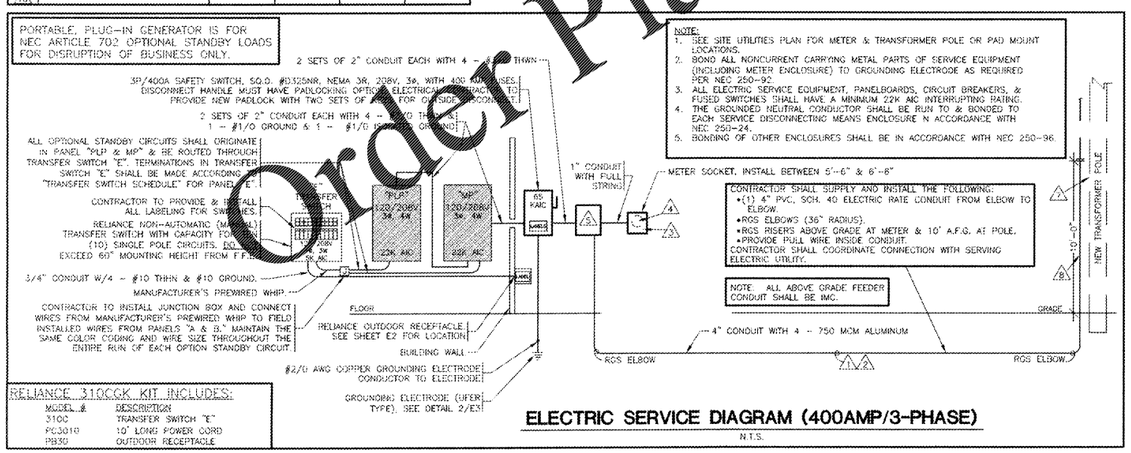

NOTE:
1. SEE SITE UTILITIES PLAN FOR METER & TRANSFORMER POLE OR PAD MOUNT LOCATIONS.
2. BOND ALL NONCURRENT CARRYING METAL PARTS OF SERVICE EQUIPMENT (INCLUDING METER ENCLOSURE) TO GROUNDING ELECTRODE AS REQUIRED PER NEC 250-92.
3. ALL ELECTRIC SERVICE EQUIPMENT, PANELBOARDS, CIRCUIT BREAKERS, & FUSED SWITCHES SHALL HAVE A MINIMUM 22K AIC INTERRUPTING RATING.
4. THE GROUNDED NEUTRAL CONDUCTOR SHALL BE RUN TO & BONDED TO EACH SERVICE DISCONNECTING MEANS ENCLOSURE N ACCORDANCE WITH NEC 250-24.
5. BONDING OF OTHER ENCLOSURES SHALL BE IN ACCORDANCE WITH NEC 250-96.

CONTRACTOR SHALL SUPPLY AND INSTALL THE FOLLOWING:
•(1) 4" PVC, SCH. 40 ELECTRIC RATE CONDUIT FROM ELBOW TO ELBOW.
•RGS ELBOWS (36" RADIUS).
•RGS RISERS ABOVE GRADE AT METER & 10' A.F.G. AT POLE.
•PROVIDE PULL WIRE INSIDE CONDUIT.
CONTRACTOR SHALL COORDINATE CONNECTION WITH SERVING ELECTRIC UTILITY.

NOTE: ALL ABOVE GRADE FEEDER CONDUIT SHALL BE IMC.

RELIANCE 310CGK KIT INCLUDES:

MODEL #	DESCRIPTION
310C	TRANSFER SWITCH "E"
PC3010	10' LONG POWER CORD
2935	OUTDOOR RECEPTACLE

ELECTRIC SERVICE DIAGRAM (400AMP/3-PHASE)

N.T.S.

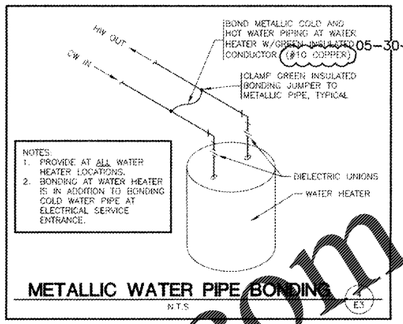

METALLIC WATER PIPE BONDING

N.T.S. (3/E3)

NOTE:
1. BOND ALL NONCURRENT CARRYING METAL PARTS OF SERVICE EQUIPMENT (INCLUDING METER ENCLOSURE) TO GROUNDING ELECTRODE AS REQUIRED PER NEC 250-92.
2. THE GROUNDED NEUTRAL CONDUCTOR SHALL BE RUN TO AND BONDED TO EACH SERVICE DISCONNECTING MEANS ENCLOSURE IN ACCORDANCE WITH NEC 250-24c.
3. BONDING OF OTHER ENCLOSURES SHALL BE IN ACCORDANCE WITH NEC 250-96.

GROUNDING & BONDING SHALL BE IN ACCORDANCE WITH: •NEC 250-24 •NEC 250-50 •NEC 250-53 •NEC 250-86 •NEC 250-90 •NEC 250-92 •NEC 250-130

BONDING REQUIREMENTS

N.T.S. (3/E3)

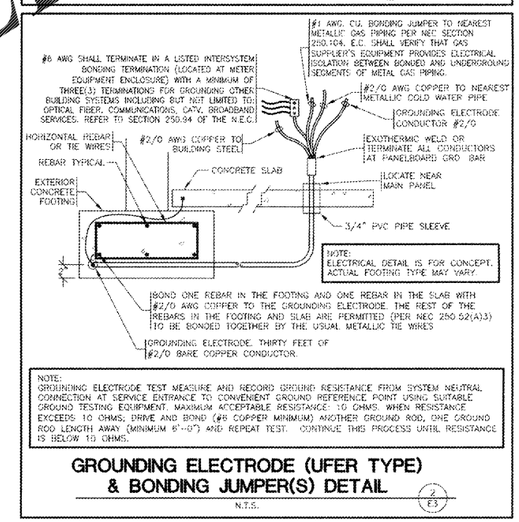

NOTE:
GROUNDING ELECTRODE TEST MEASURE AND RECORD GROUND RESISTANCE FROM SYSTEM NEUTRAL CONNECTION AT SERVICE ENTRANCE TO CONVENIENT GROUND REFERENCE POINT USING SUITABLE GROUND TESTING EQUIPMENT. MAXIMUM ACCEPTABLE RESISTANCE: 10 OHMS. WHEN RESISTANCE EXCEEDS 10 OHMS, DRIVE AND BOND (#6 COPPER MINIMUM) ANOTHER GROUND ROD, ONE GROUND ROD LENGTH AWAY (MINIMUM 6'-0") AND REPEAT TEST. CONTINUE THIS PROCESS UNTIL RESISTANCE IS BELOW 10 OHMS.

GROUNDING ELECTRODE (UFER TYPE) & BONDING JUMPER(S) DETAIL

N.T.S. (2/E3)

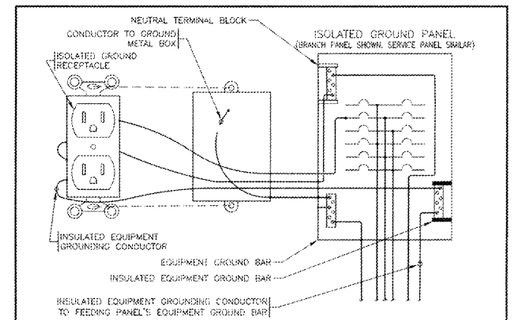

TYPICAL ISOLATED GROUND RECEPTACLE

N.T.S. (1/E3)

Order Plans @ WWW.LDILinc.com

SGE
SMITH-GOETH ENGINEERS, INC.
3855 S. JEFFERSON AVE. P: 417-882-2200
SPRINGFIELD, MO 65807 F: 417-882-1188
www.SMITHGOETH.COM

COMMONWEALTH OF VIRGINIA
CRAIG A. SCHNEIDER
Lic.No. 0402 038814
PROFESSIONAL ENGINEER
05-30-19
06/21/19

DRAWN BY: STH

CRAIG A. SCHNEIDER, AIA
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.8558
Fax: 417.862.3265
e-mail: architect@estherlyschneider.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
290 DEACON ROAD 03-25-19
FREDERICKSBURG, VA #4

ELECTRICAL SCHEDULES

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 S. PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM # 4251
DATE: 11-02-18
REVISION
DATE:
03-25-19, 05-30-19

© COPYRIGHT 2019-2020 - DESIGNS, DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF THE DESIGN PROFESSIONAL. REPRODUCTION PROHIBITED WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGN PROFESSIONAL.