



FRONT

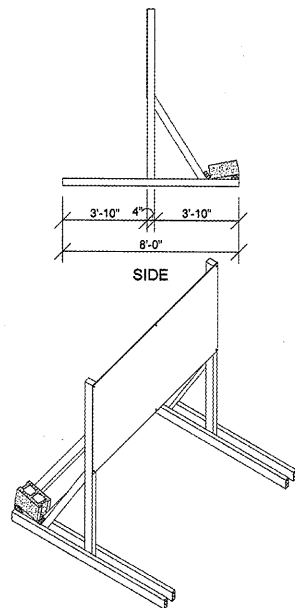


SIDE



TOP


1
COMING SOON
TEMPORARY CONSTRUCTION SIGN
SG1.2 SCALE: 1/4" = 1'-0"

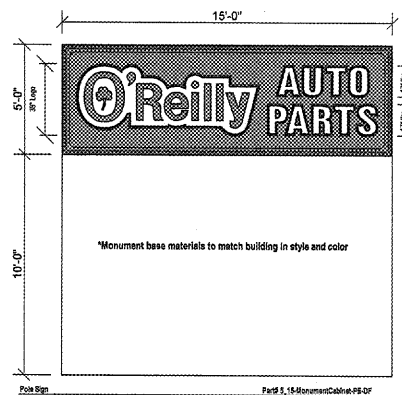


Part 1, 15' Monument Cabinet, PG 02
15.01 sq ft

- Manufacture and supply one (1) new diff illum. monument cabinet with formed and embossed faces.
- Faces are formed out of lexan with 2" draw. "O'Reilly" graphics are double embossed. "Auto Parts" copy is single embossed with painted graphics on 2nd surface. Graphics to match PMS 200c Red, PMS 342c Green, Black and White.
- 24" deep fabricated cabinet with 2 1/4" (removable) non-hinged retainers. Cabinet internally set up to receive steel pipe (pipe by others). Vertical GE (GEES1-2) White DS LED illumination, paint cabinet to: Gloss Black. Internal pipe/cabinet exposure calculation.

2
GROUND SIGN ELEVATION
SG1.2 SCALE: 1/4" = 1'-0"

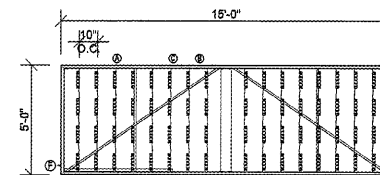

- Legend: 1/4" = 1'-0"
- 24" deep fabricated cabinet with support structure and 2 1/4" retainers
- Steel pipe provided by others, shown for reference only.
- GE Tetra PowerStrip DS White LED's, Part #GEES1-2 (1000)14 LED's per module (7 LED's per side) on GE Tetra Mounting Rails, Part #GEESRL08. Rails on 1/2" centers. 64 total modules.
- GE Tetra Power Supplies, Part #GEPE24-100U-NA 24 Volt 120-277VAC 60/50HZ. Load capacity: 16 modules per power supply. Total of four (4) per display.
- Fabricated aluminum internal power supply wireway.
- Disconnect Switch



(NTS)

GENERAL NOTES

- A REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
- B CONTACT OWNER'S OR TENANT'S DESIGNATED PROJECT ADMINISTRATOR FOR QUESTIONS OR CLARIFICATIONS.
- C PERMANENT SIGNAGE OWNER FURNISHED AND INSTALLED. (REFER TO SCOPE OF WORK SCHEDULE). SIGNAGE GRAPHICS PROVIDED FOR REFERENCE ONLY (N.I.C.) AND CONTRACTOR'S COORDINATION WITH SPECIFIC PROJECT CONSTRUCTION CONDITIONS.
- D SITE SIGN ROUGH-IN ELECTRICAL TO BE PROVIDED BY CONTRACTOR.
- E REQUIRED GOVERNMENTAL PERMITS FOR PERMANENT TYPE SIGNAGE TO BE PROVIDED BY SIGN COMPANY PER OWNER'S DIRECTION (N.I.C.).
- F "COMING SOON" TEMPORARY CONSTRUCTION SIGN TO BE PROVIDED BY GENERAL CONTRACTOR. APPLIED SIGNAGE GRAPHICS TO BE FURNISHED AND GENERAL CONTRACTOR INSTALLED. LOCATION TEMPORARY CONSTRUCTION SIGN ON SITE SO AS TO BE VISIBLE TO PUBLIC FROM RIGHT-OF-WAY.
- G UNLESS OTHERWISE INDICATED, SITE POLE SIGN FOUNDATION CONSTRUCTION BY SIGN CONTRACTOR (BY OTHERS - NOT IN CONTRACT) AND SITE MONUMENT SIGN FOUNDATION CONSTRUCTION BY GENERAL CONTRACTOR (BASE BID).

SPECIAL NOTE:
SIGN DESIGN BY OTHERS, REFER TO SIGN CONTRACTOR'S SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

SITE SIGN SCHEDULE

TEMPORARY CONSTRUCTION SIGN:
TYPE: COMING SOON
DETAIL: REFER TO 1/SG1.2

SITE SIGN:
TYPE: MONUMENT (5'H X 15'W X 15' OAH)
DETAIL: REFER TO 2/SG1.2

NOTE:
REFER TO SHEET S1.2 FOR SIGN FOUNDATION SYSTEM STRUCTURAL REQUIREMENTS.

Order Plans @ WWW.LDILine.com



CRAIG A. SCHNEIDER, AIA
ARCHITECT

417.862.8558
417.862.3265
e-mail: architect@estertyschneider.com

1736 East Sunshine, Suite 417
Springfield, Missouri 65804

PROJECT:
NEW O'REILLY AUTO PARTS STORE
290 DEACON ROAD
FREDERICKSBURG, VA #4
SITE SIGNAGE DETAILS

O'Reilly AUTO PARTS
CORPORATE OFFICES
535 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM # 4251
DATE: 11-2-18
REVISION
DATE: 3-25-19