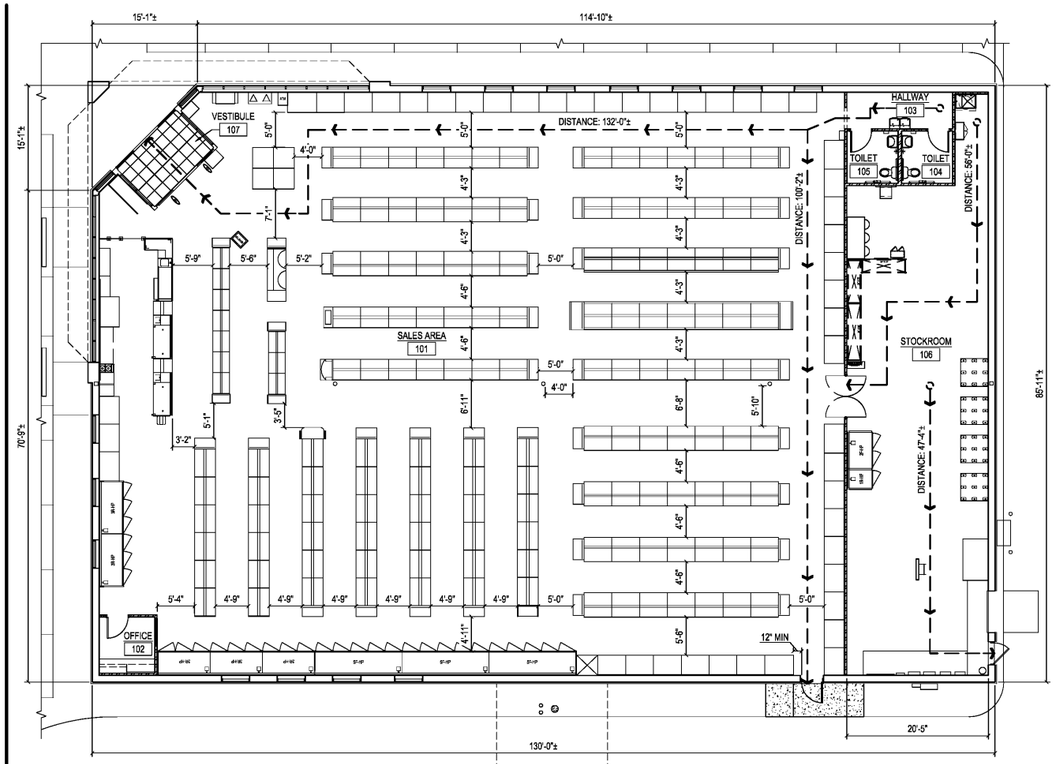

FIXTURE / EGRESS PLAN

SCALE: 1/8" = 1'-0"

PROJECT NORTH

NOTES:

1. NO GONDOLA UNITS, FIXTURES, OR PALLETS SHALL BE OVER 8'-0" AFF.
2. FIXTURE PLAN IS "FOR REFERENCE ONLY." CONTRACTOR SHALL CONTACT FAMILY DOLLAR FOR FINAL APPROVED LAYOUT.
3. MAXIMUM TRAVEL DISTANCE SHALL BE 200'-0". ACTUAL TRAVEL DISTANCE AS SHOWN: (—— ——)
4. CHECKOUTS ARE NOT ATTACHED TO FLOOR.

ALL CEMENT USED SHALL CONFORM TO THE LATEST ASTM SPECIFICATION C 150, TYPE 3. ONLY ONE (1) BRAND OF PORTLAND CEMENT SHALL BE USED IN ANY ONE STRUCTURE. CONCRETE MIXTURE SHALL BE DESIGNED TO PROVIDE A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI IN 3 DAYS.

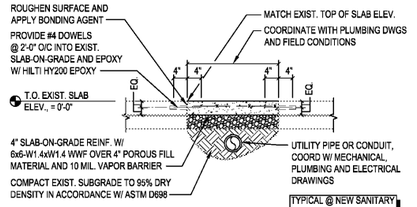

1 A1.1 SLAB IN-FILL DETAIL

SCALE: 3/4" = 1'-0"



2 A1.1 COLUMN DETAIL

SCALE: 1 1/2" = 1'-0"

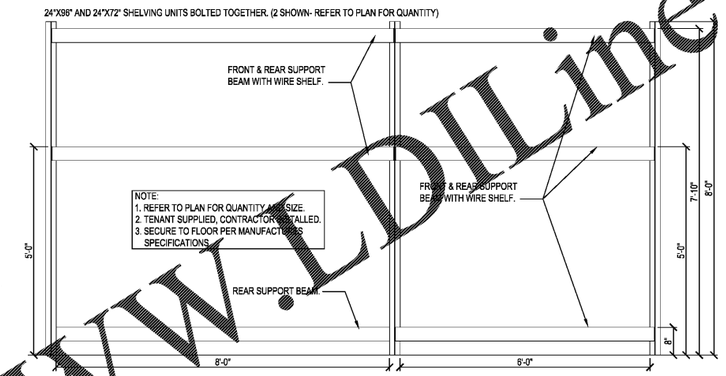

3 A1.1 SHELVING ELEVATION

SCALE: 3/4" = 1'-0"



3 A1.1 DETAIL

SCALE: 3" = 1'-0"

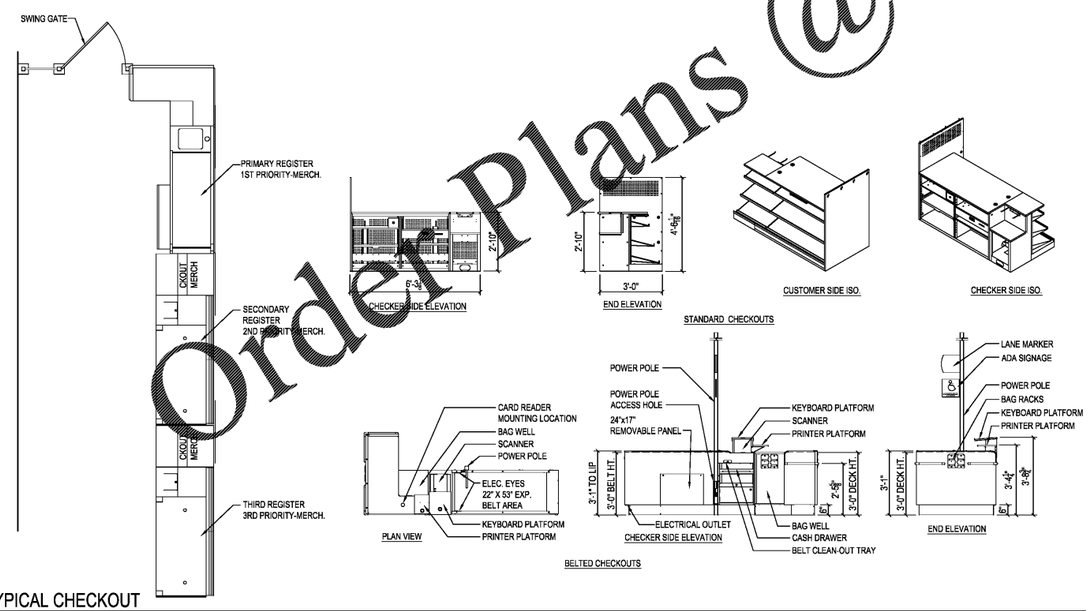

TYPICAL CHECKOUT

SCALE: NTS

NOTE:

1. CHECKOUTS AND POWER POLES ARE TENANT SUPPLIED / CONTRACTOR INSTALLED.
2. CHECKOUT AISLES SHALL COMPLY WITH 2015 INTERNATIONAL BUILDING CODE SECTION 1109.12.2 (PROVIDE 2 when 5 or more)
3. PROVIDE SIGN DISPLAYING THE INTERNATIONAL SYMBOL OF ACCESSIBILITY IN BLUE AND WHITE ABOVE EACH CHECKOUT AISLE IN THE SAME LOCATION AS THE CHECKOUT NUMBER OR TYPE OF CHECKOUT IDENTIFICATION.

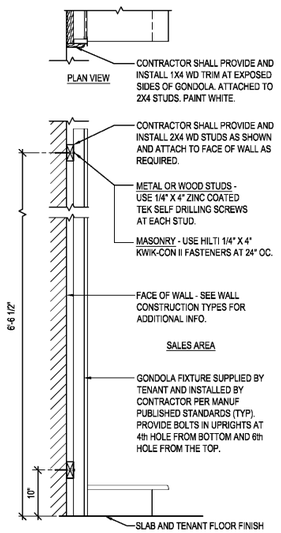

TYPICAL FIXTURE ATTACHMENT DETAIL

SCALE: 1" = 1'-0"

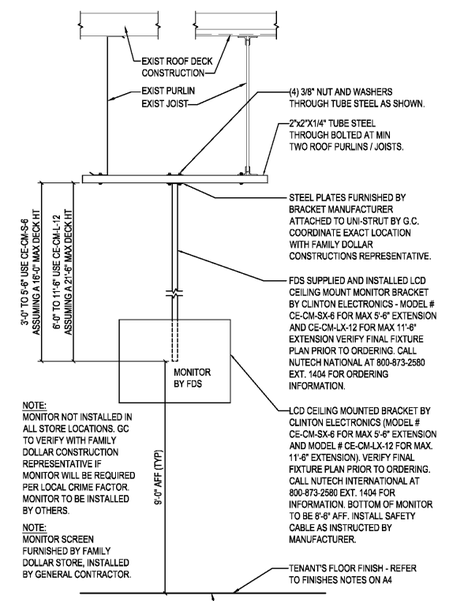

4 A1.1 MONITOR DETAIL

SCALE: 1" = 1'-0"

Order Plans @ WWW.LDILine.com

mark	date	by	description

date	02/02/22
project	20106-13
designed	CDC
drawn	TEH
checked	DAE

RRMM ARCHITECTS, PC
Donna A Elliott, Architect 5613
Robert S Berz Jr, Architect 7810
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2628 / fax (757)622-6883

project: FAMILY DOLLAR STORE, FDS #791901
SELMA, AL

drawing: FIXTURE / EGRESS PLAN, DETAILS, AND ELEVATIONS

sheet: A1.1