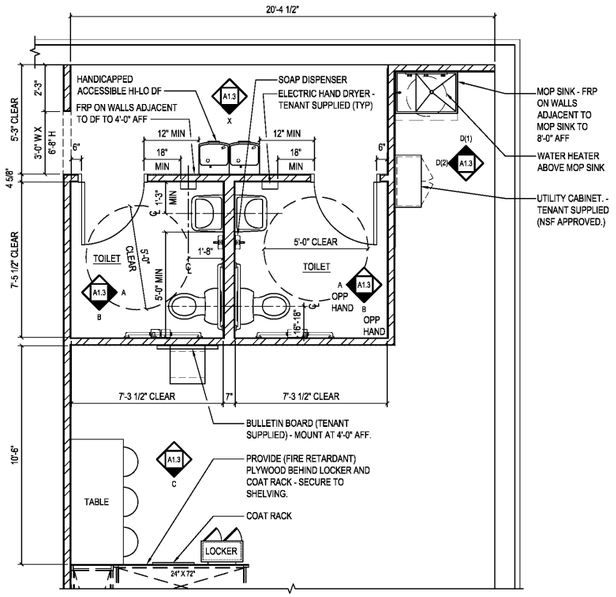

1 A1.3 ENLARGED PLAN
SCALE: 3/8" = 1'-0"

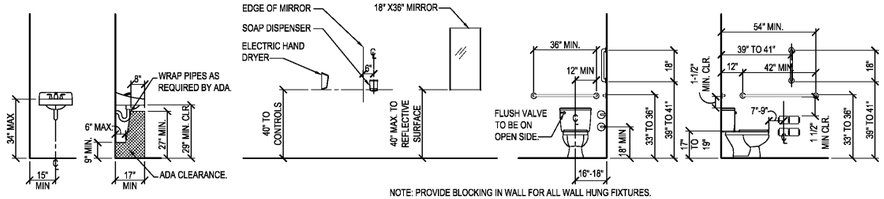

NOTE: PROVIDE BLOCKING IN WALL FOR ALL WALL HUNG FIXTURES.

TYPICAL ACCESSIBILITY CLEARANCES
SCALE: 3/8" = 1'-0"

GENERAL REST ROOM NOTES:

1. LAYOUT OF TOILET ROOM FACILITIES SHALL COMPLY WITH ALL APPLICABLE STATE AND LOCAL CODES, INCLUDING ALL ADA REQUIREMENTS. SUBMIT ANY MODIFIED LAYOUTS TO FAMILY DOLLAR FOR THEIR REVIEW AND APPROVAL.
2. TOILET ACCESSORIES ARE SUPPLIED BY TENANT AND INCLUDE THE FOLLOWING ACCESSORIES FOR EACH TOILET:
   - 18"X36" WALL MIRROR WITH CONCEALED MOUNTING CENTERED OVER EACH LAVATORY. INSTALL W/ BASE OF REFLECTIVE SURFACE @ 40" A.F.F. PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - DUAL ROLL TOILET TISSUE DISPENSER, 18 GA. CHROME PLATED STEEL OR APPROVED EQUAL. INSTALL PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - STN. STL. COAT HOOK MOUNTED TO DOOR FACE OR APPROVED DUAL WALL HOOK @ 4'-3" A.F.F. MAX.
   - 1 1/4" ~ x 36" & 42" & 18" STN. STL. CODE APPROVED GRAB BARS MOUNTED TO WALL. INSTALL GRAB BARS PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - PROVIDE JUNCTION BOX PER ELECTRICAL DRWGS. FOR TENANT SUPPLIED AND INSTALLED HAND DRYER.
   - SOAP DISPENSER MOUNTED PER REQUIREMENTS SHOWN ON THIS SHEET.
   - CODE APPROVED IDENTIFICATION SIGN INSTALLED ADJACENT TO STRIKE JAMB/LATCH SIDE OF DOOR W/ HOR. CONTACT CENTER @ 60" A.F.F.
3. INSTALL CONTINUOUS FIRE RETARDANT TREATED 2x6 BLOCKING BETWEEN STUDS FOR ALL HANDRAILS, GRAB BARS, FIXTURES, BRACKETS, ACCESSORIES, CABINETRY, AND MISC. SPECIALTIES AS REQUIRED, UNLESS NOTED OTHERWISE.
4. USE 5/8" MOISTURE RESISTANT G.W.B. (GREENBOARD) FOR TOILET ROOM WALLS.
   - DOOR HARDWARE MUST BE MOUNTED BETWEEN 34 (MIN.) & 48 INCHES (MAX.)
6. FLUSH CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET.

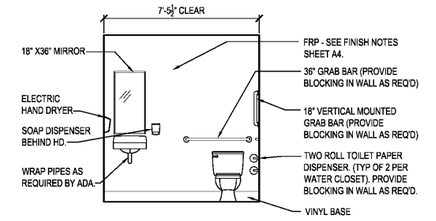

A A1.3 TOILET ELEVATION
SCALE: 3/8" = 1'-0"



B A1.3 TOILET ELEVATION
SCALE: 3/8" = 1'-0"

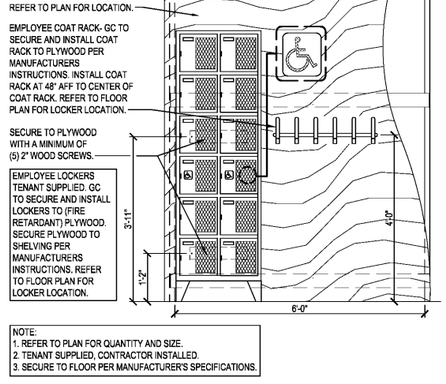

NOTE:
1. REFER TO PLAN FOR QUANTITY AND SIZE.
2. TENANT SUPPLIED, CONTRACTOR INSTALLED.
3. SECURE TO FLOOR PER MANUFACTURER'S SPECIFICATIONS.

C A1.3 SHELVING, LOCKER, AND COAT RACK ELEVATION
SCALE: 3/4" = 1'-0"

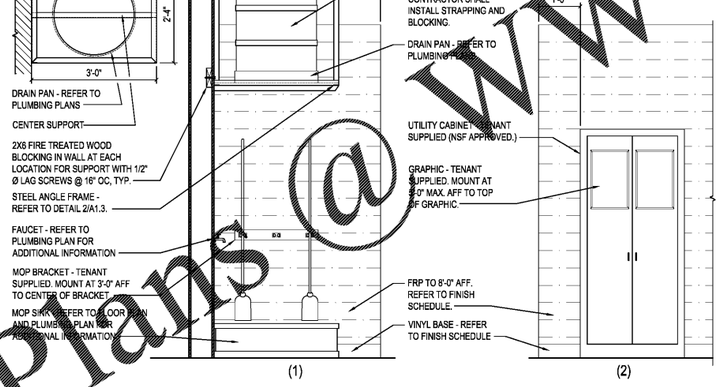

2 A1.3 MOP SINK AND UTILITY CABINET ELEVATION
SCALE: 3/4" = 1'-0"

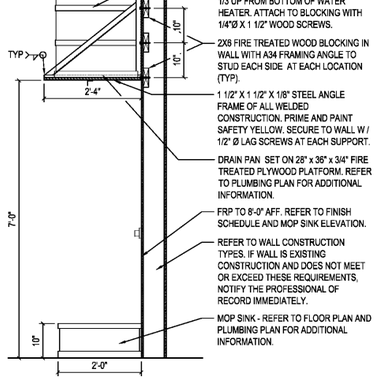

2 A1.3 WATER HEATER MOUNTING DETAIL
SCALE: 3/4" = 1'-0"

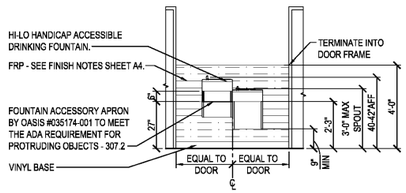

E A1.3 DRINKING FOUNTAIN ELEVATION
SCALE: 3/8" = 1'-0"

Order Plans @ WWW.LDILine.com

mark	date	by	description
			revisions

date	03/02/22
project	20106-13
designed	CCC
drawn	TEH
checked	DAE

RRMM ARCHITECTS, PC
Donna A Elliott, Architect 5613
Robert S Berz Jr, Architect 7810
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2628 / fax (757)622-6883

project
FAMILY DOLLAR STORE, FDS #791901
SELMA, AL

drawing
ENLARGED PLAN, DETAILS, SECTIONS, AND ELEVATIONS

sheet
A1.3