

4 ADA SINK BASE
A8.0 SCALE: 3/4" = 1'-0"



3 CASEWORK ELEVATION AT WORKROOM
A8.0 SCALE: 3/8" = 1'-0"

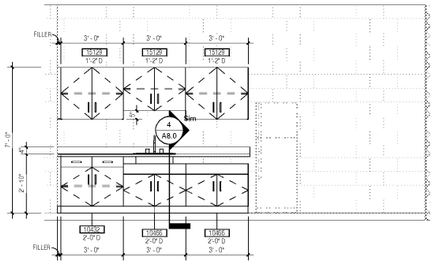

2 CASEWORK ELEVATION AT WORKROOM
A8.0 SCALE: 3/8" = 1'-0"

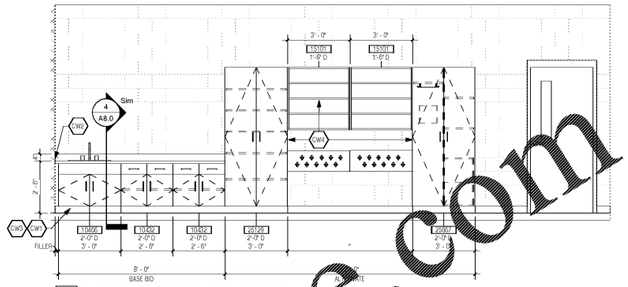

1 CASEWORK ELEVATION AT CLASSROOM
A8.0 SCALE: 3/8" = 1'-0"

CASEWORK LEGEND

GENERAL NOTES

A. CASEWORK MODEL NUMBERS ARE BASED ON **STEVENS CASEWORK** AND ARE INTENDED TO DEFINE TYPE, FUNCTION, SIZE AND FEATURE.
B. ALL **BASE CABINETS** SHALL BE 2'-10" HIGH, UNLESS NOTED OTHERWISE.
C. ALL **WALL CABINETS** SHALL BE INSTALLED AT 7'-0" A.F.F. TO TOP OF CABINET, AND SHALL BE 30 INCHES TALL, UNLESS NOTED OTHERWISE.
D. PROVIDE ADEQUATE SUPPORTS FOR ALL COUNTERTOPS. SUBMIT COUNTERTOP SUPPORT DETAILS ALONG WITH SHOP DRAWING FABRICATION DETAILS.
E. PROVIDE **GROMMETS** IN COUNTERTOPS WHEREVER KNEESPACE IS INDICATED IN ELEVATION. (TYPICALLY 3'-0" O.C.)
F. PROVIDE **4 INCH** HIGH BACKSPLASHES OR SIDESPLASHES WHERE COUNTERTOPS MEET ADJACENT WALLS ON CASEWORK (EVEN IN DRY CONDITIONS), UNLESS NOTED OTHERWISE.
G. PROVIDE **8 INCH** HIGH BACKSPLASHES TO MEET THE INSTALLED HEIGHT OF STANDARD BACKSPLASHES WHEREVER A 2 INCH DROP IN COUNTERTOP OCCURS.
H. PROVIDE SIDESPLASH ALONG COUNTERTOP WHERE 34 INCH HIGH COUNTERTOPS MEET 36 INCH HIGH BACKSPLASHES.
I. PROVIDE **FILLER PANELS** AS NEEDED AT ALL WALLS AND ADJACENT TO BASE AND WALL CABINETS OR WHERE INDICATED IN ELEVATIONS. FILLERS TO BE THE SAME COLOR AS ADJACENT BASE OR WALL CABINET FACE.
J. ALL **EXPOSED PLYWOOD** SURFACES SHALL BE **FINISHED** WITH PLASTIC LAMINATE.
K. AN **'M'** DESIGNATION AT TOP A MODEL NUMBER INDICATES MOBILE UNIT, TO BE PROVIDED ON CASTERS WITH BASE PANEL TO HIDE CASTER.
L. **PROVIDE LOCKS ON ALL CABINET DOORS, FILE CABINETS AND DRAWERS. ALL LOCKS SHALL BE KEYED THE SAME.**

DRAWING NOTES

CW1	RESILIENT BASE, TYPICAL
CW2	BACKSPLASH & SIDESPLASH, TYPICAL
CW3	INTEGRATED TOE KICK, PROVIDE EITHER METAL OR PLASTIC LAMINATE SURFACE. TO MATCH ARCHITECT TO SELECT COLOR.
CW4	BACKSPLASH & SIDESPLASH, TYPICAL

SYMBOLS LEGEND

MODEL NO
MODEL — CASEWORK TAG
D — DEPTH
CW# — DRAWING NOTES (ABOVE)

Order Plans @ WWW.LDILine.com

BXA
Breaux & Associates
ARCHITECTS
5955 Sitton Road East, Suite 200
Alpharetta, Georgia 30005 | (678) 585-4508

STATE OF GEORGIA
DOUGLAS P. BREAUX
CERTIFICATE NO. 015674
REGISTERED ARCHITECT

03/06/2020

NO	DESCRIPTION	DATE

RUSSOM ELEMENTARY SCHOOL ADDITION
44 RUSSOM ELEMENTARY SCHOOL LANE
DALLAS, GA 30132
(FACILITY CODE: 710-0204)

PAULDING COUNTY SCHOOLS

MANUFACTURED CASEWORK

DATE 03/06/2020
PROJECT NO. 19117

A8.0

(6472 SF (EXISTING AREA) + 22878 SF (NEW AREA) = 127250 SF (TOTAL AREA); 850 F.T.E. (EXISTING) + 275 F.T.E. (NEW) = 1125 F.T.E. (TOTAL); 54 I.U. (EXISTING) + 17 I.U. (NEW) = 71 I.U. (TOTAL)

3/16/2020 11:07:16 AM