CLASSROOM ADDITION TO :

CREEKSIDE MIDDLE SCHOOL

8403 GA HWY 315
CATAULA, GEORGIA

FOR:

HARRIS COUNTY SCHOOL DISTRICT

132 BARNES MILL ROAD
HAMILTON, GEORGIA 31811

JOB #: 01-632-056

DATE: FEB. 4, 2020

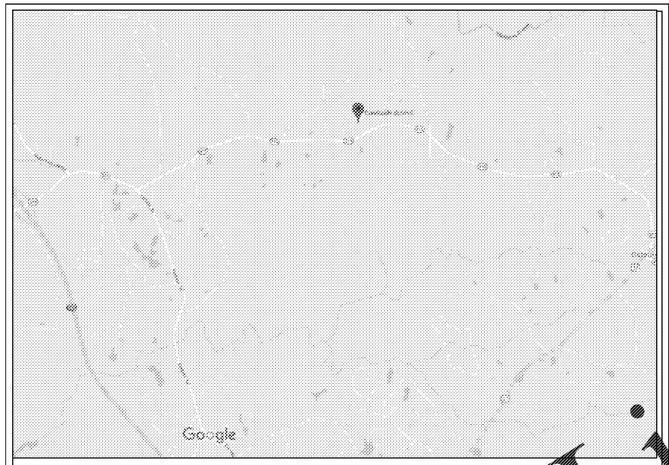

LOCATION MAP - NO SCALE

WARNING: Contractors, subcontractors, vendors and suppliers are advised that the Contract Documents consist of Drawings, Specifications, Addenda, Post-Bid Addenda and Change Orders that have been printed, bound and numbered by the Architect. Any documents reproduced by parties other than the Architect, whether hard copy or electronic format, shall not be considered part of the Contract Documents and do not supercede the provisions of the Contract Documents. Contractors, subcontractors, vendors and suppliers are solely responsible for verifying that information used for bidding, development of shop drawings and construction of the facility are identical to the Architect's Contract Documents.

LIST OF DRAWINGS

C000 COVER SHEET
C101 EXISTING CONDITIONS & DEMOLITION PLAN
C102 STAKING & GRADING PLAN
C103 DOWNSPOUT PIPING PLAN

C206 PHASE I (INITIAL) EROSION, SEDIMENTATION & POLLUTION CONTROL PLAN
C207 PHASE II (INTERMEDIATE) EROSION, SEDIMENTATION & POLLUTION CONTROL PLAN
C208 PHASE III (FINAL) EROSION, SEDIMENTATION & POLLUTION CONTROL PLAN

C301 EROSION, SEDIMENTATION & POLLUTION CONTROL DETAILS
C302 EROSION, SEDIMENTATION & POLLUTION CONTROL DETAILS

CERTIFIED PERSON:
PATRICK HALLAHAN
LEVEL II CERTIFIED
DESIGN PROFESSIONAL
CERTIFICATION #:
0000066587
ISSUED: 07/06/2018
EXPIRES: 07/06/2021

FLOODPLAIN STATEMENT:
AS PER FEMA FIRM NUMBER
13145 C 0195 C DATED JULY 3, 2007
THIS PROJECT IS NOT LOCATED IN
THE 100-YEAR FLOODPLAIN.
NO WORK PROPOSED BY THIS PROJECT
WILL IMPACT OR OCCUR WITHIN THE
100-YEAR FLOOD PLAIN.

OWNER:
HARRIS COUNTY BOARD OF EDUCATION
132 BARNES MILL ROAD
HAMILTON, GA 31811
706-628-4206 (phone)

STATE WATERS STATEMENT:
THERE ARE NO STATE WATERS LOCATED ON, OR WITHIN 200-FT OF THIS PROJECT.

NO WORK PROPOSED BY THIS PROJECT WILL IMPACT ANY STATEWATER OR OCCUR WITHIN ANY STATEWATER BUFFER.

GPS LOCATION:
32.67400 N Latitude
-84.918600 W Longitude

(CONSTRUCTION ENTRANCE)

SOILS INFORMATION:
HdB - Hard Labor-Appling complex, 2 to 16% slopes.
HdC2 - Hard Labor-Appling complex, 6 to 10% slopes, moderately eroded.
PaD2 - Pacolet sand loam, 10 to 15% slopes, moderately eroded.

SOILS DELINEATION:
SEE SHEET C101 FOR DELINEATION.

SITE ADDRESS:
CREEKSIDE MIDDLE
SCHOOL ADDITION
8403 GA HWY 315
CATAULA, GA 31804

SITE DATA:
TOTAL PROPERTY ACRES: 90.74
ACRES DISTURBED: 0.75
LAND LOT: 41
DISTRICT: 19
CURRENT SITE USE: SCHOOL
PROPOSED SITE USE: SCHOOL
SURROUNDING LAND USE: RURAL

24-HOUR CONTACT:
SUPERINTENDENT
ROGER COUCH
HARRIS COUNTY SCHOOL DISTRICT
132 BARNES MILL ROAD
HAMILTON, GA 31811

770-555-1234 (office)
couch-r@harris.k12.ga.us(email)

WETLANDS STATEMENT:
-THERE ARE NO WETLAND AREAS LOCATED ON THIS SITE.
-NO WORK PROPOSED BY THIS PROJECT
WILL IMPACT OR OCCUR WITHIN ANY JURISDICTIONAL WETLANDS.

Southern A&E LLC
7951 Troon Circle
Austell, Ga. 30168
(770) 819-7777
architects & engineers

© COPYRIGHT 2020 BY SOUTHERN A&E, LLC. ALL RIGHTS RESERVED.
THIS DOCUMENT IS THE PROPERTY OF SOUTHERN A&E, LLC AND
SHALL NOT BE COPIED OR REPRODUCED IN WHOLE OR PART
WITHOUT EXPRESSED WRITTEN CONSENT FROM SOUTHERN A&E, LLC.

Order Plans @ www.DLine.com

SEDIMENT CONTROL NOTES:

1. "I UNDERSTAND THAT AS THE PLAN PREPARER, RETAINED BY THE PRIMARY PERMITTEE, I MUST VISIT THE SITE TO INSPECT THE INSTALLATION OF THE INITIAL SEDIMENT STORAGE REQUIREMENTS AND PERIMETER CONTROL BMPs WITHIN SEVEN (7) DAYS AFTER INSTALLATION.

   SIGNATURE OF PLAN PREPARER: _____ DATE: FEB. 4, 2020
   PATRICK HALLAHAN

   "WHEN THE SITE IS STABILIZED AND AT THE DIRECTION OF THE LOCAL ISSUING AUTHORITY, THE DEVELOPER IS TO REMOVE THE SEDIMENT BASINS AND STABILIZE THE DISTURBED AREAS."
2. "THE ESCAPE OF SEDIMENT FROM THE SITE SHALL BE PREVENTED BY THE INSTALLATION OF EROSION CONTROL MEASURES AND PRACTICES PRIOR TO, OR CONCURRENT WITH, LAND-DISTURBING ACTIVITIES. EROSION CONTROL MEASURES WILL BE MAINTAINED AT ALL TIMES AND THE INSPECTIONS AND REPAIRS WILL BE MADE BY:

   NAME: _____ ADDRESS: _____

   PHONE (24 HR.):

   IF FULL IMPLEMENTATION OF THE APPROVED PLANS DOES NOT PROVIDE FOR EFFECTIVE EROSION CONTROL, ADDITIONAL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IMPLEMENTED TO CONTROL OR TREAT THE SEDIMENT SOURCE."

AS-BUILT SURVEY REQUIREMENTS:
PROVIDE THE FOLLOWING RECORD DRAWINGS IN dwg FORMAT:

1. AS-BUILT EROSION CONTROL SURVEY: ON COMPLETION OF ALL DETENTION PONDS, ENGAGE A PROFESSIONAL LAND SURVEYOR TO PROVIDE A GROUND-RUN AS BUILT SURVEY.
2. FINAL AS-BUILT SURVEY: ON COMPLETION OF PROJECT, ENGAGE A PROFESSIONAL LAND SURVEYOR TO PROVIDE A GROUND-RUN AS BUILT SURVEY

**********SEE SPECIFICATION SECTION: 017839-PROJECT RECORD DOCUMENTS FOR THE MINIMUM REQUIREMENTS. **********

CAUTION:

THE UTILITIES SHOWN ARE SHOWN FOR THE CONTRACTORS CONVENIENCE ONLY. OTHER UTILITIES MAY BE PRESENT BUT NOT SHOWN ON THESE DRAWINGS. THE ARCHITECT & ENGINEER ASSUME NO RESPONSIBILITY FOR THE UTILITY LOCATIONS SHOWN, AND IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT LOCATIONS OF ALL UTILITIES WITHIN THE LIMITS OF THE WORK. ALL DAMAGE MADE TO THE EXISTING UTILITIES BY THE CONTRACTOR SHALL BE REPAIRED TO A "LIKE NEW" CONDITION. THE CONTRACTOR SHALL BEAR THE SOLE RESPONSIBILITY FOR ANY LASSES THAT OCCUR FROM DAMAGES TO THE EXISTING UTILITIES.

811
Know what's **below.**
Call before you dig.
Dial 811.
GEORGIA
811 Utilities Protection Center, Inc.
Safe digging is a SHARED responsibility, and in Georgia it's the law.
811 or 1-800-282-7411
www.Georgia811.com

DRAWING REVISIONS

☐ = CHANGE ORDER △ = ADDENDUM

DATE	REVISION #	DESCRIPTION
FEB. 13, 2020	1	ADDENDUM DRAWINGS

DRAWING NUMBER
C000
COVER SHEET

SAE PROJECT NUMBER 01-632-056

PROJECT NAME: CREEKSIDE SCHOOL