



ITEM	GRADE LEVEL										HC ACCESSIBILITY
	Pre-K	K	1	2	3	4	5	6	7	8-12/Adult	
CHALK & TACKBOARDS	21"	24"	24"	25"	26"	27"	28"	29"	31"	33"	Bottom of board above finish floor
WORKING COUNTERS (d)	30"	30"	30"	30"	30"	30"	30"	30"	30"	34"	Installed height
COUNTER SINKS (d)	30"	30"	30"	30"	30"	30"	30"	30"	30"	34"	Installed rim mount height
HANGING RODS	36"	40"	40"	40"	40"	44"	44"	44"	44"	48"	Top of hang rod above finish floor
DRINKING FOUNTAINS	27" ^(a)	27" ^(a)	27" ^(a)	27" ^(a)	30"	30"	30"	30"	30"	36"	Typ. spout height/H.C. spout height
WATER CLOSETS (a)	15" ^(b)	15" ^(b)	15" ^(b)	15" ^(b)	15" ^(b)	15"	15"	15"	15"	15"	Typ. seat height/H.C. seat height
WATER CLOSET FLUSH CONTROLS (e)	21.5" ^(b)	21.5" ^(b)	21.5" ^(b)	21.5" ^(b)	21.5" ^(b)	21.5"	21.5"	21.5"	21.5"	21.5"	Typ. flush cont./H.C. flush cont.
LAVATORIES (a)	24" ^(No Shrouds)	24" ^(No Shrouds)	28" ^(b)	28" ^(b)	28" ^(b)	28" ^(b)	28" ^(b)	31"	31"	31"	Typ. rim height/H.C. rim height
MIRRORS	5'-8" TOP	6'-0" TO TOP				6'-4" TO TOP					Within maximum h.c. bottom edge height
URINALS	16" ^(a)	17" ^(a)	15"			17"		24" ^(a)	17"	17"	Typ. rim height/H.C. rim height
URINAL FLUSH CONTROLS	43" ^(a)	36" ^(a)	44"			44"		51"			Typ. cl. flush cont./H.C. cl. flush cont.
GRAB BARS TOILETS (c)	20"	25" (1.25" dia)								36"	Centerline of bar above finish floor
TISSUE DISPENSER	14"	17"								19"	Centerline of disp. above finish floor
TOWEL DISPENSER	36"	40"								48"	Centerline of slot above finish floor
SOAP DISPENSER	36"									40"	Centerline of spout above finish floor
HAND DRYER	36"	40"				44"				48"	Centerline of button above finish floor
HAND RAILS											Top of handrail above finish floor
FIRE EXTINGUISHER											Installed height
ROOM SIGN											Mounted on wall @ latch side of door
LOWER SEAT	12"	15"	15"	15"	15"	15"	15"	15"	15"	18"	Typ. seat height is also accessible
SPRINKLER CONTROLS										43"	Centerline control area a.f.f.

TABLE - MOUNTING HEIGHTS
1" = 1"

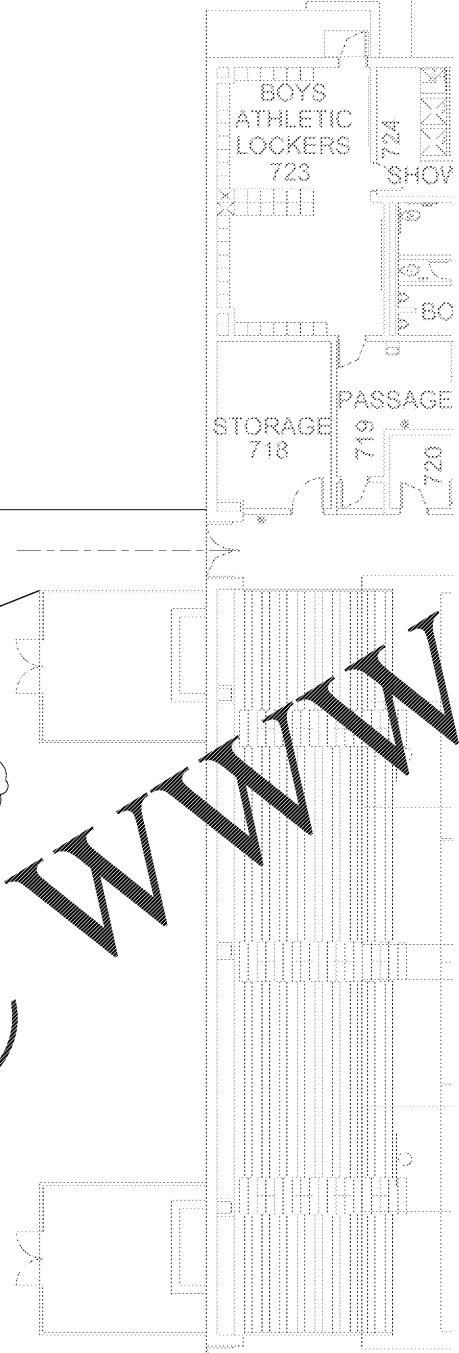

Order Plans @

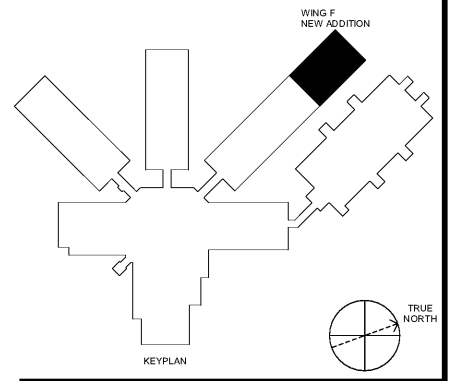

NOTES & LEGEND TO FLOOR PLANS	
1	Refer to Cover Sheet for Keynote List.
2	Refer to Reflected Ceiling Plan for wall ratings and additional information on walls.
3	Refer to Drawing A401 for Enlarged Plans of all Toilets and additional dimensions of these areas.
4	Refer to Mechanical Drawings for location and opening requirements for all Thru-wall and Wall-Hung Heat Pumps. See also details on Drawing A301.
5	All doors shown without door number are existing to remain.
6	Refer to Civil Drawings for complete sidewalk layout.
7	Refer to Drawing A103 for Interior Floor Pattern

	New Concrete Block Walls. Dimension from face of wall to face of wall.	TCS	Teacher's Storage. See 7/A501
	New Stud Walls. Dimensions to center line.	N.I.C.	Not in Contract
	Existing Walls to remain.	F.E.	Semi-Recessed Fire Extinguisher See 10.44.16 and Detail 4/A201
	Room Number See Finish Schedule		
	New Door Number See Door and Frame Schedule		
	New Window Number See Drawing A502 for elevations		NOTE: Post Mounted Door Bumper Not Shown on Floor Plans. Refer to Door Schedule for location of bollards. For detail refer to 1/A301
	Steel Columns Line and / or Steel Frame Line Center of Steel Column and / or Steel Frame		

FLOOR PLAN LEGEND
1" = 1"

SA&E PROJECT NUMBER	01-632-056
BID PACKAGE	BP-1
ISSUED FOR CONSTRUCTION	FEB. 4, 2020
Southern AE	
7951 Troon Circle Austell, Ga 30168 (770) 519-7777	REVISIONS R # Doc # Date 1 AD01 02/13/2020
FACILITY CODE NUMBER: 672-0109	
(6) CLASSROOM ADDITION TO: CREEKSIDE MIDDLE SCHOOL CATAULA, GEORGIA	
HARRIS COUNTY BOARD OF EDUCATION HAMILTON, GEORGIA	
FLOOR PLAN	
	DRAWING NUMBER A102