TYPICAL BLL INSTALL DETAIL

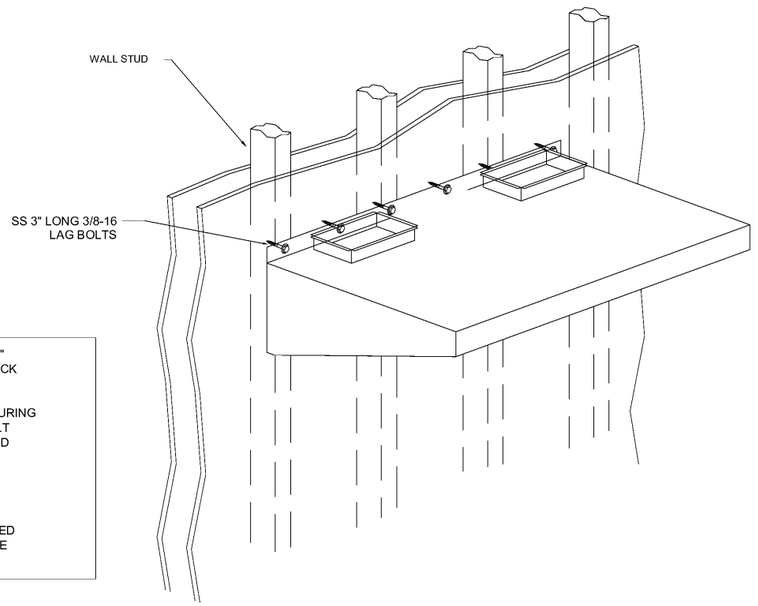

BOLTS SHOULD BE INSTALLED IN 1" VERTICAL FLANGE ON THE TOP BACK OF THE HOOD.

INSTALL A BOLT EVERY FOOT ENSURING THAT AT LEAST EVERY OTHER BOLT THREADS SOLIDLY INTO WALL STUD

USE LAG BOLT SIMILAR TO McMASTER CARR 90123A383

DUCT SUPPORT IS BY OTHERS AS DUCTWORK SHOULD BE SUPPORTED FROM CEILING OR WALLS WITH THE USE OF HANGING STRAPS

GREASE BOX INSTALLATION

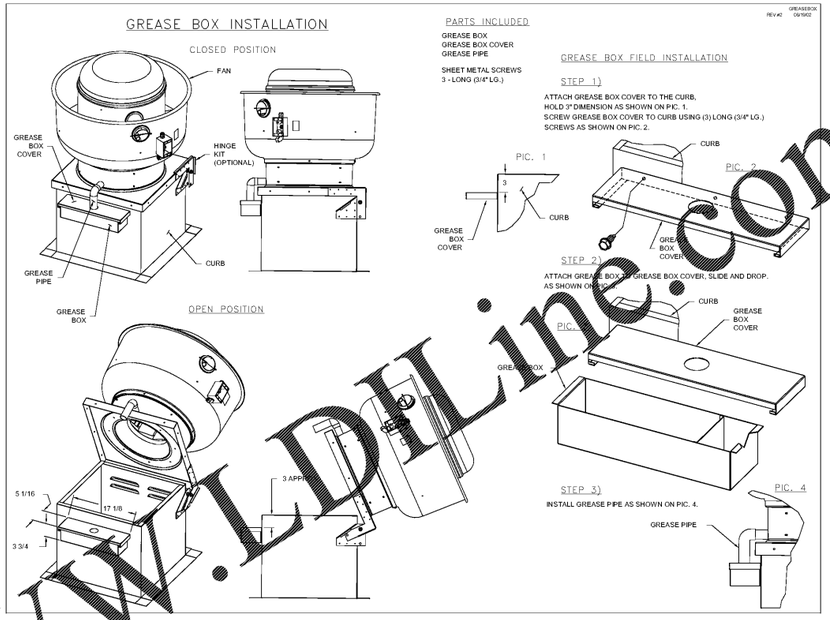

PARTS INCLUDED

GREASE BOX
GREASE BOX COVER
GREASE PIPE

SHEET METAL SCREWS
5 - LONG (3/4" LG.)

GREASE BOX FIELD INSTALLATION

STEP 1)

ATTACH GREASE BOX COVER TO THE CURB, HOLD 3" DIMENSION AS SHOWN ON PIC. 1. SCREW GREASE BOX COVER TO CURB USING (3) LONG (3/4" LG.) SCREWS AS SHOWN ON PIC. 2.

STEP 2)

ATTACH GREASE BOX TO GREASE BOX COVER, SLIDE AND DROP. AS SHOWN ON PIC. 3.

STEP 3)

INSTALL GREASE PIPE AS SHOWN ON PIC. 4.

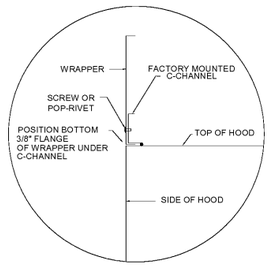

ENCLOSURE DETAIL

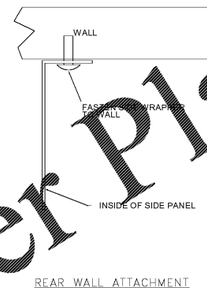

REAR WALL ATTACHMENT

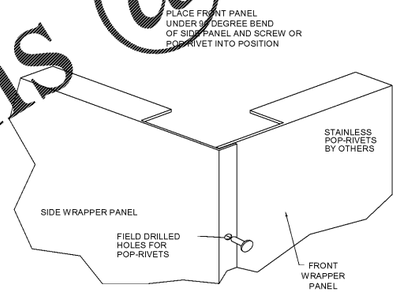

FRONT CORNER ASSEMBLY

BACKSPLASH

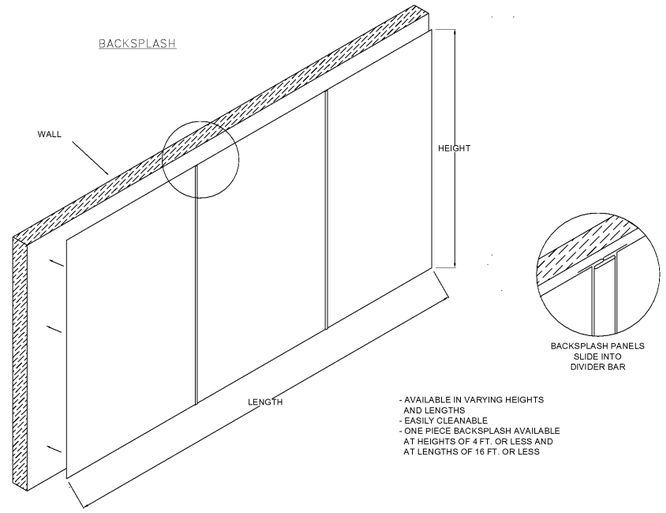

- AVAILABLE IN VARYING HEIGHTS AND LENGTHS
- EASILY CLEANABLE
- ONE PIECE BACKSPLASH AVAILABLE AT HEIGHTS OF 4 FT. OR LESS AND AT LENGTHS OF 16 FT. OR LESS

1 / M4 CAPTIVEAIRE DETAILS

3/8" = 1'-0"

Order Plans @ www.LDLine.com

FRCH NELSON
A NELSON BRAND
311 Elm Street Suite 600
Cincinnati OH 45202
513 241 3000
www.frchnelson.com

LOUISIANA KITCHEN
POPEYES

JPL MANAGEMENT

ISSUE INFORMATION

REVISIONS

Nelco Architecture, Inc.

JOHNNY J. QUILLEN 30529 LICENSED PROFESSIONAL ENGINEER STATE OF KENTUCKY

05/08/2020

PROJECT INFORMATION

BOWLING GREEN, KY

DISHMAN LANE
BOWLING GREEN, KY 42101

PROJECT #:
11352

SHEET INFORMATION

HOOD DETAILS

DRAWN BY:
ED/ZF/BD

REVIEWED BY:
JJG/JWQ

SCALE:
3/8" = 1'-0"

AUTHORIZED FOR:
PERMIT

M4

The drawing, printed or otherwise, is the copyrighted property of Nelco Architecture, Inc. The drawing may not be used, reproduced or copied without the permission of Nelco Architecture, Inc.

5/12/2020 12:24:26 PM C:\Users\edduffy\Documents\11352 - Popeyes - Bowling Green KY_eduffyQFFAU.rvt