




A: 413 SPEARS AVENUE
CHATTANOOGA, TN 37405
P: 423.521.7622

BERRY ENGINEERS LLC
CIVIL ENGINEER
3555 KEITH ST. NW, SUITE 109
CLEVELAND, TN 37312
TEL: (423) 790-8880
CERTIFICATE OF AUTHORIZATION #03885

BELTERRA PARTNERS
728 SHADES CREEK PKWY
SUITE 130
BIRMINGHAM, AL 35209

O'REILLY AUTO PARTS
SW HWY 484
OCALA, FL



REVISIONS	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	

SHEET NAME:
LANDSCAPE DETAILS

DATE: 5/04/2020

DRAWN BY: KEP

CHECKED BY: GLC

PROJECT NO.: 19078





SHEET NUMBER:
L-02

STAKING:





- STAKE ONLY IN AREAS OF HIGH WIND OR AS REQUIRED.
- STAKING OPTIONAL OR BY CITY ORDINANCE.
- ALL STAKES SHALL BE DRIVEN OUTSIDE THE EDGE OF THE ROOT BALL.
- THE TREES THAT HAVE GROWN TOO CLOSE TOGETHER IN THE NURSERY, RESULTING IN WEAK TRUNKS, REJECT RATHER THAN STAKE.
- ASSURE THAT THE BEARING SURFACE OF THE PROTECTIVE COVERING OF THE WIRE OR CABLE AGAINST THE TREE TRUNK IS A MINIMUM OF 12 MM (0.5").
- REMOVE ALL STAKING AS SOON AS THE TREE HAS GROWN SUFFICIENT ROOTS TO OVERCOME THE PROBLEM THAT REQUIRED THE TREE TO BE STAKED. STAKES SHALL BE REMOVED NO LATER THE END OF THE FIRST GROWING SEASON AFTER PLANTING.

TREES NORMALLY DO NOT NEED TO BE STAKED, AND STAKING CAN BE HARMFUL TO THE TREE. STAKING SHOULD BE DONE ONLY WITH THE APPROVAL OF THE LANDSCAPE ARCHITECT IF IT IS EXPECTED THAT THE TREE WILL NOT BE ABLE TO SUPPORT ITSELF. THE FOLLOWING ARE REASONS WHY TREES DO NOT REMAIN STRAIGHT:

- TREES WITH POOR-QUALITY ROOT BALLS OR ROOT BALLS THAT HAVE BEEN CRACKED OR DAMAGED. REJECT RATHER THAN STAKE.
- TREES WITH TRUNKS THAT HAVE GROWN TOO CLOSE TOGETHER IN THE NURSERY, RESULTING IN WEAK TRUNKS. REJECT RATHER THAN STAKE.
- PLANTING PROCEDURES THAT DO NOT ADEQUATELY TAMP SOILS AROUND THE ROOT BALL. CORRECT THE PLANTING PROCEDURE.
- ROOT BALLS PLACED ON SOFT SOIL. TAMP SOILS UNDER ROOT BALL PRIOR TO PLANTING.
- ROOT BALLS WITH VERY SANDY SOIL OR VERY WET CLAY SOIL. STAKING ADVISABLE.
- TREES LOCATED IN A PLACE OF EXTREMELY WINDY CONDITIONS. STAKING ADVISABLE.

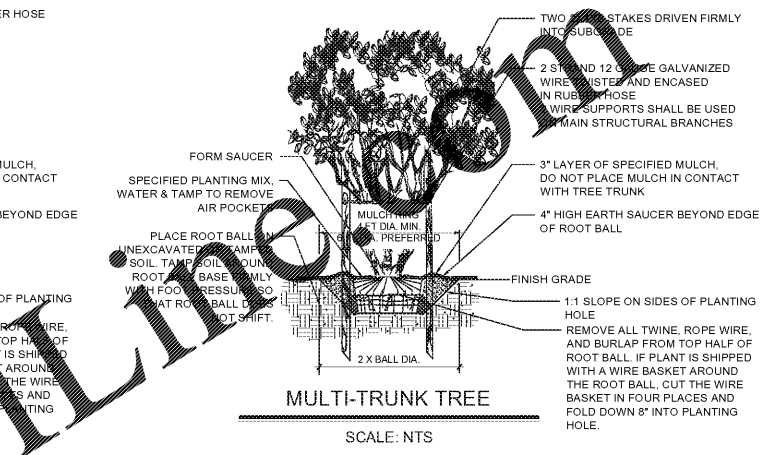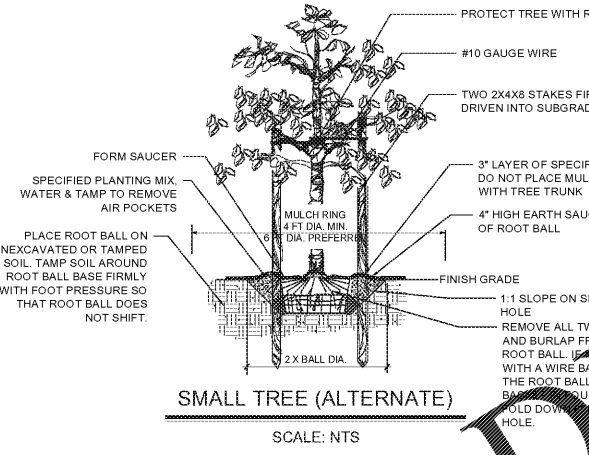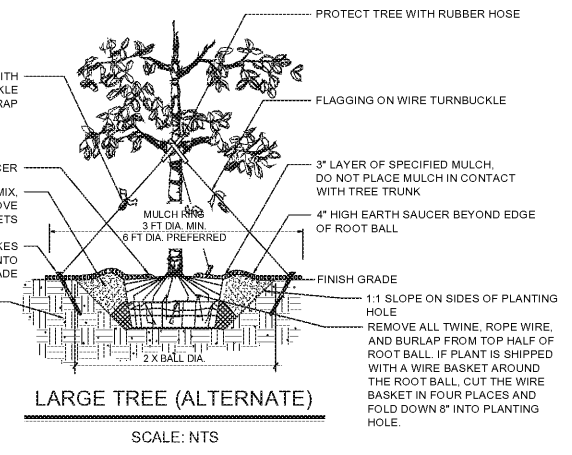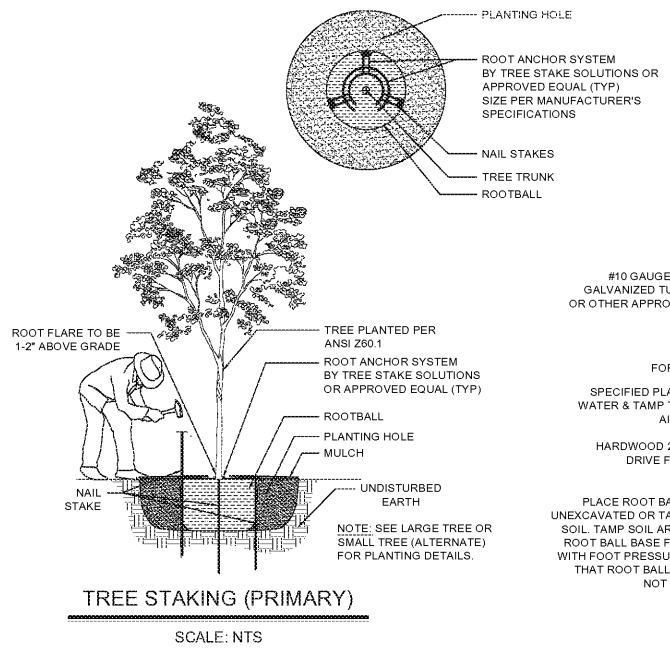

TREE PLANTING / STAKING DETAILS

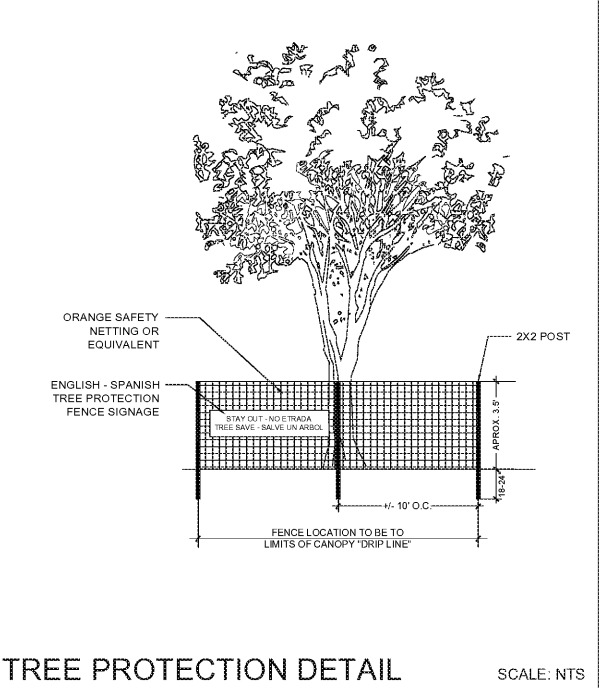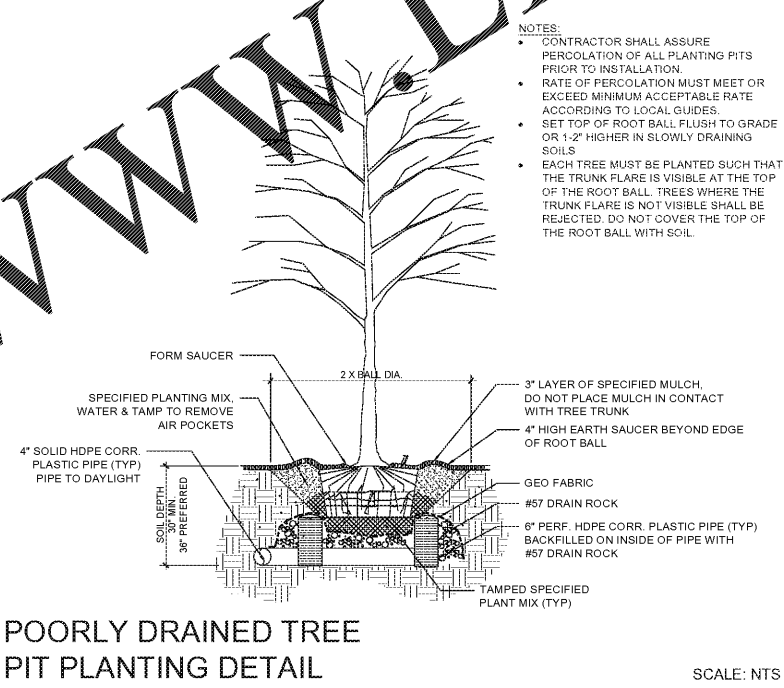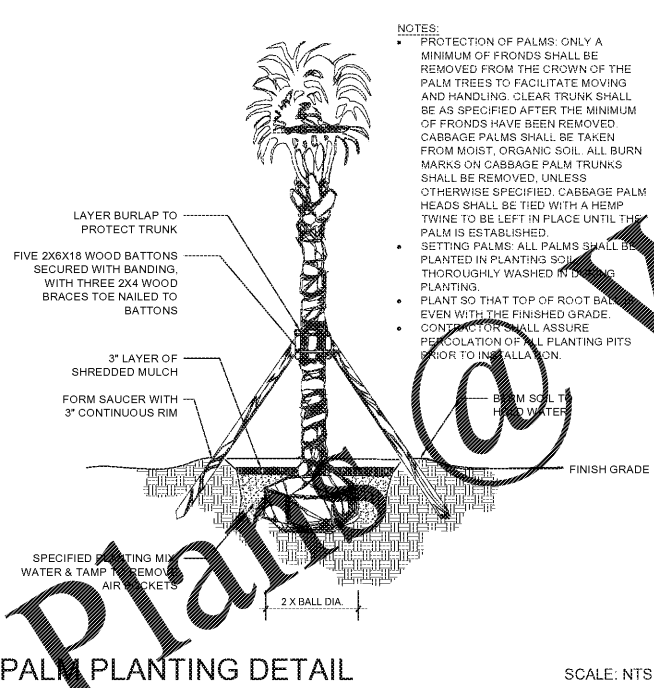
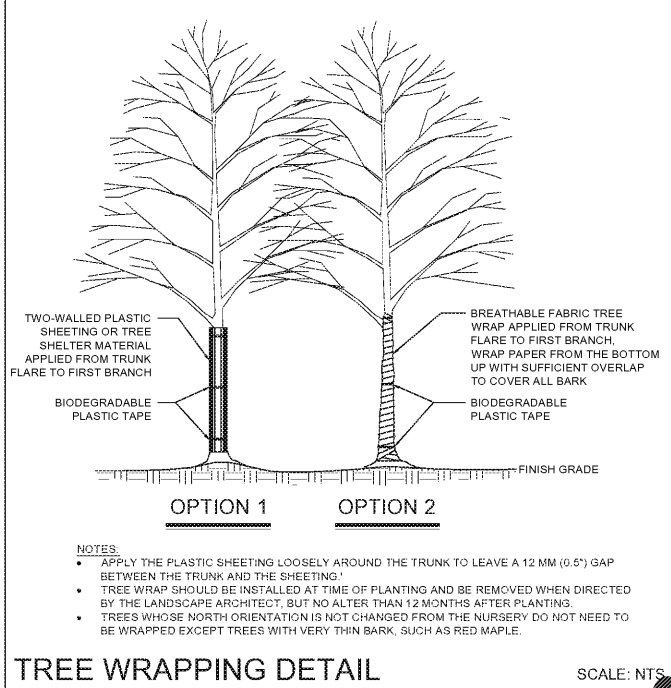


TREE WRAPPING DETAIL

PALM PLANTING DETAIL

POORLY DRAINED TREE PIT PLANTING DETAIL

TREE PROTECTION DETAIL

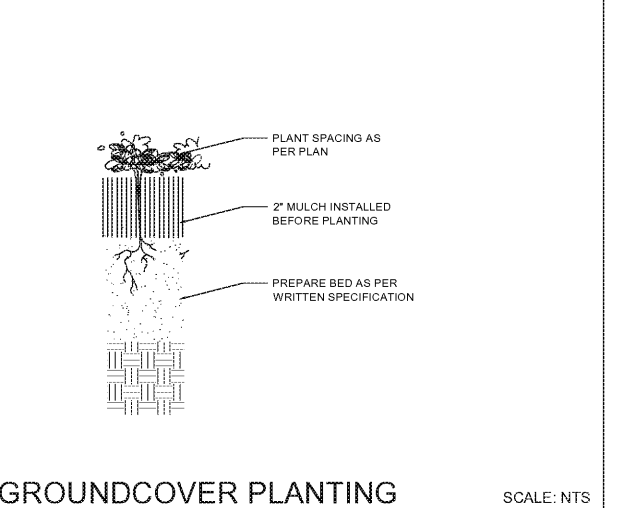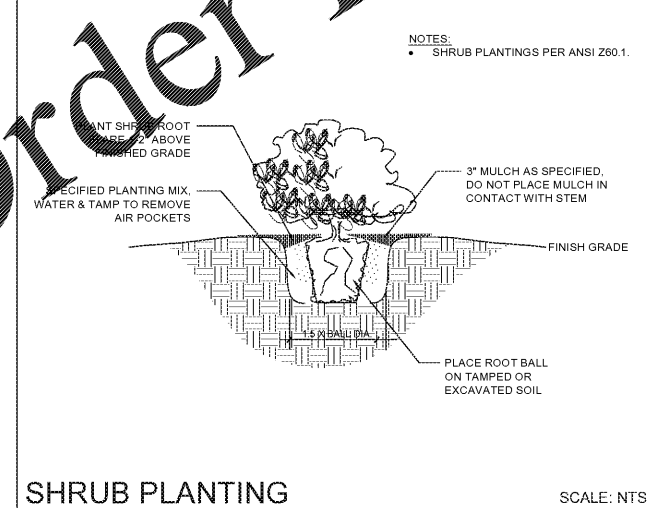

LANDSCAPE NOTES

1. THE LANDSCAPE CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES AND TAKE NECESSARY PRECAUTIONS TO PREVENT DAMAGE.
2. FINAL GRADING SHALL BE EXECUTED IN SUCH A MANNER TO PROVIDE POSITIVE DRAINAGE.
3. BERM ALL SEEDS WITH A MINIMUM OF 4\"/>

Order Plants @ WWW.LDILLINGHAM.COM