GTCC Secondary Data Hub

601 East Main Street
Jamestown, NC 27282

GTCC
GUILFORD TECHNICAL COMMUNITY COLLEGE

ABBREVIATIONS

ABV	ABOVE
AC	AIR CONDITIONING
ACMU	ARCHITECTURAL CMU
ACT	ACOUSTICAL TILE
ADD	ADDENDUM
ADJ	ADJACENT
ADJT	ADJUSTABLE
AFF	ABOVE FINISHED FLOOR
ALT	ALTERNATE
ALUM	ALUMINUM
APPROX	APPROXIMATE
ARCH	ARCHITECTURAL
AUTO	AUTOMATIC
BD	BOARD
BTWN	BETWEEN
BIT	BITUMINOUS
BLK	BLOCK
BLKG	BLOCKING
BOT	BOTTOM
BRG	BEARING
CAB	CABINET
CIPC	CAST IN PLACE CONCRETE
CJ	CONTROL JOINT
CL	CLEAR
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
CO	CASED OPENING
CO	CLEAN OUT
COLN	COLUMN
CONC	CONCRETE
CPT	CARPET
CT	CERAMIC TILE
CW	CITY WATER
DTL	DETAIL
DIM	DIMENSION
DISP	DISPOSAL
DO	DOOR OPENING
DR	DOOR
DW	DRYWALL
DWG	DRAWING
DWR	DRAWER
ELEC	ELECTRICAL
EMER	EMERGENCY
EQ	EQUAL
EQUIP	EQUIPMENT
EXST	EXISTING
EXT	EXTERIOR
FC	FIRE CODE
FCO	FLOOR CLEAN OUT
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FIN	FINISHED
FIXT	FIXTURE
FL	FLOOR
FLRG	FLOORING
FLUR	FLUORESCENT
FP	FIXED PANEL
FRTW	FIRE RETARDANT TREATED WOOD
FS	FLOOR SINK
GA	GAGE
GL	GLASS
GALV	GALVANIZED
GWB	GYPSUM WALL BOARD
GYP	GYPSUM
HDCP	HANDICAPPED
HR	HOUR
HT	HEIGHT
HW	HOT WATER
HWR	HOT WATER RETURN
HVAC	HEATING VENTING & AIR CONDITIONING
ID	INSIDE DIAMETER
INSUL	INSULATE
INT	INTERIOR
IW	INDIRECT WASTE
IWV	INDIRECT WASTE VENT
JT	JOINT
LAM	LAMINATE
LAV	LAVATORY
LT	LIGHT
MAS	MASONRY
MAX	MAXIMUM
MECH	MECHANICAL
MTL	METAL
MIN	MINIMUM
MISC	MISCELLANEOUS
MO	MASONRY OPENING
MOV	MOVEABLE
(MR) GWB	MOISTURE RESISTANT GYPSUM WALL BOARD
NIC	NOT IN CONTRACT
NO	NUMBER
NTS	NOT TO SCALE
OA	OVERALL
OC	ON CENTER
OF	OWNER FURNISHED
OF&I	OWNER FURNISHED AND INSTALLED
OF&IC	OWNER FURNISHED AND INSTALLED BY CONTRACTOR
OH	OPPOSITE HAND
OPNG	OPENING
PL	PLATE
PLAM	*PLASTIC LAMINATE*
PLAS	*PLASTER*
PLWD	*PLYWOOD*
PNL	*PANEL*
PTD	*PAPER TOWEL DISPENSER*
PARTN	*PARTITION*
PTR	*PAPER TOWEL DISPENSER*
PVC	*POLYVINYL CHLORIDE*
RUB	*RUBBER*
RA	*RETURN AIR*
REFRIG	*REFRIGERATOR*
REMOV	*REMOVABLE*
REINF	*REINFORCED*
SHT	*SHEET*
SIM	*SIMILAR*
SL	*SLIDING*
SQ	*SQUARE*
SS	*STAINLESS STEEL*
STL	*STEEL*
STA	*STATION*
STD	*STANDARD*
STRL	*STRUCTURAL*
SUSP	*SUSPENDED*
TH	*THRESHOLD*
THK	*THICKNESS*
TOS	*TOP OF SLAB*
TPD	*TOILET PAPER DISPENSER*
TYP	*TYPICAL*
VIN	*VINYL*
VCT	*VINYL COMPOSITE TILE*
VERT	*VERTICAL*
VMC	*VINYL WALL COVERING*
WC	*WATER CLOSET*
WCO	*WATER CLOSET CLEAN OUT*
WD	*WOOD*
WDW	*WINDOW*
WO	*WINDOW OPENING*

PROJECT TEAM

OWNER

Guilford Technical Community College
PO Box 309
Jamestown, NC 27282
Howard Reginald Lee, Project Manager
Phone: (336) 334-4822 - 50001
E-mail: hrlee2@gtcc.edu

ARCHITECT

Efird Sutphin Pearce & Associates PA
310 East Sycamore Street / Suite A
Greensboro, NC 27401
Charles A. Pearce, AIA, LEED AP BD+C
Phone: (336) 273-0083
E-mail: charles@espaarchitects.com

ENGINEER (STRUCTURE)

Mid-Carolina Structures, PLLC
P.O. Box 19221
Greensboro, NC 27419
Matthew Riddle, PE
Phone: (336) 337-6901
E-mail: matt@midcarolinastructures.com

ENGINEER (PME)

Triad Engineering Consultants, Inc.
2638 Williard Dairy Road, Suite 100
High Point, NC 27265
Perry Gulledge, PE
Phone: (336) 454-0225 ext. 14
E-mail: pgulledge@Triadengmep.com

MATERIAL LEGEND

- EARTH
- WASHED STONE
- BRICK
- ROUGH WOOD
- PLYWOOD
- CONCRETE MASONRY UNIT
- GYPSUM BOARD
- CONCRETE
- RIGID INSULATION
- BATT INSULATION
- FINISH WOOD

VICINITY MAP NOT TO SCALE

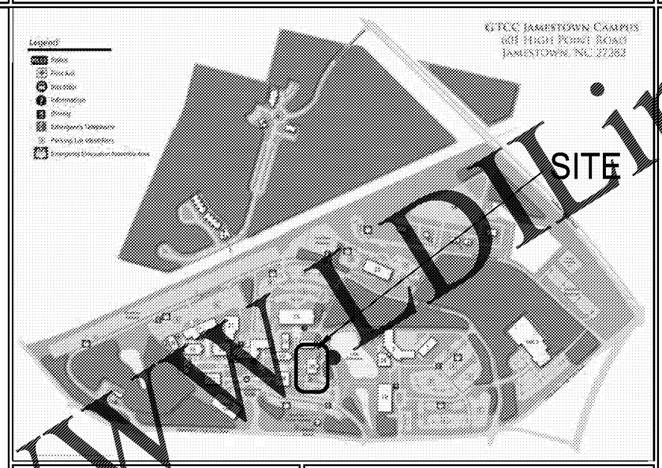

DRAWING SYMBOLS

- SECTION / SCALE — DRAWING DESCRIPTION; DRAWING SCALE
- 2 / A1.1 SECTION / SCALE — DETAIL NUMBER; DRAWING DESCRIPTION; DRAWING SCALE; SHEET WHERE DETAIL IS FOUND
- 1 / A2.1 — ELEVATION/DETAIL NUMBER; SHEET WHERE DETAIL IS FOUND
- 1 / A1.1 — DETAIL NUMBER; SHEET WHERE DETAIL IS FOUND
- A — WINDOW DESIGNATION
- A — GLASS TYPE DESIGNATION
- 1134 — DOOR DESIGNATION
- TOILET ACCESSORY TYPE DESIGNATION
- P-1 — PARTITION TYPE DESIGNATION
- 1 — DEMOLITION NOTE DESIGNATION

GENERAL NOTES

1. ALL DIMENSIONS ARE TO THE FACE OF MASONRY OR FACE OF FINISH MATERIAL UNLESS OTHERWISE NOTED.
2. ENLARGED DRAWINGS WILL TAKE PRECEDENCE IF A CONFLICT OCCURS BETWEEN SMALLER AND LARGER SCALE DRAWINGS.
3. PROVIDE WOOD BLOCKING MIN. TREATED 2x6 IN DRYWALL ASSEMBLY TO SUPPORT ALL SURFACE MOUNTED EQUIPMENT, HANDRAILS, MILLWORK, CABINETS, AND WINDOW AND DOOR FRAMES.
4. ALL WOOD BLOCKING AND SHEATHING, OTHER THAN NOTED ABOVE, SHALL BE FIRE RETARDANT TREATED.
5. ANY PENETRATIONS THRU FIRE-RATED ASSEMBLIES WILL BE SEALED WITH U.L. LISTED FIRE STOPPING SYSTEM.
6. ALL DOOR SWINGS SHALL BE LOCATED MIN. 18" FROM THE WALL ON THE PULL SIDE OF DOOR.
7. ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE NORTH CAROLINA STATE BUILDING CODE AND THE REQUIREMENTS OF ALL OTHER AUTHORITIES HAVING JURISDICTION.
8. ALL MATERIALS SHALL BE INSTALLED IN ACCORDANCE WITH THE RECOMMENDATIONS AND SPECIFICATIONS OF THE PRODUCT MANUFACTURER AND THE RECOMMENDATIONS ADOPTED BY THE TRADE ASSOCIATIONS, WHICH EVER IS MORE STRICT.
9. ALL STRUCTURAL OPENINGS AROUND AND AFFECTED BY MECHANICAL, ELECTRICAL OR PLUMBING EQUIPMENT SHALL BE VERIFIED FOR EQUIPMENT PURCHASE BEFORE PROCEEDING WITH STRUCTURAL WORK AFFECTED.
10. ALL CONTRACTORS ARE TO PROTECT ALL ROOM FINISHES DURING CONSTRUCTION ACTIVITIES. CONTRACTOR RESPONSIBLE FOR DAMAGES TO ROOM FINISHES WILL RESTORE DAMAGE AREAS TO THE SATISFACTION OF THE OWNER.
11. OWNER TO REMOVE ALL FURNISHINGS AND EQUIPMENT FROM RENOVATED AREAS UNLESS OTHERWISE NOTED.
12. ALL PLUMBING, MECHANICAL, ELECTRICAL FIRE PROTECTION AND ANY OTHER ASPECTS OF WORK NOT SPECIFICALLY IDENTIFIED ON THE ARCHITECTURAL DRAWINGS SHALL BE BY OTHERS, REFER TO DRAWINGS BY OTHERS FOR SPECIFIC INFORMATION.
13. GENERAL CONTRACTOR WILL REVIEW ALL DEMOLITION ITEMS WITH THE OWNER TO IDENTIFY ANY ITEMS SALVAGEABLE THAT THE OWNER WAS UNABLE TO REMOVE BEFORE THE START OF DEMOLITION.
14. COORDINATE UTILITY AND BUILDING SERVICE INTERRUPTION WITH OWNER. DO NOT DISABLE OR DISRUPT BUILDING FIRE OR LIFE SAFETY SYSTEM WITHOUT PRIOR NOTICE TO THE OWNER.
15. PROTECT EXISTING EQUIPMENT REMAINING FROM DUST AND DAMAGE DURING THE RENOVATION ACTIVITIES.

LIST OF DRAWINGS

GENERAL
G1.1 COVER SHEET
G2.1 CODE SUMMARY
G3.1 LIFE SAFETY PLAN / SITE PLAN

ARCHITECTURAL
A1.1 DEMOLITION and RENOVATION FLOOR PLANS
A2.1 EXTERIOR ELEVATIONS
A3.1 WALL SECTIONS
A3.2 WALL SECTIONS
A6.1 ROOM FINISH SCHEDULE / DOOR SCHEDULE / DOOR & FRAME TYPE / DETAILS

STRUCTURE
S1 RENOVATION PLAN/ NOTES/ SECTION

MECHANICAL
M1.1 MECHANICAL PLAN

ELECTRICAL
E0.1 ELECTRICAL LEGEND, NOTES & SCHEDULES
E1.1 ELECTRICAL PLAN
E6.1 ELECTRICAL RISER DIAGRAM

CHARLES ARTHUR PEARCE, III
REGISTERED ARCHITECT
CERT. NO. 6440
NORTH CAROLINA
GREENSBORO, NC
5-4-2020
CHARLES ARTHUR PEARCE, III, AIA LIC. NO. 6440 GREENSBORO, NORTH CAROLINA

EFIRD SUTPHIN PEARCE & ASSOCIATES, PA
REGISTERED ARCHITECTURAL CORPORATION
CERT. NO. 50897
NORTH CAROLINA
GREENSBORO, N.C.

© COPYRIGHT 2020
NO PART OF THESE DRAWINGS TO BE REPRODUCED WITHOUT THE WRITTEN CONSENT OF EFIRD SUTPHIN PEARCE & ASSOCIATES PA

ESPA ARCHITECTS & PLANNERS
310 East Sycamore Street, Suite A
Greensboro, NC 27401
t. 336.273.0083
f. 336.274.1913
www.espaarchitects.com
inspire create transform

Renovations to Former Play Shelter
GTCC Secondary Data Hub
601 East Main Street
Jamestown, NC 27282

Drawing Title: Cover Sheet

By	Revision

PROJECT NUMBER
2020-008

DATE
May 4, 2020

Sheet:
G1.1

Order Plans @ WWILine.com