Bojangles'

J.E. BRISCOE WAY & MADISON BLVD.
MADISON, MADISON COUNTY ALABAMA 35756

WWW.LDILine.com
Order Plans Online

DRAWING INDEX

SHEET #	SHEET TITLE	REVISIONS 1	2	3	4	5	6	7	8	9	10
T-1	TITLE SHEET										
T-2	LIFE SAFETY PLAN										
EN-1	BUILDING ENVELOPE COMPLIANCE CERTIFICATE										
STRUCTURAL											
S-1	STRUCTURAL GENERAL NOTES										
S-2	FOUNDATION PLAN										
S-3	ROOF FRAMING PLAN										
S-4	STRUCTURAL DETAILS										
ARCHITECTURAL											
A-1	FLOOR PLAN										
A-1.1	WALL AND FLOOR FINISH PLAN										
A-1.2	PLUMBING ROUGH-IN PLAN										
A-2	EXTERIOR ELEVATIONS										
A-3	BUILDING CROSS SECTIONS										
A-4	ENLARGED RESTROOM PLAN AND ELEVATIONS										
A-5	REFLECTED CEILING PLAN										
A-6	ROOF PLAN										
A-7	WALL SECTIONS										
A-8	WALL SECTIONS AND DETAILS										
A-8.1	WALL SECTIONS AND DETAILS										
A-8.2	WALL SECTIONS AND DETAILS										
A-9	INTERIOR ELEVATION AND SECTIONS										
A-10	DOOR AND WINDOW SCHEDULE										
A-11	WALL FINISH TYPE AND DOOR DETAILS										
A-12	STORAGE ROOM & DUMPSTER SCREEN										
EQ-1	EQUIPMENT PLAN AND SCHEDULE										
MECHANICAL											
M-1	MECHANICAL NOTES, LEGENDS, AND ABBREVIATIONS										
M-2	MECHANICAL PLAN										
M-3	MECHANICAL ROOF PLAN										
M-4	MECHANICAL SCHEDULES AND DETAILS										
M-5	COMCHECK ENERGY CODE COMPLIANCE										
H-1	KITCHEN HOOD DETAILS										
H-2	KITCHEN HOOD DETAILS										
PLUMBING											
P-1	PLUMBING NOTES, SCHEDULE & LEGEND										
P-2	WASTE, VENT, & STORM WATER PLANS										
P-3	DOMESTIC WATER PLAN										
P-4	GAS PLAN										
P-5	WASTE, VENT, AND GAS RISERS										
P-6	DOMESTIC WATER & RISER										
P-7	PLUMBING DETAILS										
ELECTRICAL											
E-1	ELECTRICAL SPECIFICATIONS AND LEGEND										
E-2	LIGHTING PLAN										
E-3	POWER PLAN										
E-4	ROOF POWER PLAN										
E-5	PANEL SCHEDULE & RISER DIAGRAM										
E-6	PANEL SCHEDULE & RISER DIAGRAM										

MAT'L LEGEND

- PLYWOOD
- TEXTURE 1-11
- GYPSUM BOARD
- FINISH WOOD
- ROUGH WOOD
- METAL
- GLASS
- BRICK
- CONCRETE
- CONCRETE BLOCK
- COMPACTED EARTH
- GRANULAR FILL
- BATT INSULATION

VICINITY MAP

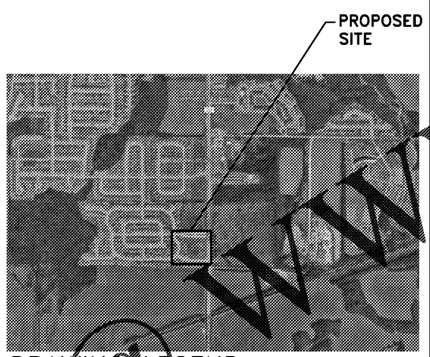

DRAWING LEGEND

- DETAIL NO. / SHEET NO. — SECTION BUBBLE
- DETAIL NO. / SHEET NO. — DETAIL REFERENCE BUBBLE
- (1) SHEET NOTE
- WORK POINT
- (1) DOOR NUMBER
- ELEVATION DATUM
- (1) REVISION NUMBER

CODE NOTES

BUILDING DATA:
TYPE OF CONSTRUCTION: VB – SPRINKLED
BUILDING OCCUPANCY TYPE: A-2
PROPOSED SQUARE FOOTAGE: 4,037 S.F.
OCCUPANCY LOAD:

Q-LINE	75 S.F./5	= 15
FIXED SEATING		= 44
LOOSE SEATING		= 52
KITCHEN	791 SF/200	= 4
STORAGE AREA	357 SF/300	= 2
TOTAL		= 117

BUILDING CODE

CODES IN EFFECT:

INTERNATIONAL BUILDING CODE, 2015 EDITION
INTERNATIONAL MECHANICAL CODE, 2015 EDITION
INTERNATIONAL FIRE CODE, 2015 EDITION
NATIONAL ELECTRICAL CODE, 2014 EDITION
INTERNATIONAL PLUMBING CODE, 2015 EDITION
INTERNATIONAL FUEL GAS CODE, 2015 EDITION
INTERNATIONAL ENERGY CONSERVATION CODE 2015 EDITION

ACCESSIBILITY CODE (ANSI A117.1 – 2010)
2010 AMERICAN NATIONAL STANDARD ACCESSIBILITY & USAGE BUILDINGS AND FACILITIES

LIST OF ABBREVIATIONS

A.I.C.	–ALT. INTERRUPTING CAPACITY	E.F.	–EXHAUST FAN	I.D.	–INTERIOR DESIGN	R.D.	–ROOF DRAIN
A.B.	–ANCHOR BOLT	EA.	–EACH	INSUL.	–INSULATION	RECEPT.	–RECEPTACLE
A.F.F.	–ABOVE FINISHED FLOOR	ELECT.	–ELECTRIC			REINF.	–REINFORCING
ALT.	–ALTERNATE	ELEV.	–ELEVATION	L.L.H.	–LONG LEG HORIZONTAL	REQ'D.	–REQUIRED
ALUM.	–ALUMINUM	EQ.	–EQUAL	L.L.V.	–LONG LEG VERTICAL	R.W.L.	–RAIN WATER LEADER
AUX.	–AUXILIARY	EQUIP.	–EQUIPMENT	L.P.	–LOW POINT		
		E.W.	–EACH WAY	LAV.	–LAVATORY	SQ.	–SQUARE
B.O.	–BOTTOM OF	EXT.	–EXTERIOR	LOC.	–LOCATE	S/S, S.S.	–STAINLESS STEEL
BD.	–BOARD			LG.	–LONG	STL.	–STEEL
BLK'G.	–BLOCKING	F.C.O.	–FLOOR CLEAN OUT			STRUC.	–STRUCTURAL
BM.	–BEAM	F.D.	–FLOOR DRAIN	MAS.	–MASONRY	SURF.MTD.	–SURFACE MOUNTED
BOT., BOTT.	–BOTTOM	F.E.	–FIRE EXTINGUISHER	MAX.	–MAXIMUM	S.W.	–SAFE WASTE
BRZ.	–BRONZE	FIN.FL.	–FINISH FLOOR	MIN.	–MINIMUM		
		F.O.M.	–FACE OF MASONRY	MTD.	–MOUNTED	T&G	–TONGUE AND GROOVE
℄	–CENTER LINE	F.O.S.	–FACE OF STUD	MTL.	–METAL	T.O.S.	–TOP OF SLAB
C. COND.	–CONDUIT	F.R.P.	–FIRE RATED PANELING			TYP.	–TYPICAL
CLG.	–CEILING	F.S.	–FLOOR SINK	N.I.C.	–NOT IN CONTRACT		
COL.	–COLUMN	FT.	–FOOT			UR.	–URINAL
CONC.	–CONCRETE	FTG.	–FOOTING	O.C.	–ON CENTER		
CONN.	–CONNECTION			O.D.	–OUTSIDE DIMENSION	VEN.	–VENEER
CONT.	–CONTINUOUS	GA.	–GAUGE	O.H.	–OVERHANG	VERT.	–VERTICAL
CONTR.	–CONTRACTOR	GALV.	–GALVANIZED	O/O	–OUT TO OUT	VEST.	–VESTIBULE
CTR.	–CENTER	G.C.	–GENERAL CONTRACTOR			V.T.R.	–VENT THRU ROOF
C.W.	–COLD WATER	G.P.M.	–GALLONS PER MINUTE	ø	–PHASE, DIAMETER		
		GRD.	–GROUND	P.	–PLATE	W.	–WIDE, WASTE
ø	–DIAMETER, PHASE	G.W.	–GREASY WASTE	PLYWD.,PLWD.	–PLYWOOD	W/	–WITH
DIA.	–DIAMETER, DIAGRAM	GYP.	–GYPSUM	P.O.S.	–POINT OF SALE	W.C.	–WATER CLOSET
DBL.	–DOUBLE			PREFAB.	–PREFABRICATED	W.C.O.	–WALL CLEAN OUT
D/T	–DRIVE–THRU	HORIZ.	–HORIZONTAL	P.S.F.	–POUNDS PER SQ. FOOT	WD.	–WOOD
DWG.	–DRAWING	HT.	–HEIGHT	P.S.I.	–POUNDS PER SQ. INCH	W.H.	–WATER HEATER
		H.W.	–HOT WATER	P.T.	–PRESSURE TREATED	W.I.B.	–WALK IN BOX
		H.D.	–HAND DRYER	PTN.	–PARTITION	W.P.	–WATER PROOF
		H.P.	–HORSE POWER, HIGH POINT	P.V.C.	–POLYVINYL CHLORIDE	W.W.F.	–WELDED WIRE FABRIC
						W.W.M.	–WELDED WIRE MESH

GENERAL NOTES

1. ALL WORK SHALL BE PERFORMED BY SKILLED MECHANICS IN ACCORDANCE WITH THE BEST PRACTICES OF THE RESPECTIVE TRADES, MEETING ALL APPLICABLE STATE AND LOCAL CODES, RULES AND ORDINANCES. GENERAL CONTRACTOR SHALL OBTAIN ALL PERMITS AND PAY FEES FOR SAME.
2. THE DIMENSIONS, LOCATIONS, AND DETAILS SHOWN ARE BASED ON THE BEST AVAILABLE INFORMATION AT THE TIME OF PREPARATION OF THESE DRAWINGS. DEVIATIONS WHICH ARE NECESSARY OR WHICH CONFLICT SHALL BE REPORTED TO THE ARCHITECT AND/OR OWNER. CONTRACTOR SHALL HAVE FULL RESPONSIBILITY FOR DEVIATIONS NOT APPROVED BY THE ARCHITECT AND/OR THE OWNER.
3. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO EXERCISE EXTREME CARE IN REGARD TO ALL EXISTING UTILITIES, TRAFFIC SIGNS, STREET MARKERS, SHRUBBERY, DRIVEWAYS, WALKS, ETC., WHETHER SHOWN ON THE DRAWINGS OR NOT, AND THE CONTRACTOR SHALL EITHER REPAIR THE DAMAGE OR MAKE RESTITUTION TO THE OWNER OF SUCH PROPERTY.
4. ALL DIMENSIONS AND EXISTING CONDITIONS AS SHOWN ARE APPROXIMATE AND FOR GENERAL GUIDELINE PURPOSES ONLY. CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS PRIOR TO BIDDING AND/OR CONSTRUCTION. ANY DISCREPANCIES SHALL BE REPORTED IMMEDIATELY TO THE ARCHITECT PRIOR PERTAIN TO COMMENCING ANY WORK.
5. THE CONTRACTOR SHALL VISIT AND EXAMINE THE SITE OF WORK, THE QUANTITY OF WORK, AND CONDITION OF THE SITE PRIOR TO SUBMITTING BID PROPOSAL, AND SATISFY HIMSELF THAT THE WORK CAN BE COMPLETED AS SET FORTH IN THE CONSTRUCTION PLAN.
6. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR COORDINATION OF NEW WORK WITH EXISTING AND TO REPAIR ANY PART OF THE BUILDING OR SURROUNDING STRUCTURES AND SURFACES DAMAGED DUE TO REMODELING
7. THE CONTRACTOR SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS AND REGULATIONS PERTAINING TO THE HEALTH AND SAFETY OF EMPLOYEES, AND HOLD HARMLESS THE OWNER AND THE ARCHITECT REGARDING SUCH ACTIONS.
8. THE CONTRACTOR IS RESPONSIBLE FOR ALL PERMITS AND INSPECTIONS, STATE AND LOCALLY REQUIRED, AND MUST PAY FOR SAME.
9. IT SHALL BE REQUIRED THAT ALL MATERIALS AND WORKMANSHIP COMPLY WITH THE REQUIREMENTS OF BOTH LOCAL ORDINANCES AND THE APPLICABLE BUILDING CODES, LATEST EDITION, INCLUDING ALL ADDENDA.
10. THE LOCATION OF EXISTING UNDERGROUND UTILITIES, IF SHOWN, ARE PER RECORD DRAWINGS AND HAVE NOT BEEN VERIFIED BY ACTUAL FIELD CHECKS. CONTRACTOR TO VERIFY EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO CONSTRUCTION.
11. CLEAN UP SHALL BE PERFORMED CONTINUOUSLY DURING WORKING DAYS TO KEEP BUILDINGS AND PREMISES FREE FROM ACCUMULATION OF WASTE MATERIALS AND RUBBISH. AT THE COMPLETION OF THE WORK, REMOVE ALL WASTE, RUBBISH, AND UNUSED SURPLUS MATERIALS FROM AND AROUND THE SITE AND PREMISES, AND LEAVE THE SITE CLEAN. JUST PRIOR TO INSPECTION, REMOVE ALL DUST, DIRT, AND STAINS FROM FINISHED SURFACE AND LEAVE WORK READY FOR USE.
12. COORDINATION OF ALL WORK BETWEEN DIFFERENT TRADES IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR.
14. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL DELIVER TO THE OWNER A COMPLETE SET OF "AS-BUILT" DRAWINGS SHOWING LOCATIONS OF WORK INSTALLED, INCLUDING CHANGES TO ALL UNDERGROUND UTILITIES, CERTIFICATES, AFFIDAVITS, OPERATION INSTRUCTIONS, MANUFACTURE'S INSTRUCTIONS ON ALL EQUIPMENT, AND DEMONSTRATE THAT ALL IS IN PROPER WORKING ORDER.
15. SUBMIT CONSTRUCTION SCHEDULE FOR THE WORK, INDICATING WORKING HOURS, DELIVERIES OF MATERIALS, AND DISRUPTION OF OPERATIONS OF BUSINESS TO THE OWNER FOR APPROVAL BEFORE CONSTRUCTION IS STARTED.
17. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FURNISH AND INSTALL ALL WORK, FIXTURES, AND EQUIPMENT NECESSARY TO COMPLETE THE PROJECT.
18. CONTRACTOR TO PROVIDE ALL BARRICADES, SCAFFOLDING, AND OTHER MEANS OF PROTECTION AS MAY BE REQUIRED TO COMPLY WITH THE STATE LAWS AND MUNICIPAL ORDINANCES TO ADEQUATELY SAFEGUARD PROPERTY AND PERSONS.
19. CHECK DRAWINGS, DIMENSIONS AND SITE CONDITIONS FOR DISCREPANCIES THAT IMPEDE CONSTRUCTION. REPORT SAME TO THE OWNER AND THE ARCHITECT IN WRITING. FAILURE TO DO SO RELIEVES THE OWNER AND THE ARCHITECT OF ALL RESPONSIBILITIES AND COSTS INCURRED.
20. OWNER SHALL NOT BE RESPONSIBLE FOR THE PROTECTION AND/OR SAFETY OF THE CONTRACTOR'S WORK, WORKERS, SUBCONTRACTORS, MATERIALS AND/OR EQUIPMENT.
21. THESE NOTES SHALL BE SUPPLEMENTARY TO ALL OTHER STANDARD SPECIFICATIONS, IF PROVIDED. SHOULD ANY CONFLICT EXIST BETWEEN THESE NOTES AND THE SPECIFICATIONS, THE ARCHITECT SHALL BE CONTACTED FOR CLARIFICATION.
22. THE OWNER SHALL SUPPLY THE EQUIPMENT,SEATING PACK. & DECOR TO THE CONTRACTOR FOR INSTALLATION THE CONTRACTOR SHALL SUPPLY ALL OTHER REQUIRED MATERIALS, TOOLS, LABOR, AND APPURTENANCES IN ORDER TO ACHIEVE A COMPLETE AND OPERABLE INSTALLATION.
23. ALL ELECTRICAL CONNECTIONS, WIRING, CONDUIT, CIRCUIT BREAKERS, AND INTER-CONNECT CONTROL WRING SHALL BE INCLUDED AS NECESSARY AND/OR REQUIRED.

R-2002

DATE	RELEASE FOR CONSTRUCTION
04.30.20	
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~
~	~

CHECKED BY: RZ
DRAWN BY: W.A.A.C.

© 2020, AKA STUDIO, P.C. THESE DRAWINGS AND DESIGNS ARE PROTECTED BY THE COPYRIGHT LAWS OF THE UNITED STATES. THESE DRAWINGS OR ANY PART THEREOF MAY NOT BE USED FOR ANY PURPOSE OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF AKA STUDIO, P.C.

RESTAURANT FOR:
NEW GENERATION FOODS, LLC
P.O. BOX 736
ATHENS, AL 35612
TEL. (256) 729-9136

AKA STUDIO, PC
Architects & Interiors
74WOODSTOCK ROAD, ROSWELL, GA 30075
(770) 642-9030 info@akastudiopc.com

STATE OF ALABAMA
ROBERT A. ZAPPELLA
REGISTERED ARCHITECT
#8461

J.E. BRISCOE WAY & MADISON BLVD. PROJECT: R-2002
MADISON, MADISON COUNTY ALABAMA DATE: 04/30/20

Bojangles' RESTAURANT

TITLE SHEET

T-1