LIGHT FIXTURE SCHEDULE (#)

"OW" FIXTURES AND LAMPS ARE FURNISHED BY THE OWNER FOR INSTALLATION BY THE CONTRACTOR. "GC" FIXTURES AND LAMPS ARE FURNISHED AND INSTALLED BY THE CONTRACTOR.

TYPE	SUPPLIED BY	DESCRIPTION	VENDOR	MODEL	VOLTAGE	INPUT VA	COLOR TEMP	LIGHT SOURCE	MOUNTING
1	OW	8' STRIP	ACUITY BRANDS LIGHTING, INC.	CLX L96 10000LM SEF RDL MVOLT EOHN 40K 80CRI AETCD WH	120/277	67 VA	4000K	INTEGRAL LED	SURFACE
8	OW	1' x 4' FLAT PANEL	REXEL INC	PT14030W	120/277	30 VA	4000K	INTEGRAL LED	RECESSED
10	OW	2' x 4' VOLUMETRIC TROFFER	CREE INC	CR24M-40L-40K-10V-FD	120/277	30 VA	4000K	INTEGRAL LED	RECESSED
17	OW	EMERGENCY LIGHT	REXEL INC	EVHC6IDP-WM	120/277	3 VA	-	INTEGRAL LED	WALL
18	OW	EMERGENCY LIGHT	REXEL INC	EVHC8IDP-WM	120/277	3 VA	-	INTEGRAL LED	WALL / CEILING
36	OW	8' TRACK MOUNTED CYLINDER	REXEL INC	C4LP-N-V-D-30-98-35-28-L-1-TRACK MOUNT	120/277	34 VA	3500K	INTEGRAL LED	TRACK
39	OW	8' STRIP CONTINUOUS ROW 18% UPLIGHT	GE LIGHTING SOLUTIONS LLC	LUSC8ADADVT40VQCSWHTE	120/277	80 VA	4000K	INTEGRAL LED	SUSPENDED
40	OW	5' EDGELIT BLADE STRIP	GE LIGHTING SOLUTIONS LLC	LEL60A093MMT39VQG2WHTE	120/277	68 VA	3500K	INTEGRAL LED	TRACK
68R	OW	CIRCULAR RECESSED DOWNLIGHT	CREE INC	LR6-10L-35K-277V w/ RR6-277V	120/277	12 VA	3500K	INTEGRAL LED	RECESSED

LIGHT FIXTURE NOTES: (APPLIES TO ALL LIGHT FIXTURES):

A. SUPPORT ALL RECESSED OR LAY-IN LIGHT FIXTURES, DIRECTLY FROM THE FIXTURE HOUSING TO THE STRUCTURE, ABOVE, WITH A MINIMUM OF TWO 12-GAUGE WIRES LOCATED AT DIAGONALLY OPPOSITE CORNERS. FIXTURE SUPPORT WIRES MAY BE SLIGHTLY LOOSE TO ALLOW THE FIXTURE TO SEAT IN THE GRID GRID SYSTEM. ATTACH LIGHT FIXTURES TO THE SUSPENDED CEILING SYSTEM TO RESIST 100 PERCENT OF THE FIXTURE WEIGHT ACTING IN ANY DIRECTION. COMPLETE IN ACCORDANCE WITH APPLICIABLE BUILDING CODE REQUIREMENTS.

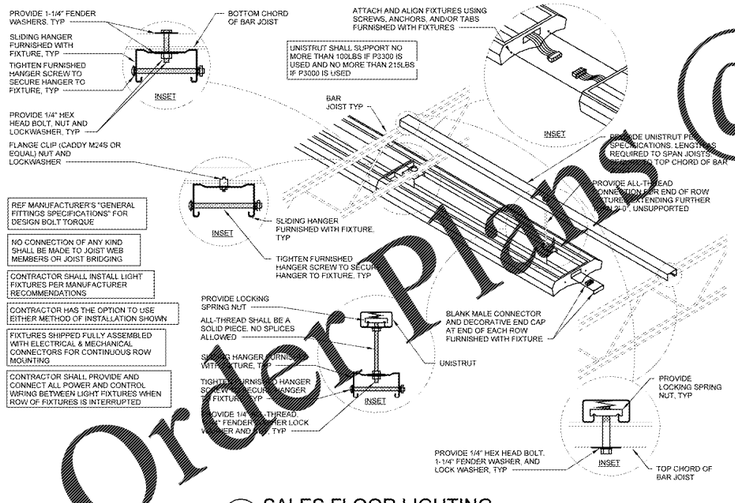

2 SALES FLOOR LIGHTING
NTS

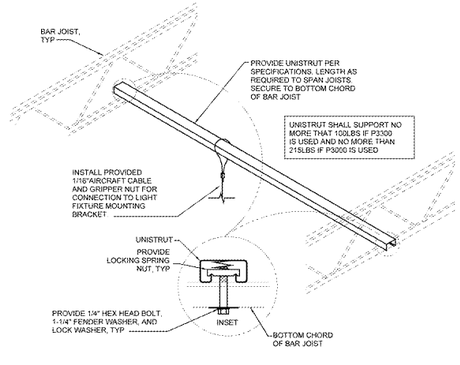

1 SUSPENDED LIGHTING CONNECTIONS TO STRUCTURE
NTS

Order Plans @ www.LDILine.com

CYNTERGY
807 SOUTH CINCINNATI
SECOND FLOOR
TULSA, OK 74119
918.877.6000
www.cyntergy.com

STIPULATION FOR REUSE

CONSULTANTS

Walmart
FAYETTEVILLE, NC
STORE NO. 1261-246
JOB NUMBER: USRM-WO1205 | PROTO | 185 PROTO SC

ISSUE BLOCK

CHECKED BY:	DES
DRAWN BY:	BDJ
PROTO CYCLE:	02/28/2020
DOCUMENT DATE:	04/15/2020

DOCUMENTS WITHOUT SIGNATURE AND REQUIRED SEAL OF AOR/EOR ARE NOT FOR CONSTRUCTION

CYNTERGY ENGINEERING, PLLC
CA # P-0884
EXPIRES 06/30/2020
MATTHEW RUTKOWSKI, P.E.
ENGINEER OF RECORD

LIGHTING DETAILS AND SCHEDULES

SHEET: E1.3

EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITIONS. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. CONTRACTOR SHALL CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND EXISTING CONDITIONS.

EACH SUBCONTRACTOR IS RESPONSIBLE FOR HAVING A THOROUGH KNOWLEDGE OF ALL DRAWINGS AND SPECIFICATIONS IN THEIR RELATED FIELD. THE FAILURE TO ACQUAINT THEMSELF WITH THIS KNOWLEDGE DOES NOT RELIEVE THE RESPONSIBILITY OF PERFORMING THE WORK PROPERLY. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED BECAUSE OF CONDITIONS THAT OCCUR DUE TO FAILURE TO FAMILIARIZE WORKERS WITH THIS KNOWLEDGE.

2/12/2020 4:03:06 PM
C:\Revit Local Files\USRM-WO1205_rutkowskiRevitModel_NC_185 PROTO_bdjacobs.rvt