FINISH SCHEDULE

ROOM NAME	ROOM NO.	BASE	CEILING	FLOOR	WALL	NOTES
CHECK-IN AREA		RB	EX.STR.	SC	GWB	
OFFICE	101	RB	APC-1	CPT	CMU/GWB	
STO.	102	RB	APC-1	LVT	GWB	
OFFICE	103	RB	APC-1	CPT	CMU/GWB	
BREAK	104	RB	APC-1	LVT	GWB	
WAITING	105	RB	APC-1	LVT	CMU/GWB	
CONFERENCE	106	RB	APC-1	CPT	GWB	
RECEPT.	107	RB	APC-1	CPT	CMU/GWB	
TOIL.	108	QTB	APC-1	QT	GWB	
OFFICE	109	RB	APC-1	CPT	CMU/GWB	
TOIL.	110	QTB	APC-1	QT	GWB	
OFFICE	111	RB	APC-1	CPT	CMU/GWB	
WK RM	112	RB	APC-1	LVT	GWB	
HALL	113	RB	APC-1	LVT	CMU/GWB	
MECH	114	RB	APC-1	SC	GWB	
TECH OFFICE	115	RB	APC-1	CPT	CMU/GWB	
DATA	116	RB	APC-1	SC	GWB	
TECH OFFICE	117	RB	APC-1	CPT	CMU/GWB	
TEXT BOOKS	118	RB	EX. STR.	SC	CMU/FENCE	
RISER	119	RB	APC-1	SC	CMU/GWB	
OPEN OFFICE	120	RB	APC-1	LVT	CMU/GWB	
TOIL.	121	QTB	APC-1	QT	CMU/GWB	
ELEC.	122	RB	APC-1	SC	CMU/GWB	
TOIL.	123	QTB	APC-1	QT	GWB	
CUST.	124	QTB	APC-1	QT	CMU/GWB	
LAUND.	125	QTB	APC-1	QT	CMU/GWB	
MECH.	126	RB	APC-1	SC	CMU/GWB	
ENGRAVING	127	RB	APC-1	SC	GWB	
HALL	128	RB	APC-1	SC	CMU/GWB	
WORK AREA	129	RB	EX.STR.	SC	CMU/GWB	
DEAD TECHNOLOGY	130	-	EX.STR.	SC	CMU/FENCE	
TECHNOLOGY	131	RB	EX.STR.	SC	CMU/FENCE	
SCIENCE AREA	132	RB	EX.STR.	SC	CMU	
TESTING	133	RB	EX.STR.	SC	CMU/FENCE	
CUSTODIAL CONTRACTOR AREA	134	-	EX.STR.	SC	FENCE	
GENERAL SHELVING AREA	135	RB	EX.STR.	SC	CMU/FENCE	

GENERAL NOTES

1. ALL PRE-ENGINEERED METAL BUILDING COMPONENTS ARE FACTORY PRIMED. PAINT ALL INTERIOR EXPOSED PRE-ENGINEERED METAL BUILDING COMPONENTS (MAIN STRUCTURAL SUPPORTS, GIRTS, PURLINS, BRACING) LOCATED IN SHOP AREA. PAINT ALL EXPOSED EXTERIOR METAL BUILDING COMPONENTS (MAIN STRUCTURAL SUPPORTS, GIRTS, PURLINS, BRACING) SUPPORTING BUILDING OVERHANG.

FINISH LEGEND

FLOOR
- QT-1 (QUARRY TILE)
- LVT (LUXURY VINYL TILE)
- CPT (CARPET)
- SC (SMOOTH SEALED CONCRETE)

BASE
- QTB (QUARRY TILE COVE BASE)
- RB (4" RESILIENT BASE)

CEILING
- APC-1 (ACOUSTICAL PANEL CEILING SYSTEM - TYPE 1)
- EX.STR. (EXPOSED STRUCTURE - PAINTED) (PAINT MAIN STRUCTURAL COMPONENTS, PURLINS AND GIRTS.)

WALL
- CMU (CONCRETE MASONRY UNITS - PAINTED)
- GWB (GYPSUM WALL BOARD - PAINTED)
- FENCE (SEE FLOOR PLAN KEY NOTES FOR FENCE)

DOOR SCHEDULE

DOOR NO.	ROOM NAME	ROOM NUMBER	NO. DOORS	OPENING SIZE	DOOR TYPE	ELEVATION	FRAME H	FRAME J	MATL	FIRE RATING	NOTES
A01			SNGL	3'-0"×7'-0"	N1-FRP	HF01	H1	J1	HM		CONTROLLED VISITOR ENTRY AND CARD READER
A02			SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A03	RISER	119	PAIR	6'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		CARD READER
A04	ELEC.	122	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A05	TOIL.	121	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A06	TOIL.	123	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A07	CUST.	124	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A08	LAUND.	125	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A09	MECH.	126	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A10	ELEC.	122	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A11	ENGRAVING	127	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A12	WORK AREA	129	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A13	WORK AREA	129	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A14	WAITING	105	PAIR	3'-0"×7'-0"	GG-FRP	A02	AH1	AJ1	ALUM		CONTROLLED VISITOR ENTRY AND CARD READER
A15	HALL	113	SNGL	3'-0"×7'-0"	N1-FRP	HF01	H1	J1	HM		
A16	HALL	113	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A17	OFFICE	101	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A18	OFFICE	103	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A19	STO.	102	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A20	TOIL.	108	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A21	WAITING	105	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A22	TOIL.	110	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		UNDERCUT DOOR 3/4" PER MECHANICAL
A23	RECEPT.	107	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A24	OFFICE	109	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A25	OFFICE	111	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A26	MECH	114	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A27	TECH OFFICE	115	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A28	TECH OFFICE	117	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A29	HALL	113	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A30	GENERAL SHELVING AREA	135	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A31	DATA	116	SNGL	3'-0"×7'-0"	F-W	HF02	H2	J2	HM		
A32	CONFERENCE	106	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A33	HALL	113	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A34	CONFERENCE	106	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A35	BREAK	104	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A36	BREAK	104	SNGL	3'-0"×7'-0"	N1-W	HF02	H2	J2	HM		
A37	SCIENCE AREA	132	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A38	GENERAL SHELVING AREA	135	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A39	GENERAL SHELVING AREA	135	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A40	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A41	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A42	GENERAL SHELVING AREA	135	SNGL	3'-0"×7'-0"	F-FRP	HF01	H1	J1	HM		
A43	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A44	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A45	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A46	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A47	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A48	GENERAL SHELVING AREA	135		8'-0"×10'-0"	OCD	OCD	H3	J3	-		
A49	GENERAL SHELVING AREA	135		12'-0"×12'-0"	OCD	OCD	H3	J3	-		



HEAD



HEAD



JAMB



JAMB

NOTE:
SEE MECHANICAL FOR LOCATION OF HVLV (HIGH-VOLUME, LOW-SPEED) CEILING FANS, WALL FANS AND WALL LOUVERS.



NOTE: PROVIDE PAINTED 3" WIDE CHANNEL IRON UNDER FAN UNIT AND 3/8" THREADED ROD ATTACHED TO STRUCTURE ABOVE FOR SUPPORT.

SILL



SILL

1 A2.11 FAN DETAILS
SCALE: 1 1/2"= 1'-0"

2 A2.11 LOUVER DETAILS
SCALE: 1 1/2"= 1'-0"

GENERAL NOTES

1. REFER TO MECHANICAL DRAWINGS FOR GRILLE LOCATIONS AND UNDERCUTS, IF APPLICABLE.
2. SEE DOOR HARDWARE SCHEDULE FOR CLOSERS FOR DOORS LOCATED IN WALLS INDICATED TO BE SMOKE PARTITIONS SMOKE BARRIERS AND/OR FIRE RATED OPENINGS, IF APPLICABLE.
3. PROVIDE DOOR HARDWARE FOR FIRE RATED OPENINGS INDICATED ON SCHEDULE THAT COMPLIES WITH NFPA STANDARD NO.80 AND REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION. PROVIDE ONLY ITEMS OF DOOR HARDWARE THAT ARE LISTED AND ARE IDENTICAL TO PRODUCTS TESTED BY UL, WARNOCK HERSEY, FM, OR OTHER TESTING AND INSPECTING ORGANIZATION ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION FOR USE ON TYPES AND SIZES OF DOORS INDICATED IN COMPLIANCE WITH REQUIREMENTS OF FIRE RATED DOOR AND DOOR FRAME LABELS, IF APPLICABLE.
4. SEE DOOR HARDWARE SCHEDULE IN SPECIFICATIONS FOR DOORS REQUIRING PANIC HARDWARE.

DOOR DESIGN

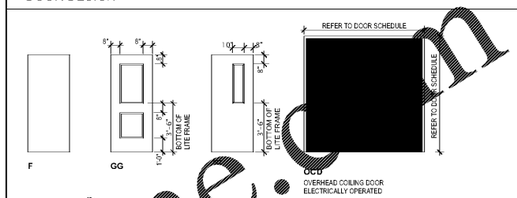

DOOR TYPE NOMENCLATURE

DESIGN → XX - XX ← CONSTRUCTION

REFER TO DOOR SCHEDULE FOR SCHEDULED DOOR TYPE.

GLAZING KEY NOTES:

1. GLASS TYPE IDENTIFIED IN ONE LITE OF A FRAME SHALL BE THE SAME TYPE FOR OTHER LITES WITHIN THAT FRAME, UNLESS NOTED OTHERWISE.

GLASS TYPES SCHEDULE

GT-1 1/4" UNCOATED CLEAR TEMP. FLOAT-GLASS UNITS AT INTERIOR NON-FIRE RATED DOORS AND VIEW OPENINGS, UNLESS NOTED OTHERWISE.

GT-2 1" TINTED INSULATING GLASS UNITS TEMPERED AT ALL EXTERIOR HOLLOW METAL FRAME SIDE LITES, TRANSOMS, ALUM. FRAMES, AND EXTERIOR DOORS, UNLESS NOTED OTHERWISE.

DOOR CONSTRUCTION LEGEND

W SOLID CORE WOOD

FRP FIBERGLASS REINFORCED POLYESTER

GLAZING PLACEMENT





T1



T2

TYPICAL TRANSITION STRIP DETAILS

SCALE: HALF FULL SIZE

NOTE:
TRANSITION STRIP DETAILS ARE FOR ALL CONDITIONS WHERE DIFFERENT FLOOR FINISHES ADJOIN. INSTALL TRANSITION STRIPS WHERE A DOOR IS INDICATED.

Order Plans @ WWW.LDLine.com

REVISIONS/ISSUANCES

NO.	DATE	DESCRIPTION

STATE OF GEORGIA · JOHN SMITH JR. · REGISTERED ARCHITECT

Manley Spangler Smith Architects
A Professional Corporation

525 East Taylor St.
P.O. Box 880
Griffin, Georgia 30224

Office 770.227.5473
Fax 770.228.3442

PROJECT:
HENRY COUNTY SCHOOLS - DISTRIBUTION CENTER

CLIENT:
HENRY COUNTY BOARD OF EDUCATION

SHEET TITLE:
FINISH AND DOOR SCHEDULES

© 2020 Manley Spangler Smith Architects, PC

PROJECT NUMBER:	201827
DATE:	08.13.20
SCALE:	AS NOTED
DRAWN BY:	JS, LT
CHECKED BY:	RV

SHEET NO.:
A2.11