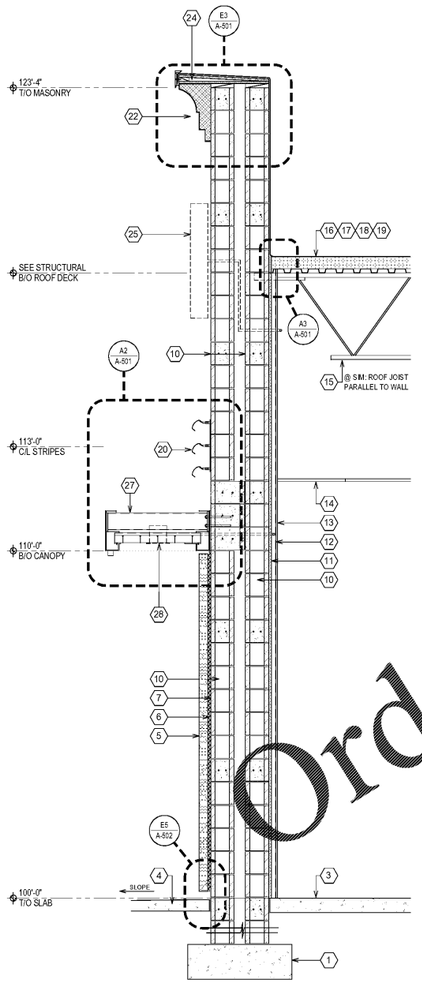

WALL SECTION D1

SCALE: 1/2 = 1'-0"

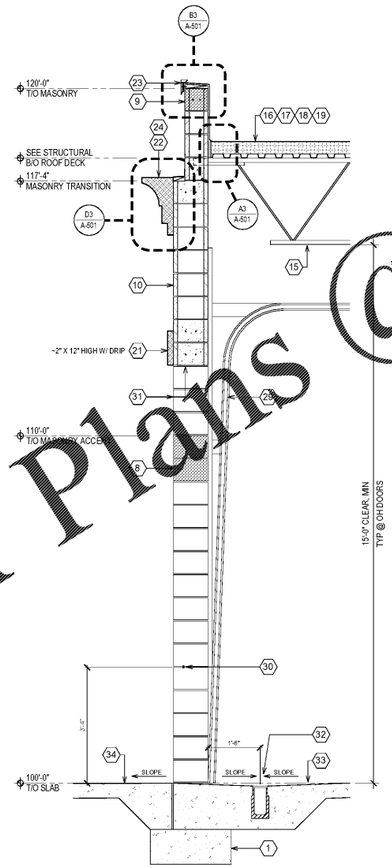

WALL SECTION C1

SCALE: 1/2 = 1'-0"

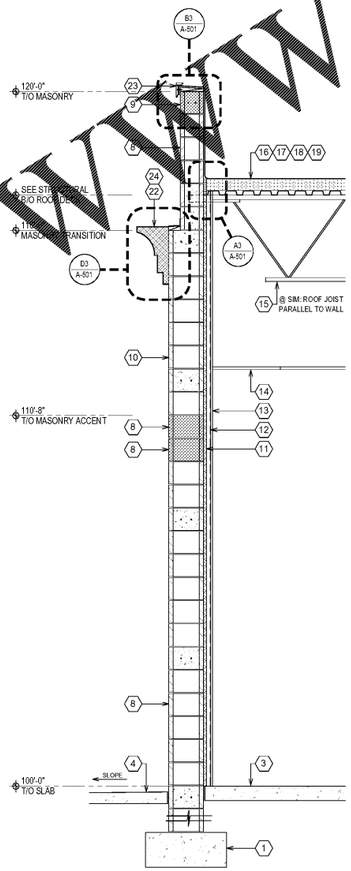

WALL SECTION B1

SCALE: 1/2 = 1'-0"

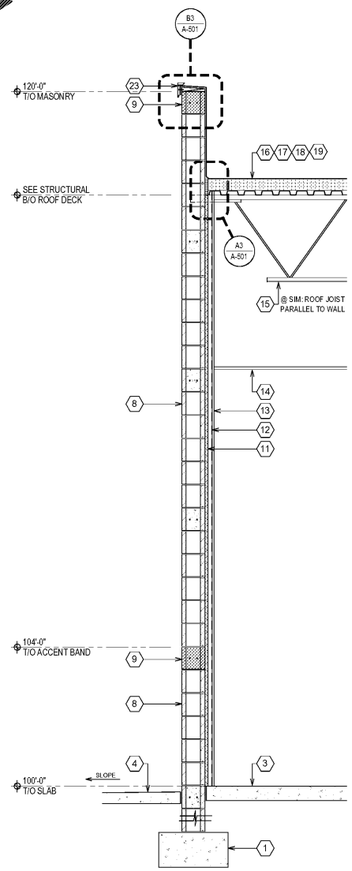

WALL SECTION A1

SCALE: 1/2 = 1'-0"

GENERAL NOTES

1. SEE SHT A-201 EXTERIOR ELEVATIONS AND/OR SHT A-603 FINISH PLAN & SCHEDULES FOR FINISH REQUIREMENTS.
2. IF BUILDING IS CLASSIFIED AS TYPE 2B CONSTRUCTION, ALL WOOD BLOCKING MUST BE TREATED FOR FIRE-RESISTIVE CONSTRUCTION. REFER TO SHEET G-002 FOR VERIFICATION.

KEYED NOTES

1. CONC FOOTING. SEE STRUCTURAL.
2. NOT USED.
3. CONC SLAB W/ 1/2" MIN EXPANSION JOINT W/ FIBER FILLER AT WALL.
4. CONC SIDEWALK AND/OR ASPHALT (SEE CIVIL). ENSURE POSITIVE DRAINAGE IS PROVIDED AWAY FROM BUILDING STRUCTURE.
5. MANUF STONE VENEER IN MORTAR BED W/ METAL LATH. REFER TO MANUFACTURER FOR INSTALLATION REQUIREMENTS.
6. 1/2" DRAINAGE MAT FULL HEIGHT BEHIND STONE VENEER.
7. WEATHER RESISTIVE BARRIER (WRB). INSTALL MANUF RECOMMENDED PRODUCT FOR FINISH MATERIAL SCHEDULED.
8. SPLIT-FACED CMU FIELD. SEE STRUCT FOR REQD BLOCK SIZES AND REINFORCING.
9. SINGLE-SCORE SMOOTH FACE CMU ACCENT BAND - SHOWN SHADED.
10. SMOOTH-FACED CMU. SEE STRUCT FOR RQDD BLOCK SIZES AND REINFORCING.
11. 1" WALL INSULATION (R-5ci MIN). EXTEND SLAB TO B/O ROOF DECK.
12. 2 1/2" MTL STUD FURRING, MIN. REFER TO SHT A-601 PARTITION SCHEDULE.
13. INTERIOR SHEATHING. REFER TO SHT A-601 PARTITION SCHEDULE.
14. INTERIOR CEILING TILE AS SCHEDULED.
15. STL ROOF JOIST, SEE STRUCTURAL.
16. MTL ROOF DECK, SEE STRUCTURAL.
17. ROOF INSULATION (R-25ci MIN)(R-30ci MIN).
18. FLEXIBLE VAPOR RETARDER WITH COMPRESSIBLE INSUL @ ROOF DECK EDGE.
19. SINGLE-PLY ROOF MEMBRANE. EXTEND FLASHING MEMBRANE UP BACK OF PARAPET TO WALL CAP AND SECURE.
20. PRE-FINISHED BRANDING STRIPES. COORD W/ VENDOR.
21. FOAM STUCCO HEADER. SEE DETAIL.
22. FOAM STUCCO CORNICE. SEE DETAIL.
23. METAL FASCIA W/ RETAINER.
24. PREFIN MTL CAP COPING W/ 1" STANDING SEAM END JOINTS.
25. PROPOSED SIGNAGE LOCATION (BY OTHER). GC TO PROVIDE J-BOX AND CONDUIT FOR ELEC CONNECTION (SEE ELEC). COORDINATE FINAL LOCATION W/ SIGN VENDOR.
26. NOT USED.
27. CANTILEVERED CANOPY W/ INTEGRAL LIGHTING. SEE ALSO STRUCTURAL.
28. RECESSED CANOPY LIGHTING. SEE ALSO ELEC.
29. OVERHEAD DOOR AND TRACK BEYOND.
30. 1/4" X 4 1/4" S-HOOKS TO BE INSTALLED AT EA SIDE OF ALL OH DOOR LOCATIONS. SAFETY CHAINS TO BE PROVIDED BY OWNER.
31. PAINT CMU OH DOOR JAMBS TO MATCH ADJACENT FACE.
32. TRENCH DRAIN. SEE PLUMBING. SEE ALSO STRUCT.
33. SLOPED CONC SLAB. SEE STRUCT.
34. CONCRETE APRON AT OH DOORS.

Order Plans @ WWW.LDILine.com

PROTOTYPE TEMPLATE:

NORTHLAKE
v.2020.1.08.TKD

PROJECT INFORMATION:

KINGDOM TIRE

STORE # 945
10520 COLONIAL BLVD
FT MEYERS, LEE COUNTY, FLORIDA

95% REVIEW SET
18 AUGUST 2020

PROJECT NO.: 2020-0095
DRAWN BY: BMT
CHECKED BY: EKB

ISSUE	DATE
PERMIT PLAN REVIEW	11-AUG-2020

REVISION	DATE

SHEET TITLE:

WALL SECTIONS

SHEET NUMBER:

A-301