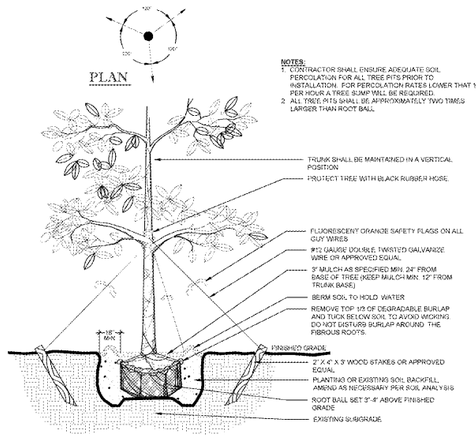

NOTES:
1. CONTRACTOR SHALL ENSURE ADEQUATE SOIL PERCOLATION FOR ALL TREE PITS PRIOR TO INSTALLATION. FOR PERCOLATION RATES LOWER THAT 1" PER HOUR A TREE SUMP WILL BE REQUIRED.
2. ALL TREE PITS SHALL BE APPROXIMATELY TWO TIMES LARGER THAN ROOT BALL.

1 CANOPY TREE
SCALE: NTS

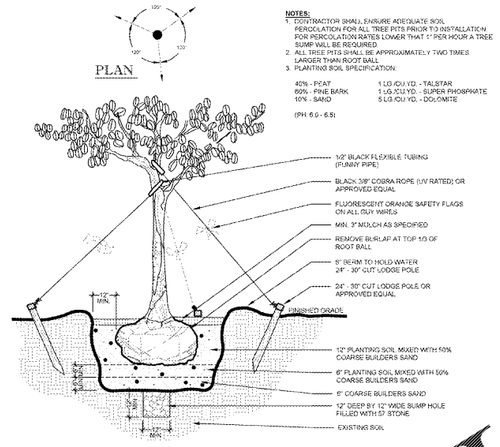

NOTES:
1. CONTRACTOR SHALL ENSURE ADEQUATE SOIL PERCOLATION FOR ALL TREE PITS PRIOR TO INSTALLATION FOR PERCOLATION RATES LOWER THAT 1" PER HOUR A TREE SUMP WILL BE REQUIRED
2. ALL TREE PITS SHALL BE APPROXIMATELY TWO TIMES LARGER THAN ROOT BALL
3. PLANTING SOIL SPECIFICATION:

40% - PEAT — 1 LB./CU.YD. - TALSTAR
60% - PINE BARK — 1 LB./CU.YD. - SUPER PHOSPHATE
10% - SAND — 5 LB./CU.YD. - DOLOMITE

(PH: 6.0 - 6.5)

2 MAGNOLIA TREE
SCALE: NTS

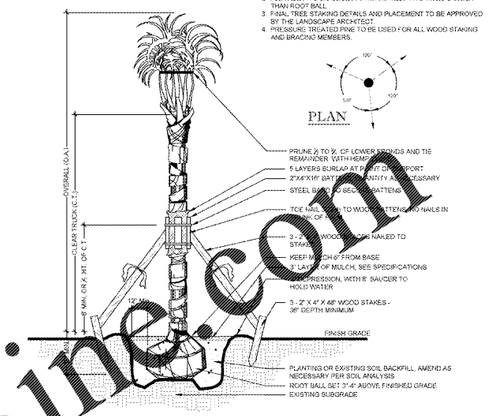

NOTES:
1. CONTRACTOR SHALL ENSURE FREE DRAINAGE/PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
2. ALL TREE PITS SHALL BE APPROXIMATELY TWO TIMES LARGER THAN ROOT BALL.
3. FINAL TREE STAKING DETAILS AND PLACEMENT TO BE APPROVED BY THE LANDSCAPE ARCHITECT.
4. PRESSURE TREATED PINE TO BE USED FOR ALL WOOD STAKING AND BRACING MEMBERS.

3 PALM TREE
SCALE: NTS

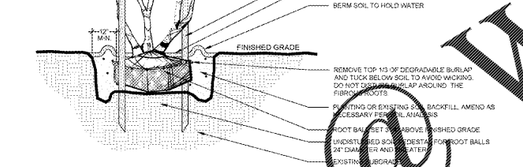

NOTES:
1. CONTRACTOR SHALL ENSURE FREE DRAINAGE/PERCOLATION OF ALL PLANTING PITS/BEDS PRIOR TO INSTALLATION.
2. ALL PLANTING PITS SHOULD HAVE VERTICAL SIDES AND BE APPROXIMATELY TWO TIMES LARGER THAN ROOT BALL.
3. PLANT MATERIAL SHALL BE INSTALLED 2" HIGH WITH SOIL MOUNDING UP TO THE TOP OF ROOT BALL.
4. WHERE GROUND COVERS ARE USED IN MASSES, THE ENTIRE BED SHALL BE EXCAVATED PRIOR TO RECEIVING PLANT MATERIAL AND PLANTING SOIL EXCEPT WHERE SPECIFIED.
5. ALL PLANT MATERIAL MASSES TO USE 'TRIANGULAR SPACING EXCEPT WHERE NOTED. REFER TO PLANT LIST FOR INDIVIDUAL PLANT SPACING'S.
6. PLANT MATERIAL INSTALLED ADJACENT TO STRAIGHT EDGES SHALL BE SPACED IN ROWS PARALLEL TO THE STRAIGHT EDGE. THOSE INSTALLED ADJACENT TO CURVED EDGES SHALL BE PLANTED IN ROWS PARALLEL TO THE CURVED EDGE

4 MULTI-STEM UNDERSTORY TREE
SCALE: NTS

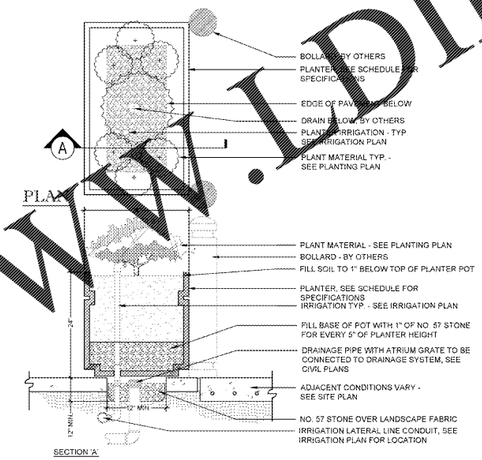

5 TYPICAL RAISED PLANTER DETAIL
SCALE: NTS

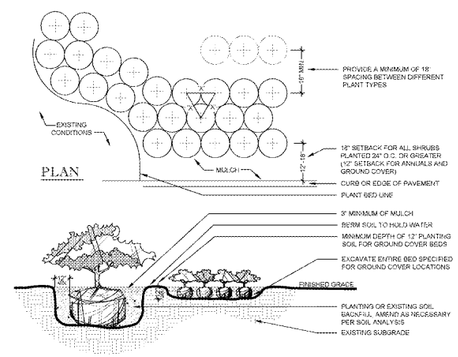

6 SHRUB AND GROUNDCOVER
SCALE: NTS



7 GRAVEL APPLICATION
SCALE: NTS

NOTES:
1. ALL MULCH SHALL BE PEST AND INSECT FREE.
2. COMPLETELY REMOVE EXISTING SOD AS REQUIRED PRIOR TO PLACING MULCH.



8 MULCH APPLICATION
SCALE: NTS



9 SOD APPLICATION
SCALE: NTS

Order Plans @ WWW.DILine.com

BOHLER ENGINEERING
SITE CIVIL AND LANDSCAPE ENGINEERING
LAND SURVEYING ◆ LANDSCAPE ARCHITECTURE
SUSTAINABLE DESIGN ◆ PERMITTING SERVICES ◆ TRANSPORTATION SERVICES
◆ UPSTATE NEW YORK ◆ SYRACUSE, NY
◆ BOSTON, MA ◆ PITTSBURGH, PA
◆ NEW YORK, NY ◆ LEHIGH VALLEY, PA
◆ NORTHERN NEW JERSEY ◆ SOUTHERN NEW JERSEY ◆ RALEIGH, NC ◆ CHARLOTTE, NC
◆ ATLANTA, GA ◆ AUSTIN, TX
◆ NORTHERN VIRGINIA ◆ TAMPA, FL
◆ CENTRAL VIRGINIA ◆ SOUTH FLORIDA
◆ RICHMOND, VA ◆ ORLANDO, FL
◆ WASHINGTON, DC ◆ RALEIGH, NC
THE INFORMATION SHOWN HEREON IS THE EXCLUSIVE PROPERTY OF BOHLER AND IS NOT TO BE USED IN WHOLE OR IN PART FOR ANY PROJECT OTHER THAN THE ONE FOR WHICH IT IS PREPARED WITHOUT THE WRITTEN CONSENT OF BOHLER. © 2016 BOHLER

REVISIONS

REV	DATE	COMMENT	BY
1	11/29/17	PER CITY COMMENTS	KS
2	03/19/18	PER CITY COMMENTS	ASZ

KNOW WHAT'S BELOW ALWAYS CALL 811 BEFORE YOU DIG
It's fast. It's free. It's the law
www.callsunshine.com

PERMIT SET

PROJECT No.:	PLT170084
DRAWN BY:	MR
CHECKED BY:	KS
DATE:	08/09/17
SCALE	AS SHOWN
CAD I.D.	LP0

PROJECT:
Wawa
FOR
BRIGHTWORK REAL ESTATE
LOCATION OF SITE
1004 EDGEWOOD AVE
JACKSONVILLE, FL 32254
CITY OF JACKSONVILLE

BOHLER ENGINEERING
3820 NORTHDALE BLVD., SUITE 300B
TAMPA, FLORIDA 33624
Phone: (813) 812-4100
Fax: (813) 812-4101
FLORIDA BUSINESS CERT. OF AUTH. No. 30760
LANDSCAPE ARCHITECT BUSINESS LIC. No LC26000551

SHEET TITLE:
PLANTING DETAILS

SHEET NUMBER:
LP-5.01