LEGEND

WALL RATINGS

- 1 HOUR FIRE RATED ASSEMBLY
- 2 HOUR FIRE RATED ASSEMBLY
- 3 HOUR FIRE RATED ASSEMBLY
- SMOKE PARTITION

SYMBOLS

- NORTH ARROW
- DETAIL KEY/ ENLARGED PLAN
- ELEVATION KEY
- SECTION KEY
- BUILDING SECTION KEY
- EXISTING PARTITION
- NEW PARTITION OR INFILL
- ROOM — ROOM NAME / ROOM NUMBER
- CEILING HEIGHT
- PARTITION TYPE
- DOOR NUMBER
- EQUIPMENT NUMBER
- GLAZING TYPE

GENERAL NOTES

1. ALL MAJOR DIMENSIONS AND VERTICAL ELEVATIONS ARE BASED ON SURVEY INFORMATION FOR THE EXISTING SITE AND CONTRACTOR MUST VERIFY PRIOR TO START OF CONSTRUCTION. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ARCHITECT'S ATTENTION IMMEDIATELY. THIS ALSO APPLIES WHERE ALIGNMENTS AND OTHER CRITICAL RELATIONSHIPS ARE INDICATED.

2. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES PRIOR TO START OF CONSTRUCTION. PROTECT ALL UTILITY LINES AGAINST DAMAGE DURING WORK. IF TEMPORARY INTERRUPTION OF SERVICES IS UNAVOIDABLE BEYOND THE LIMITS OF THE PROJECT, OWNER'S APPROVAL MUST BE OBTAINED PRIOR TO SUCH INTERRUPTION.

3. ALL WORK SHALL COMPLY WITH CURRENTLY ENFORCED EDITION OF NFPA 241, STANDARD FOR SAFEGUARDING CONSTRUCTION, ALTERATIONS AND DEMOLITION OPERATIONS.

4. PER NFPA 101.4.6.10.1.2014 EDITION, BUILDINGS OR PORTIONS OF BUILDINGS SHALL BE PERMITTED TO BE OCCUPIED DURING CONSTRUCTIONM REPAIR, ALTERATIONS OR ADDITIONS ONLY IF ALL REQUIRED EGRESS AND FIRE PROTECTION FEATURES ARE IN PLACE AND CONTINUALLY MAINTAINED FOR THE PORTION OCCUPIED. IF OWNER CHOOSES TO OCCUPY THE STRUCTURE DURING CONSTRUCTION THE CONTRACTOR WILL BE REQUIRED TO MAINTAIN EGRESS AND ALL FIRE PROTECTION MEASURES.

5. PATCH AND FINISH WALLS AS REQUIRED BEFORE PAINTING.

6. DEMOLISH IN AN ORDERLY AND CAREFUL MANNER. PROTECT EXISTING MATERIALS DESIGNATED TO REMAIN. REMOVE DEMOLISHED MATERIAL FROM SITE, EXCEPT WHERE SPECIFICALLY NOTED OTHERWISE. UPON COMPLETION OF WORK, LEAVE AREAS IN CLEAN CONDITION.

7. DELIVER SALVAGEABLE ITEMS TO STORAGE AS DIRECTED BY OWNER'S REPRESENTATIVE.

8. DAMAGE TO EXISTING UTILITIES RESULTING IN AN INTERRUPTION OF SERVICE TO SAFETY AND SECURITY SYSTEMS, INCLUDING BUT NOT LIMITED TO FIRE ALARM, PHONE SERVICES, BUILDING SPRINKLERS, OR WALKWAY LIGHTING MUST BE REPAIRED WITHIN 24 HOURS UNLESS OTHERWISE AGREED BY OWNER.

9. UNLESS OTHERWISE NOTED, DIMENSIONS ARE GIVEN TO FACE OF STUD OR CMU.

UNIVERSITY OF WEST GEORGIA

UWG 10-19097 MARTHA MUNRO ENVELOPE RENOVATION

FLYNN · FINDERUP
ARCHITECTS

CONSTRUCTION DOCUMENTS

© 2020, PFF INC.

DRAWING LIST

COVER SHEET

A2.1 FIRST FLOOR PLAN
A2.2 SECOND FLOOR PLAN
A2.3 ROOF PLAN
A3.1 NORTH ELEVATION
A3.2 SOUTH ELEVATION
A3.3 EAST ELEVATION
A3.4 WEST ELEVATION
A5.1 DETAILS
A5.2 ROOF DETAILS
A6.1 SCHEDULES

SITE MAP

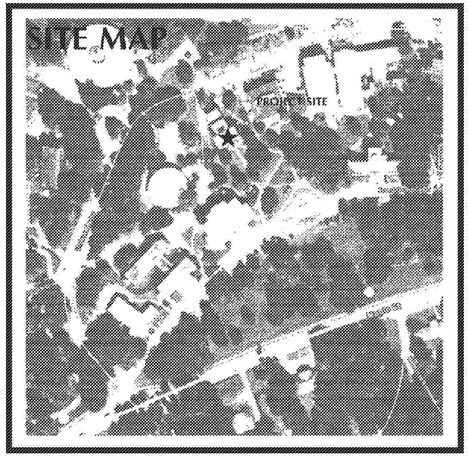

1916

09.16.20

UWG 10-19097
MARTHA MUNRO
ENVELOPE RENOVATION

FLYNN · FINDERUP
ARCHITECTS
3330 CUMBERLAND BOULEVARD, SUITE 500, ATLANTA, GA 30339; PHONE: 770-859-0029; WWW.FFARCHITECTS.COM

STATE OF GEORGIA
GEORGE M. FLYNN
9-16-20
CERTIFICATE No. 5597
REGISTERED ARCHITECT

SET NO.

ISSUED FOR CONSTRUCTION

Order Plans @ WWW.LDILine.com