DOOR SCHEDULE

DOOR NO.	ROOM NO.	ROOM NAME	TYPE	WIDTH	HEIGHT	MATL	FINISH	FRAME	FINISH	RATING	HW SET	REMARKS
001		NOT USED										
002	B1	Mechanical	EX			HM	PTD	HM	PTD	NA		Existing to remain
003	B2	Crawl Space	EX			HM	PTD	HM	PTD	NA		Existing to remain
101	101	Corridor	HGX	5'-0"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, ADA access control, existing transom
102		NOT USED										
103	102	CAD Lab	HG	3'-0"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, Transom
104	108	Prep Room	FP	3'-0"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, Across control
105		NOT USED										
106		NOT USED										
107		NOT USED										
108		NOT USED										
109		NOT USED										
110	105	Acting Lab	HG	3'-0"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, Exit Device
111	105	Acting Lab	HG	3'-2"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, Exit Device
201		NOT USED										
202		NOT USED										
205		NOT USED										
204		NOT USED										
205		NOT USED										
206		NOT USED										
207		NOT USED										
208		NOT USED										
209	204B	Conf. Support Room										Existing door to be removed
210	205	Conference Room										Existing door to be removed
211	201	Hall	HG	3'-0"	7'-0"	ALWD	PREF	ALWD	PREF	NA	Note 6	Closer, Exit Device

ABBREVIATIONS

ALWD	Aluminum Clad Wood
EX	Existing
FP	Full Panel
HG	Half Glass
HGX	Half Glass Special
PREF	Prefinished
PTD	Painted

NOTES

1. ALL DOOR LITES ARE UNDIVIDED
2. PROVIDE SDL GRILLES FOR ALL TRANSOM AND SIDELITE UNITS
3. DIMENSIONS GIVEN ARE APPROXIMATE NOMINAL OPENINGS
4. ALL DOOR GLASS SHALL MATCH WINDOWS IN COLOR AND PERFORMANCE
5. PROVIDE PREHUNG DOORS WITH BALL BEARING HINGES AND WEATHERSTRIPPING
6. SEE PROJECT MANUAL SECTION 087100 ALLOWANCES FOR HARDWARE REQUIREMENTS

DOOR TYPES



FP HG HG

WINDOW SCHEDULE

TYPE	FRAME	WIDTH	HEIGHT	MATL	FINISH	LITES	GLASS	REMARKS
A	DH	3'-5"	6'-8 3/4"	ALWD	PREF	8/8	INS	
B	DH	3'-8"	5'-1 3/4"	ALWD	PREF	8/8	INS	
C	DH	3'-10"	13'-7 1/4"	ALWD	PREF	8/8-3/8	INS	Transom Unit
D	DH	7'-4"	13'-7 1/4"	ALWD	PREF	8/8-3/8	INS	Transom Unit
E	DH	3'-8"	5'-8"	ALWD	PREF	8/8	INS	
F	DH	7'-8"	5'-8"	ALWD	PREF	8/8	INS	Pair of E Type Units
G	DH	9'-8"	10'-0"	ALWD	PREF	8/8	INS	Kneewall Panel
H	DH	4'-5"	6'-8 3/4"	ALWD	PREF	12/8	INS	
K	DH	2'-4"	3'-1 3/4"	ALWD	PREF	2/2	INS	

ABBREVIATIONS

ALWD	Aluminum clad wood
DH	Double Hung
PREF	Prefinished
INS	Low-E Insulating

NOTES

1. ALL WINDOW LITES ARE 12X14 INCHES
2. PROVIDE SDL GRILLES, BOTH SIDES OF ALL UNITS
3. DIMENSIONS GIVEN ARE APPROXIMATE BRICK ROUGH OPENINGS
4. CAREFULLY REMOVE AND REUSE ALL INTERIOR TRIM, WITH MINIMUM DAMAGING TO ADJACENT PLASTER
5. PROVIDE P.T. BLOCKING AS REQUIRED AFTER REMOVAL OF ORIGINAL WEIGHTS AND POCKETS.
6. DISPOSE OF LEAD WEIGHTS IN ACCORDANCE WITH EPA GUIDELINES

WINDOW TYPES

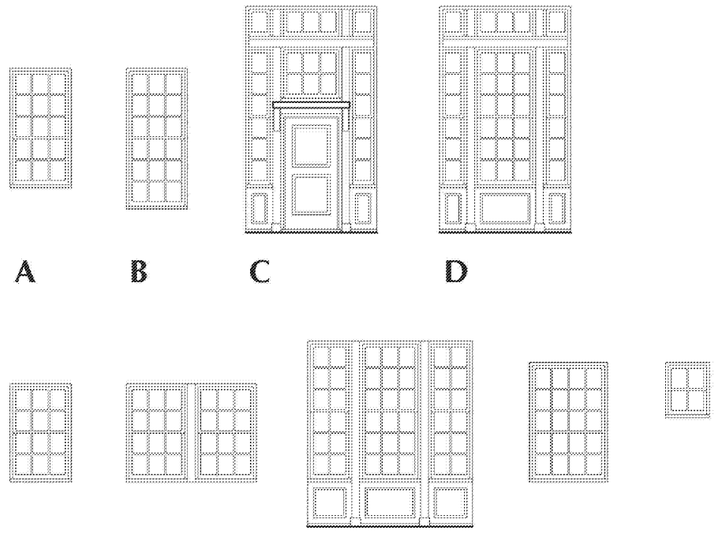

A B C D

E F G H K

Order Plans @ WWW.LDILine.com

1916

09.16.20

UWG 10-19097
MARTHA MUNRO
ENVELOPE RENOVATION

FLYNN • FINDERUP ARCHITECTS
3598 CUMBERLAND BOULEVARD, SUITE 380, ATLANTA, GA 30339; PHONE: 770-859-0024; WWW.FFARCHITECTS.COM

STATE OF GEORGIA
GEORGE B. FLYNN
9-16-20
CERTIFICATE NO. 20161
REGISTERED ARCHITECT

A6.1

ISSUED FOR CONSTRUCTION