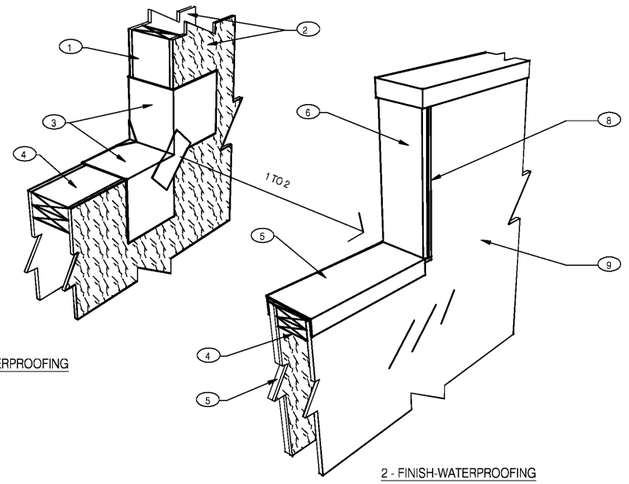


1 - PRE-WATERPROOFING

2 - FINISH-WATERPROOFING

NOTES

1. 2X WOOD STUDS
2. PLYWOOD SUBSTRATE FOR EXTERIOR WALLS
3. FLASHING TAPE AT ALL VERTICAL PARAPET TRANSITIONS. EXTEND TAPE 12" OUTWARD AND UPWARD FROM CORNER AS SHOWN. LAP CORNERS WITH ANGLED TAPE AS SHOWN TO INSURE FULL COVERAGE AT CORNERS
4. DOUBLE 2X TOP PLATE.
5. PAINTED 24 GAUGE PARAPET COPING. SLOPE 1/4:1 TOWARDS ROOF WITH FIBER CANT STRIPS UNDER COPING. LAP FRONT AND BACK EDGE 2" DOWN VERTICAL FACE. LAP EXPOSED COPING EDGE EXPOSED ENDS AT VERTICAL PARAPET TRANSITION.
6. WRAP EXTERIOR FINISH MATERIAL ONTO VERTICAL FACE OF PARAPET TRANSITION. SEE EXTERIOR ELEVATIONS.
7. EXTERIOR FINISH MATERIAL AS NOTED ON EXTERIOR ELEVATIONS ON SHEET A4.0
8. TERMINATION BAR AT VERTICAL TRANSITION OF EXTERIOR FINISH MATERIAL AND MEMBRANE ROOFING. SEAL VERTICAL GAP BETWEEN TERMINATION BAR AND EXTERIOR FINISH PER ROOFING MANUFACTURER SPECIFICATIONS.
9. PVC ROOFING MEMBRANE ON BACKSIDE OF PARAPET.

IMPORTANT : ONLY FASTEN PARAPET COPING ALONG THE FRONT AND BACK VERTICAL EDGE. NEVER ON TOP OF COPING.

**PARAPET CAP & TRANSITION** 1" = 1'-0" | 13




**JAMB @ SERVICE DOOR** 3" = 1'-0" | 9




NOTE: SEE DETAIL 16/A6.1 FOR ADDITIONAL INFORMATION REGARDING WATER PROOFING AT AND NEAR WINDOWS / DOORS

**WINDOW SILL @ DRIVE THRU** 3" = 1'-0" | 5

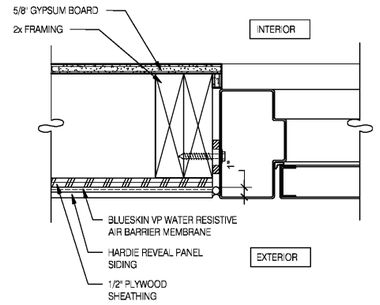


**TYPICAL WINDOW HEAD** 3" = 1'-0" | 1

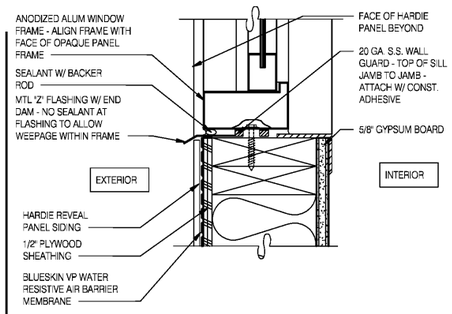


**STOREFRONT DOOR SILL** 3" = 1'-0" | 10

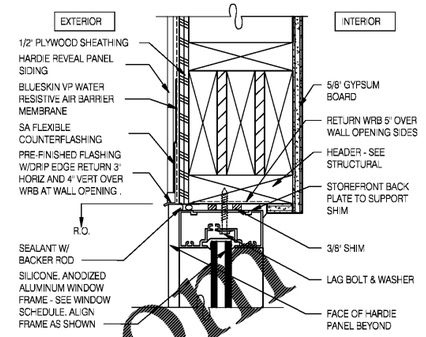


**WINDOW JAMB @ DRIVE THRU** 3" = 1'-0" | 6

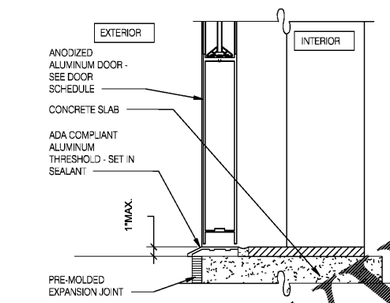


NOTE: SEE DETAIL 16/A6.1 FOR ADDITIONAL INFORMATION REGARDING WATER PROOFING AT AND NEAR WINDOWS / DOORS

**TYPICAL WINDOW SILL** 3" = 1'-0" | 2

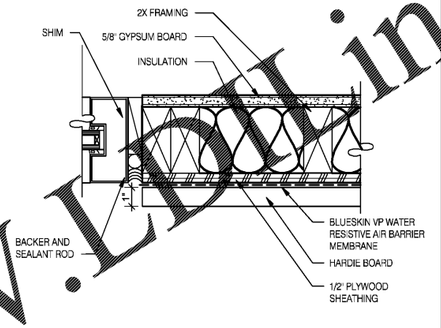


**DOOR JAMB** 3" = 1'-0" | 16

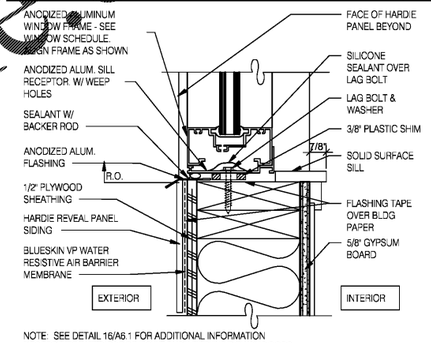


**TYPICAL WINDOW HEAD W/ CANOPY** 3" = 1'-0" | 14

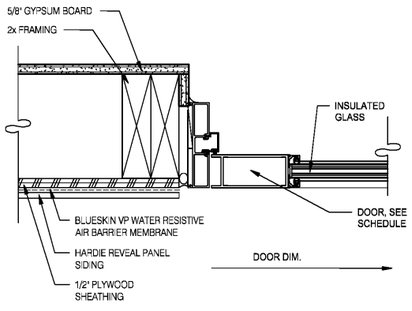


**CONNECTION THRU EXIST. FINISH** 3" = 1'-0" | 11

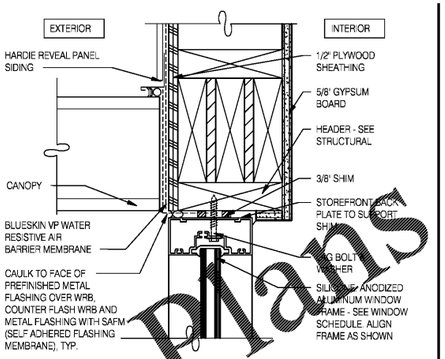


**HEAD/ JAMB @ SERVICE DOOR** 3" = 1'-0" | 7

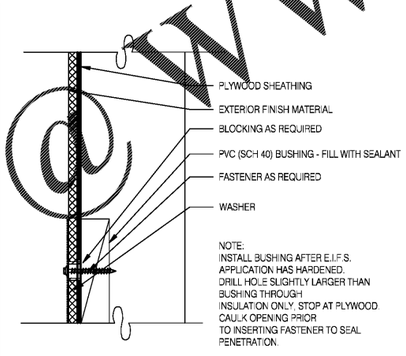


NOTE: SEE DETAIL 16/A6.1 FOR ADDITIONAL INFORMATION REGARDING WATER PROOFING AT AND NEAR WINDOWS / DOORS

**TYPICAL WINDOW JAMB** 3" = 1'-0" | 3

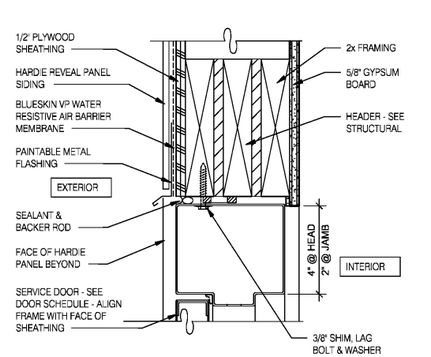


**CO2 FILL / J-BOX** 17

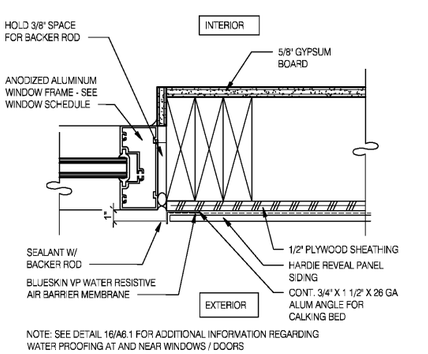


**HOSE BIB BOX** 12

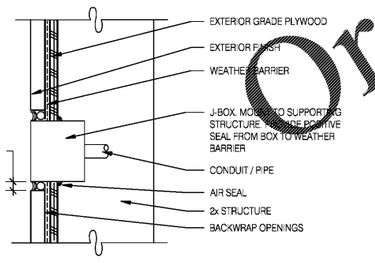


NOTE: SEE FLOOR FINISH PLAN FOR FLOOR FINISHES

**THRESHOLD @ SERVICE DOOR** 8

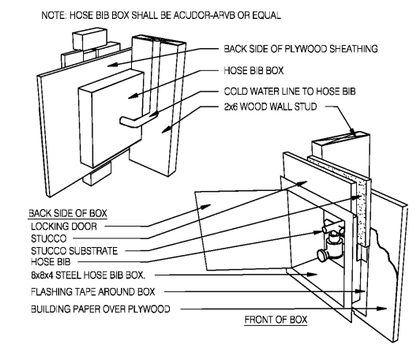


**WINDOW HEAD @ DRIVE THRU** 1 1/2" = 1'-0" | 4

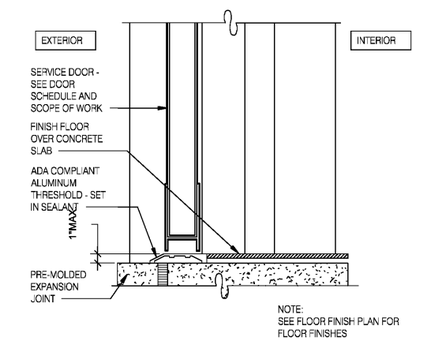Order Plans@WWW.LBLine.com

FREDERICK J. GOGLIA
ARCHITECT, NCARB, RDI
1950 CRAIG ROAD, SUITE 300 ST. LOUIS, MO 63146
PH. (314) 415-2400 FAX (314) 415-2300 www.arcv.com

| | |
|---|---|
| CONTRACT DATE: | 11/17/20 |
| BUILDING TYPE: | ENDEAVOR MED 40 |
| PLAN VERSION: | SEPT 2020 |
| BRAND DESIGNER: | 200109 |
| SITE NUMBER: | 297222 |
| STORE NUMBER: | 003717 |
| ARCVISION: | 200188 |

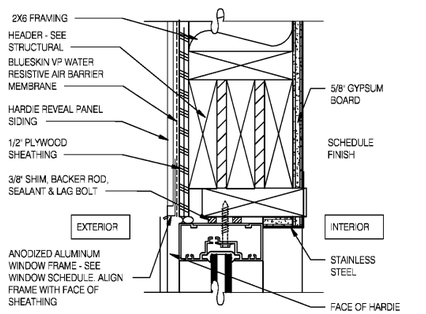TACO BELL

6151 HWY 278 NW
COVINGTON, GA 30014

ENDEAVOR
"GO MOBILE"

# CONSTRUCTION DETAILS DOOR/WINDOW

# A6.1