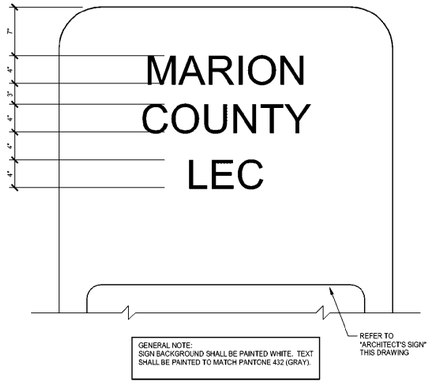

TEXT LAYOUT ELEVATION

1 1/2" = 1'-0"

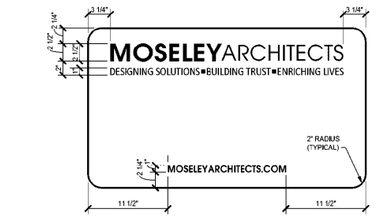

SIZE: 1'-11" VERTICAL x 3'-4" HORIZONTAL

NOTES:
"MOSELEY" TEXT IN LOGO AND WEB ADDRESS IS PMS 485. BULLETS ARE PMS 485, ALL OTHER TEXT AND BORDER IS PMS 432. BACKGROUND IS WHITE.

FONT FOR "DESIGNING SOLUTIONS BUILDING TRUST ENRICHING LIVES" TEXT IS CALIBRI, ALL OTHER TEXT IS AVANTGARDE FONT.

ARCHITECT'S SIGN

1 1/2" = 1'-0"

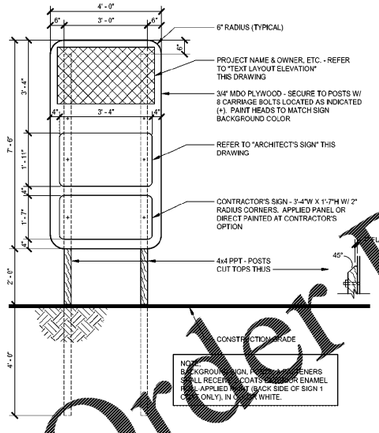

PROJECT SIGN ELEVATION

1/2" = 1'-0"

ARCHITECTURAL ABBREVIATIONS

A-PT	ACCENT PAINT
ABS	AIR BARRIER SYSTEM
ABV	ABOVE
ACP	ACOUSTICAL CEILING PANEL
ACT	ACOUSTICAL CEILING TILE
ACW	ALUMINUM CLAD WINDOW
ADJ	ADJUSTABLE
AFF	ABOVE FINISHED FLOOR
AHJ	AUTHORITY HAVING JURISDICTION
AHU	AIR HANDLING UNIT
ALT	ALTERNATE
ALUM	ALUMINUM
AP	ACCESS PANEL
APC	ARCHITECTURAL PRECAST CONCRETE
ARC	ABUSE RESISTANT COATING
AS	ALUMINUM STOREFRONT
AUTC	AUTOMATIC
AVG	AVERAGE
AW	ALUMINUM WINDOW
AWC	ACOUSTICAL WALL COVERING
AWP	ACOUSTICAL WALL PANEL
BD	BOARD
BF	BARRIER FREE (ADA or A117.1)
BLDG	BUILDING
BLKG	BLOCKING
BOT	BOTTOM
BRG	BEARING
BTWN	BETWEEN
BUR	BUILT-UP ROOF
C	CARPET
C-TILE	CARPET TILE
CAB	CABINET
CB	CHALKBOARD
CCTV	CLOSED CIRCUIT TELEVISION
CEM	CEMENT
CFSF-NS	COLD FORMED STEEL FRAMING, NON-STRUCTURAL
CFSF-S	COLD FORMED STEEL FRAMING, STRUCTURAL
CG	CORNER GUARD
CI	CONTINUOUS INSULATION
CIPC	CAST IN PLACE CONCRETE
CJ	CONTROL JOINT
CL	CLOSET
CLG	CEILING
CLR	CLEAR
CM	CENTIMETER
CMBD	CEMENT BOARD
CMU	CONCRETE MASONRY UNIT
CMU-A	CONCRETE MASONRY UNIT - ACOUSTICAL
CMU-GF	CONCRETE MASONRY UNIT - GROUND FACE
CMU-GLZ	CONCRETE MASONRY UNIT - GLAZED
CMU-SPLF	CONCRETE MASONRY UNIT - SPLIT FACE
CO	CLEANOUT
COL	COLUMN
CONC	CONCRETE
CONC-LH	CONCRETE WITH LIQUID HARDENER
CONC-PMT	CONCRETE WITH PIGMENT
CONC-POL	CONCRETE WITH POLISH
CONC-SLR	CONCRETE WITH SEALER
CONC-ST	CONCRETE WITH STAIN
CONST	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
CORR	CORRIDOR
CSMU	CAST STONE MASONRY UNIT
CT	CERAMIC TILE
CTSK	COUNTERSINK, COUNTERSUNK
CU FT	CUBIC FEET / FOOT
CUST	CUSTODIAN / CUSTODIAL
CW	ALUMINUM CURTAIN WALL
CWFD	CEMENTITIOUS WOOD FIBER DECK
D	DEPTH/DEEP
DBL	DOUBLE
DEMO	DEMOLITION
DETE	DETENTION
DF	DRINKING FOUNTAIN
DG	DOOR GRILLE
DHM	DETENTION HOLLOW METAL
DIA	DIAMETER
DIAG	DIAGONAL
DIM	DIMENSION
DIV	DIVISION
DL	DOOR LOUVER
DN	DOWN
DP	DAMPPROOFING
DR	DISPLAY RAIL
DS	DOWNSPOUT
DTL	DETAIL
DWG	DRAWING
DWR	DRAWER
EA	EACH
EF	EXHAUST FAN
EFS	EXTERIOR FINISH SYSTEM
EIFS	EXTERIOR INSULATION & FINISH SYSTEM
EJ	EXPANSION JOINT
EL	ELEVATION
ELAS	ELASTOMERIC
ELEC	ELECTRICAL
ELEV	ELEVATOR
EMER	EMERGENCY
EPS	EXPANDED POLYSTYRENE
EQ	EQUAL
EQUIP	EQUIPMENT
ETR	EXISTING TO REMAIN
EWC	ELECTRIC WATER COOLER
EX	EXISTING
EXH	EXHAUST
EXP	EXPANSION
EXPC	EXPOSED CONSTRUCTION
EXT	EXTERIOR
FAAF	FLUID APPLIED ATHLETIC FLOORING
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEB	FIRE EXTINGUISHER BRACKET
FEC	FIRE EXTINGUISHER CABINET
FF	FINISHED FLOOR
FGL	FIBERGLASS
FH	FIRE HYDRANT
FHC	FIRE HOSE CABINET
FHVC	FIRE HOSE VALVE CABINET
FIN	FINISHED
FLR	FLOOR
FLRG	FLOORING
FND	FOUNDATION
FO	FACE OF
FRM	FRAME
FRP	FIBERGLASS REINFORCED PLASTIC
FRT	FIRE RETARDANT TREATED
FT	FOOT, FEET
FTG	FOOTING
FURN	FURNITURE
FVC	FIRE VALVE CABINET
FWC	FABRIC WALL COVERING
GA	GAUGE
GAL	GALLON
GALV	GALVANIZED
GB	GYPSUM BOARD
GB-AR	GYPSUM BOARD - ABUSE RESISTANT
GB-IR	GYPSUM BOARD - IMPACT RESISTANT
GB-S	GYPSUM BOARD - SECURITY
GFRC	GLASS FIBER REINFORCED CONCRETE
GFRG	GLASS FIBER REINFORCED GYPSUM
GL	GLASS, GLAZING
GL-BLK	GLASS BLOCK
GPM	GALLONS PER MINUTE
GRT	GROUT
GSFT	GLAZED STRUCTURAL FACING TILE
GT	GLASS TILE
GWT	GLAZED WALL TILE
GYP	GYPSUM
H	HIGH
HB	HOSE BIBB
HBD	HARDBOARD
HDC	HOLD DOWN CLIPS
HDNR	HARDENER
HDWD	HARDWOOD
HDWR	HARDWARE
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HPC	HIGH PERFORMANCE COATINGS
HPFP	HIGH PERFORMANCE FLOOR PAINT
HT	HEIGHT
HVAC	HEATING, VENTILATING, AIR CONDITIONING
ID	INSIDE DIAMETER
IN	INCH, INCHES
INCL	INCLUDE, INCLUDING
INFO	INFORMATION
INST	INSTALLATION
INSUL	INSULATION
INT	INTERIOR
IRWC	IMPACT RESISTANT WALL COVERING
IWB	INTERACTIVE WHITE BOARD
JAN	JANITOR
JCT	JUNCTION
JT	JOINT
L	LENGTH/LONG
LAB	LABORATORY
LAHJ	LOCAL AUTHORITY HAVING JURISDICTION
LAM	LAMINATE
LAV	LAVATORY
LH	LEFT HAND
LIN	LINOLEUM
LKR	LOCKER
LMC	LINEAR METAL CEILING
LPS	LAMINATE PANEL SYSTEM
LT	LIGHT
LVR	LOUVER
M	METER
MACH	MACHINE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MB	MARKERBOARD
MCM	METAL COMPOSITE MATERIAL
MCP	METAL CEILING PANEL
MDO	MEDIUM DENSITY OVERLAY
MECH	MECHANICAL
MED	MEDIUM
MEMB	MEMBRANE
MFR	MANUFACTURER
MIF	MULTICOLOR INTERIOR FINISHING
MIN	MINIMUM
MIR	MIRROR
MISC	MISCELLANEOUS
MLDG	MOLDING
MO	MASONRY OPENING
MPS	MANUAL PROJECTION SCREEN
MR	MAP RAIL
MT	MOUNT
MTD	MOUNTED
MTL	METAL
NA	NOT APPLICABLE
NIC	NOT IN CONTRACT
NO.	NUMBER
NOM	NOMINAL
NRC	NOISE REDUCTION COEFFICIENT
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFCI	OWNER FURNISHED CONTRACTOR INSTALLED
OPNG	OPENING
OPP HD	OPPOSITE HAND
OVHD	OVERHEAD
P-TILE	PORCELAIN TILE
PC	PRECAST
PERF	PERFORATED, PERFORATION(S)
PERIM	PERIMETER
PC	POURED CONCRETE
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PLWD	PLASTIC LAMINATE WOOD
PLYWD	PLYWOOD
PNL	PANEL, PANELING
POLY	POLYETHYLENE
PPS	POWER PROJECTION SCREEN
PPT	PRESSURE- OR PRESERVATIVE-TREATED
PR	PAIR
PREFAB	PREFABRICATED
PRFIN	PREFINISHED
PREP	PREPARE / PREPARATION
PS	PROJECTION SCREEN
PSD	PENCIL SHARPENER BLOCK
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PT	PAINT
PTN	PARTITION
PTS	PNEUMATIC TUBE SYSTEM
PVC	POLYVINYL CHLORIDE
PVMT	PAVEMENT
PVWC	PERFORATED VINYL WALL COVERING
QSM	QUARTZ SURFACING MATERIAL
QT	QUARRY TILE
QTY	QUANTITY
R	RISER, RADIUS
R/W	RIGHT OF WAY
RAD	RADIUS
RAF	RESILIENT ATHLETIC FLOORING
RB	RESILIENT BASE
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REFG	REFRIGERATOR
REINF	REINFORCING, REINFORCE(D)
REM	RECESSED ENTRY MAT
REQ'D	REQUIRED
RES	RESINOUS FLOORING
RFT	RUBBER FLOOR TILE
RH	RIGHT HAND
RL	RAIN LEADER
RM	ROOM
RO	ROUGH OPENING
RSF	RUBBER SHEET FLOORING
RSR	RESILIENT STAIR RISER
RST	RESILIENT STAIR TREAD
RT	RIGHT
RTU	ROOFTOP UNIT
SAB	SOUND ATTENUATION BLANKET
SC-PLK	SECURITY CEILING PLANK
SC-PNL	SECURITY CEILING PANEL
SCH	SCHEDULE
SF	SQUARE FEET / FOOT
SFRM	SPRAYED FIRE RESISTANT MATERIAL
SHM	SECURITY HOLLOW METAL
SHTG	SHEATHING
SIM	SIMILAR
SPEC	SPECIFICATION
SPF	SPRAYED POLYURETHANE FOAM
SPR	SPRINKLER
SQ	SQUARE
SQ FT	SQUARE FEET / FOOT
SRD	SECONDARY ROOF DRAIN
SS	STAINLESS STEEL
SSM	SOLID SURFACE MATERIAL
ST	STREET
STC	SOUND TRANSMISSION COEFFICIENT
STD	STANDARD
STL	STEEL
STRUCT	STRUCTURAL
SUSP	SUSPENDED
SV	SHEET VINYL
SWM	SECURITY WOVEN MESH / WOVEN ROD
SYM	SYMMETRICAL
T	TREAD
T&G	TONGUE & GROOVE
T.O.	TOP OF
TB	TACKBOARD
TEL	TELEPHONE
TERR-C	TERRAZZO CEMENTITIOUS
TERR-E	TERRAZZO EPOXY
TERR-R	TERRAZZO RUBBERIZED
THRD	THRESHOLD
THK	THICKNESS, THICK
TOS	TOP OF STEEL
TOW	TOP OF WALL
TS	TACK STRIP
TV	TELEVISION
TYP	TYPICAL
UC	UNDERCUT
UG	UNDERGROUND
UH	UNIT HEATER
UNO	UNLESS NOTED (INDICATED) OTHERWISE
VAT	VINYL ASBESTOS TILE
VB	VAPOR BARRIER
VCT	VINYL COMPOSITION TILE
VDB	VISUAL DISPLAY BOARD
VERT	VERTICAL
VEST	VESTIBULE
VFCT	VINYL FREE COMPOSITION TILE
VFWC	VINYL FREE WALLCOVERING
VR	VAPOR RETARDER
VT	VINYL TILE
VTR	VENT THROUGH ROOF
VWC	VINYL WALL COVERING
W	WIDE, WIDTH
W	WITH
W/O	WITHOUT
WC	WATER CLOSET
WCP	WOOD CEILING PANEL
WD	WOOD
WDW	WINDOW
WP	WATERPROOFING
WPT	WORKING POINT
WSCT	WAINSCOT
WSF	WOOD SPORTS FLOORING
WT	WEIGHT
WWF	WELDED WIRE FABRIC
XPS	EXTRUDED POLYSTYRENE

KEYNOTES

- x — KEYNOTE (1 TO 2 DIGITS)
- nn — KEYNOTE (3 DIGITS ONLY)
- x "nn" — SIZE; THICKNESS; OR OTHER DESCRIPTIVE INFORMATION

1. KEYNOTES ARE GENERALLY ASSOCIATED WITH A SERIES OF DRAWINGS (e.g., A3.2.n, A5.1.n); THEREFORE KEYNOTE NUMBERS FROM SERIES TO SERIES WILL VARY (i.e., KEYNOTE NO. 1 IN THE A3.2.n SERIES WILL BE DIFFERENT FROM KEYNOTE NO. 1 IN THE A5.1.n SERIES).

ARCHITECTURAL GRAPHIC SYMBOL LEGEND

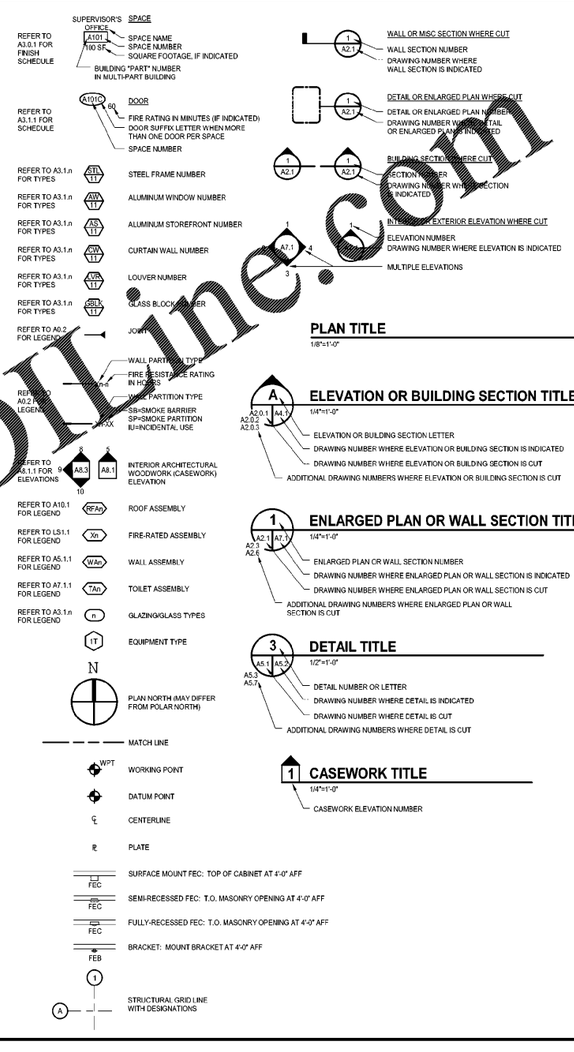

ARCHITECTURAL GENERAL NOTES

A. THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE 'THE GREATER QUANTITY OF WORK.

B. ELEMENTS THAT ARE IDENTIFIED BY OTHER DISCIPLINES (e.g., CIVIL, STRUCTURAL, PLUMBING, FIRE PROTECTION, MECHANICAL, ELECTRICAL) ELSEWHERE WITHIN THE ARCHITECTURAL SERIES OF DRAWINGS AND/OR SPECIFICATIONS, OR IDENTIFIED OR COVERED BY DEFAULTS (e.g., SIZES, THICKNESS, SPACING, MATERIALS) IN THE SPECIFICATIONS MAY NOT BE ANNOTATED (NOTE OR KEYNOTED) ON THESE DRAWINGS.

C. ELEMENTS IDENTIFIED IN "LEGENDS" AND/OR "GENERAL NOTES" MAY NOT BE NOTED IN DETAILS, OR SECTIONS, AS THESE ELEMENTS ARE IDENTIFIED IN THE LEGENDS (e.g. FACE BRICK, CMU, WINDOWS)

D. REFER TO "ASSEMBLIES" FOR MATERIALS AND COMPONENTS THAT MAKE UP THAT PARTICULAR ASSEMBLY (e.g., EXTERIOR WALL ASSEMBLIES, ROOF ASSEMBLIES, AND FIRE-RATED ASSEMBLIES). ONCE A PARTICULAR ASSEMBLY HAS BEEN IDENTIFIED ON ONE DRAWING, THAT SAME ASSEMBLY GRAPHIC SHALL APPLY TO ALL OTHER SIMILAR LOCATIONS UNLESS SPECIFICALLY INDICATED OTHERWISE. PROVIDE THAT SAME ASSEMBLY AT THE SIMILAR LOCATION WHETHER THE ASSEMBLY GRAPHIC SYMBOL IS SHOWN OR NOT.

E. VERIFY ALL DIMENSIONS, INCLUDING DIMENSIONS ON STRUCTURAL DRAWINGS AND OTHER ARCHITECTURAL DRAWINGS. IMMEDIATELY NOTIFY ARCHITECT OF ANY DISCREPANCIES.

F. PROVIDE CONCRETE HOUSEKEEPING PADS FOR ALL EQUIPMENT INDICATED TO BE MOUNTED OR OTHERWISE REQUIRED TO BE MOUNTED TO THE FLOOR. WHERE PADS ARE NOT SHOWN, PROVIDE 6" THICK CONCRETE PADS W/ 3/4" CHAMFERED EDGES (ALL SIDES). REINFORCE WITH MESH EQUIVALENT TO FLOOR SLAB REINFORCING REQUIREMENTS.

ARCHITECTURAL MATERIALS LEGEND

- EARTH
- POROUS FILL
- CONCRETE
- FACE BRICK
- SPLIT-FACE BLOCK
- CONCRETE MASONRY UNIT
- GROUTED SOLID CONCRETE MASONRY UNIT

NOTE: PROVIDE 100% SOLID, PLANT-CAST UNITS WHERE CORE HOLES WOULD BE VISIBLE WITHIN FINISH SPACE (E.G., WINDOW SILLS)

- ARCHITECTURAL PRECAST CONCRETE
- CAST STONE MASONRY
- RIGID INSULATION
- BATT INSULATION
- SPRAYED POLYURETHANE FOAM
- WOOD SHIM
- WOOD BLOCKING - CONTINUOUS
- FINISHED WOOD
- PLYWOOD
- GYPSUM BOARD / SHEATHING
- STONE

Order Plans @ WWW.LDLine.com

MOSELEYARCHITECTS
6510 ARDREY KELL ROAD, THE HUB AT WAVERLY, SUITE 425 - CHARLOTTE, NC 28277
PHONE (704) 846-3700 FAX (704) 846-3704
MOSELEYARCHITECTS.COM

STATE OF SOUTH CAROLINA — REGISTERED ARCHITECT — DANIEL R. MACE — Fort Mill, SC — 4202 — 10-30-2020

MARION COUNTY LEC

591492
MARION COUNTY
2715 EAST HWY 76, MULLINS, SC 29574

PROJECT NO: 591492	
DATE:	OCTOBER 30, 2020
REVISIONS	
DATE	DESCRIPTION

GENERAL ARCHITECTURAL INFORMATION

A0.1

11/2/2020 8:09:17 AM