





SCHEDULE OF FASTENERS		
NO. REQ'D	DESCRIPTION	COLOR
#4	1/4-14 x 7/8 LLLT Screw, Washer (Long Life)	SOLAR WHITE
#1E	1/4-14 x 1 1/4 LLLD Screw, Washer	STANDARD TBD
#1F	1/4-14 x 1 1/2 SD Screw, Washer (SSR Clip for Insulation >4")	STANDARD TBD
#1	1/4-14 x 1 SD Screw, Washer (SSR Clip for Insulation <=4")	SOLAR WHITE
#3	12-14 x 1 1/4 SD Screw, Washer (Long Life)	SOLAR WHITE

ROOF SHEETING PLANE 1
 PANEL TYPE = 24 GA PBR
 PANEL COLOR = SOLAR WHITE
 PANEL OVERHANG = 3"
 FROM OUTER STEEL

ROOF SHEETING PLANE 2
 PANEL TYPE = 24 GA DOUBLE LOK
 PANEL COLOR = STANDARD TBD
 PANEL OVERHANG = 4 1/2"
 FROM OUTER STEEL

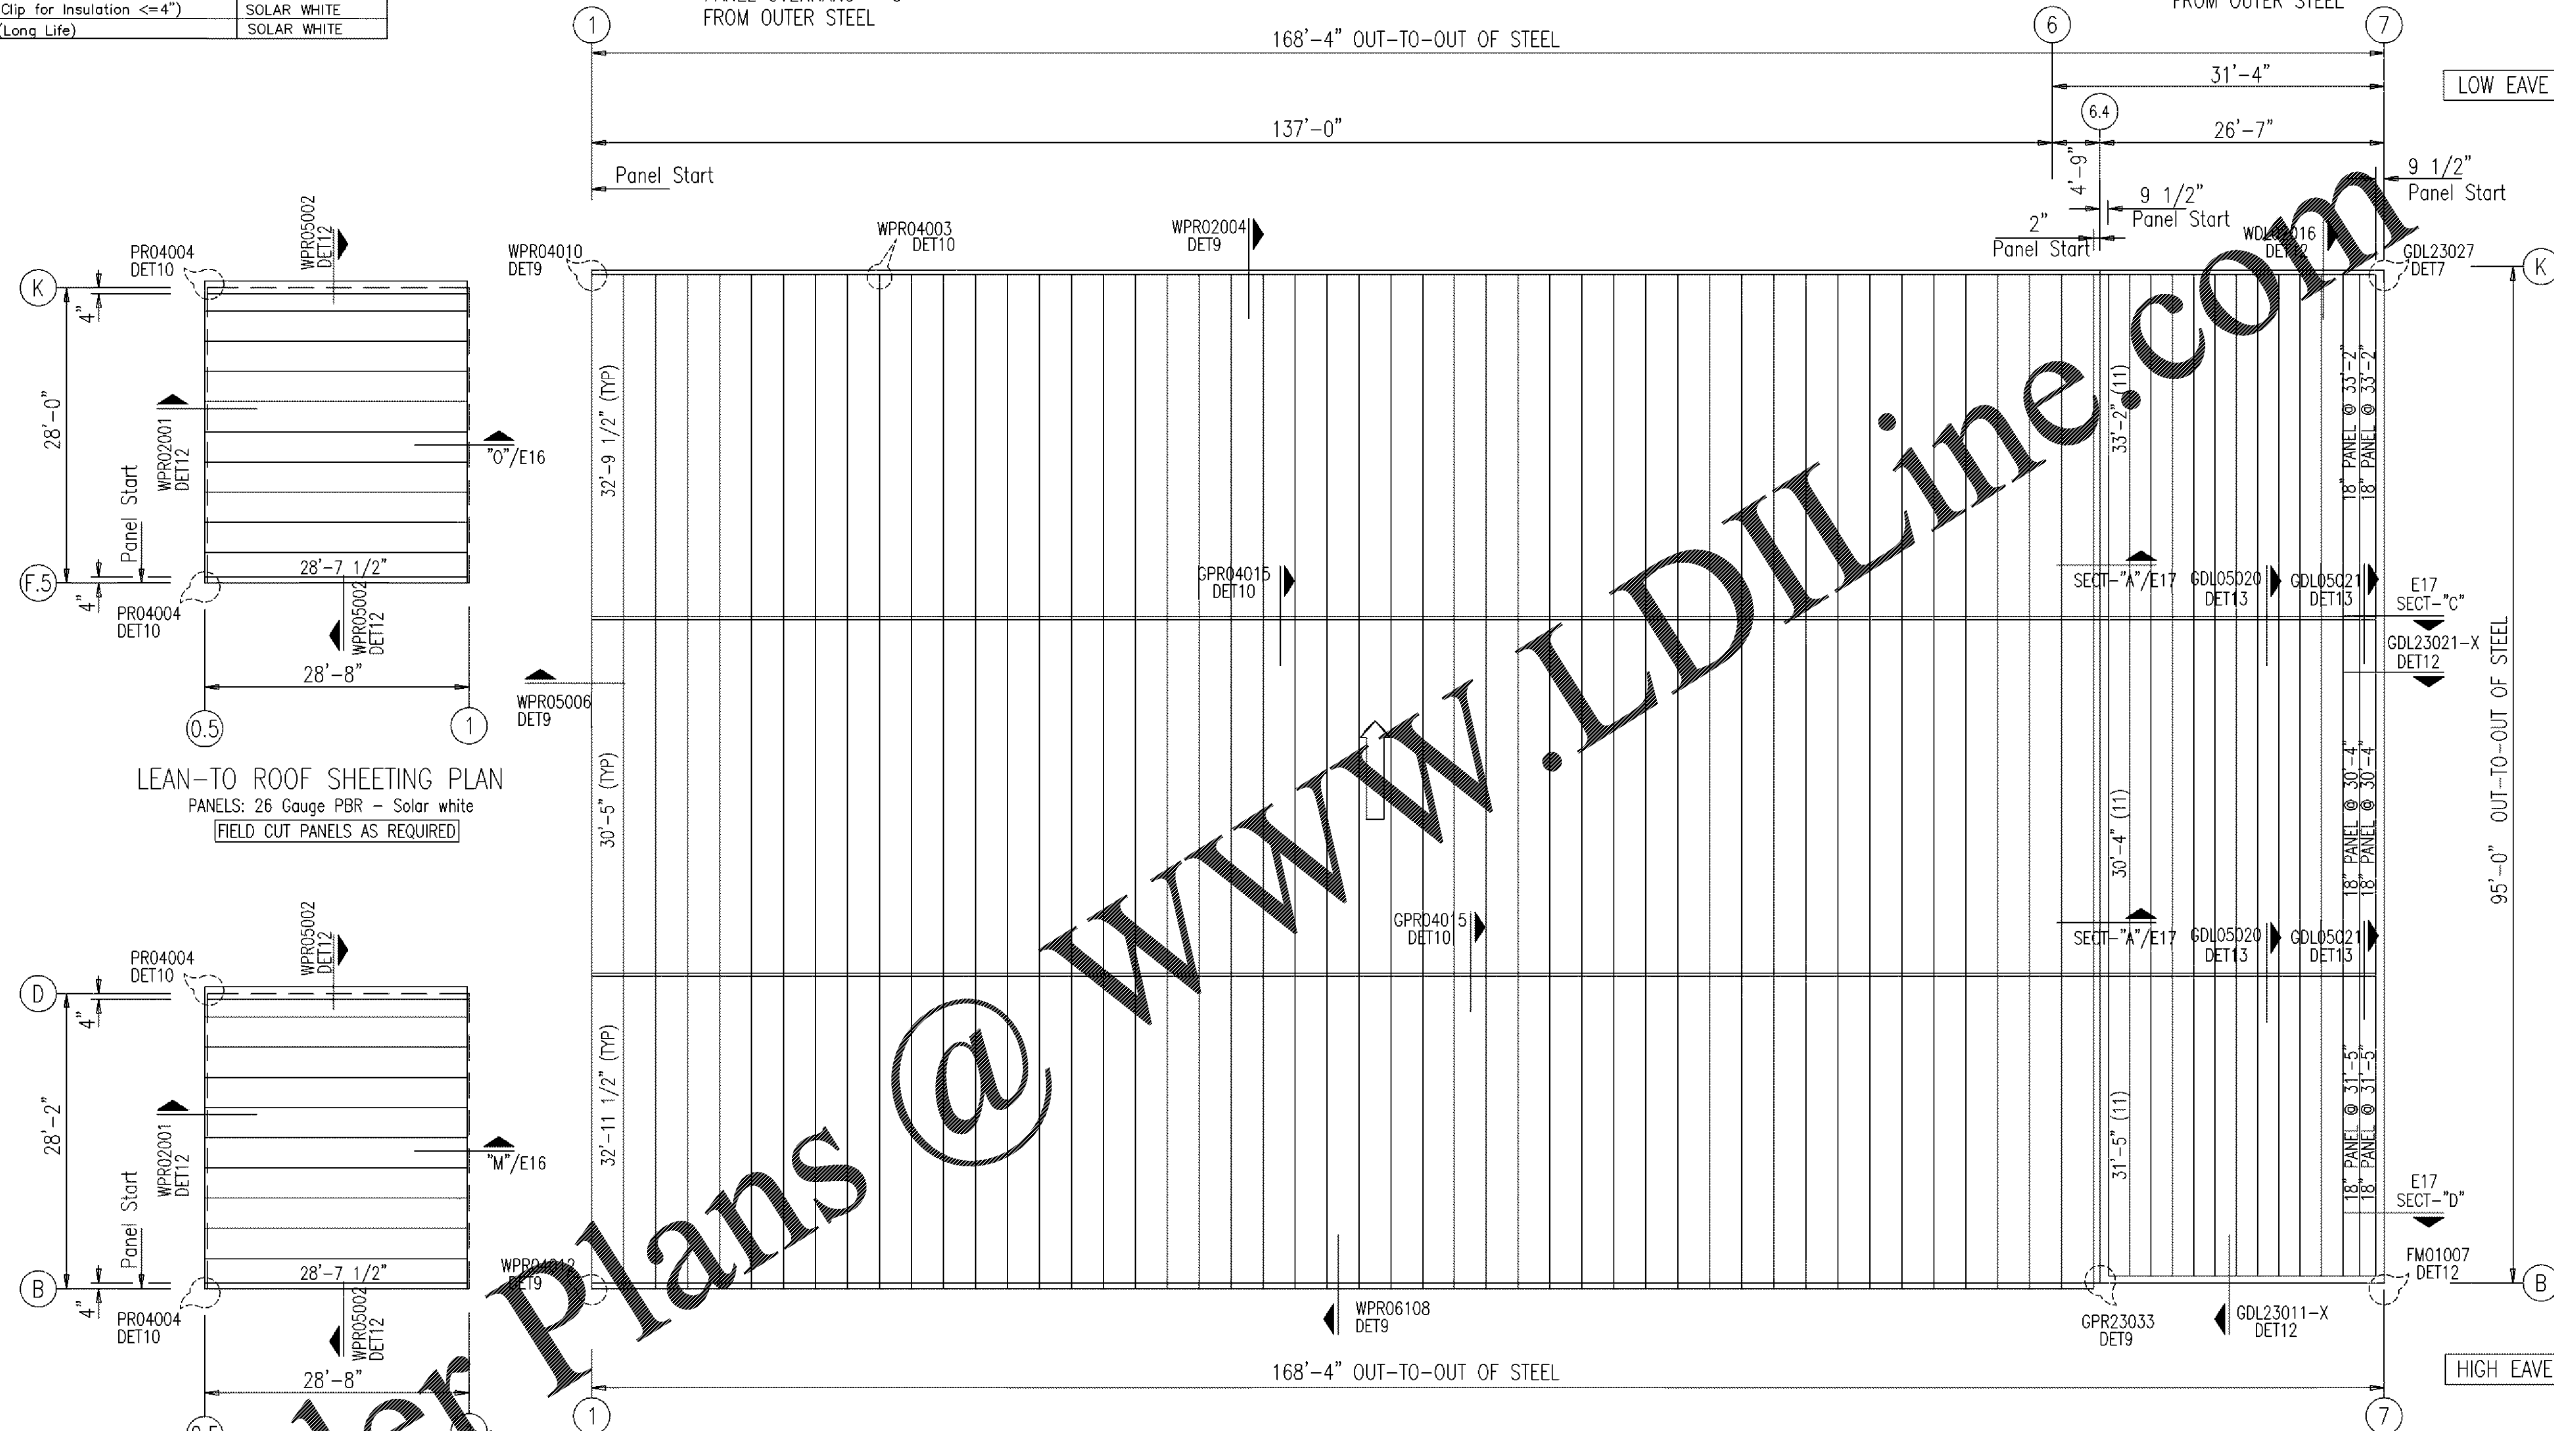

LEAN-TO ROOF SHEETING PLAN
 PANELS: 26 Gauge PBR - Solar white
 FIELD CUT PANELS AS REQUIRED

LEAN-TO ROOF SHEETING PLAN
 PANELS: 26 Gauge PBR - Solar white
 FIELD CUT PANELS AS REQUIRED

ROOF SHEETING PLANE 1
 PANEL TYPE = 24 GA PBR
 PANEL COLOR = SOLAR WHITE
 PANEL OVERHANG = 2"
 FROM OUTER STEEL

ROOF SHEETING PLAN

Order Plans @ WWW.LDILine.com

- SEE DP00020/DET11 (BUILDING-A)
 DOWNSPOUTS AT BUILDING A WALL SWC ARE TO BE PLACED AT A SPACING NOT TO EXCEED 36'-0" WITH A DOWNSPOUT WITHIN 18'-0" OF EACH END OF THE GUTTER RUN.
- SEE DP00001/DET11 (BUILDING-B)
 DOWNSPOUTS AT BUILDING A WALL SWC ARE TO BE PLACED AT A SPACING NOT TO EXCEED 28'-0" WITH A DOWNSPOUT WITHIN 19'-0" OF EACH END OF THE GUTTER RUN.
- SEE DP00001/DET11 (BUILDING-C)
 DOWNSPOUTS AT BUILDING A WALL SWC ARE TO BE PLACED AT A SPACING NOT TO EXCEED 28'-0" WITH A DOWNSPOUT WITHIN 19'-0" OF EACH END OF THE GUTTER RUN.

- NOTE:
1. Roof curbs are approximate and may be adjusted for location
 2. Please ref. for Roof curbs sheet.

CK'd	PNR	BNS	FOR ERECTOR INSTALLATION

Description	Date	Revision
FOR ERECTOR INSTALLATION	05/22/20	0

MESCO Building Solutions
 Irving, TX 75061
 5244 Bear Creek Court
 Voice 214-667-9999 Fax 214-667-9737

Customer:
 CROSS DEVELOPMENT LLC
 4386 MARSH RIDGE RD
 CARROLLTON, TX 75010-4447 US
 MEGAN WEREN

Project Name & Location:
 CC FIVE FORKS SC
 CROSS DEVELOPMENT
 1215 E BUTLER RD
 GREENVILLE, SC 29607-9911 US

Drawing Status:
 Preliminary (Not For Construction)
 For Approval
 For Erector Installation

Scale: NOT TO SCALE
 Drawn by: BNS 05/22/20
 Checked by: PNR 05/22/20
 Project Engineer: SH
 Job Number: 17-B-60327
 Sheet Number: E4

The engineer whose seal appears hereon is an employee for the manufacturer for the materials described herein. Said seal or certification is limited to the products designed and manufactured by manufacturer only. The undersigned engineer is not the overall engineer of record for this project.

Drawing has been digitally signed.

Jason Speagle
 May 26, 2020