


NOTE: PAYMENT FOR WOVEN WIRE FENCE INCLUDES ALL STRANDS OF BARBED WIRE SHOWN AT TOP OF AND AT BOTTOM OF WOVEN WIRE FENCE.

- GENERAL NOTES:**
- FENCE MAY BE ANGLED TO EDGE OF CULVERTS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. THE DESIGNATION OF THIS DETAIL ON THE PLANS WILL BE ON THE BASIS OF A SAFETY EVALUATION.
  - A CHANGE IN TYPE MATERIAL FOR LINE POST CONSTRUCTION WILL ONLY BE ALLOWED AT NATURAL BREAKS IN THE FENCE LINE SUCH AS GRADE SEPARATIONS, INTERCHANGES, AND BRIDGES.
- TIMBER POST NOTES:**
- DIMENSIONS SHOWN AS DIAMETERS OF ROUND POSTS ALSO APPLY TO EDGE WIDTH OF SQUARE POSTS.
  - AT ABRUPT CHANGES IN GRADE, STAPLE EVERY LINE WIRE.
  - TIMBER POSTS TO BE SET BY DRIVING OR DRILLING POST HOLES.
  - USE 9 GAUGE GALVANIZED STAPLES 1-1/2" LONG FOR TIMBER POSTS AT APPROACH POST, STAPLE EVERY LINE WIRE IN TOP HALF AND ALTERNATE LINE WIRES IN BOTTOM HALF, SEE STAPLING DETAIL.
  - ALL TIMBER POSTS AND BRACING ARE TO BE SEASONED AND PRESERVATIVE TREATED IN ACCORDANCE WITH SECTION B63 OF THE STANDARD SPECIFICATIONS.
  - THE CONTRACTOR WILL BE ALLOWED TO SUBSTITUTE 4 INCH NOMINAL DIMENSION LINE POSTS FOR THE DETAILS.
  - STUDDED STEEL "T" LINE POSTS MAY BE USED WITH WOODEN PULL, CORNER, END, APPROACH, AND ANGLE POSTS.
  - SQUARE WOODEN LINE POSTS CAN BE USED IN COMBINATION WITH ROUND WOODEN PULL, CORNER, END APPROACH, AND ANGLE POSTS.
- STEEL POST NOTES:**
- SET PULL, CORNER, END AND APPROACH POST IN CONCRETE.
  - SECURE EVERY LINE WIRE AT STEEL CORNER, END, ANGLE AND PULL POSTS AT STEEL LINE POSTS. FASTEN EVERY LINE WIRE IN TOP HALF OF FENCE, ALTERNATE LINE WIRES IN BOTTOM HALF.

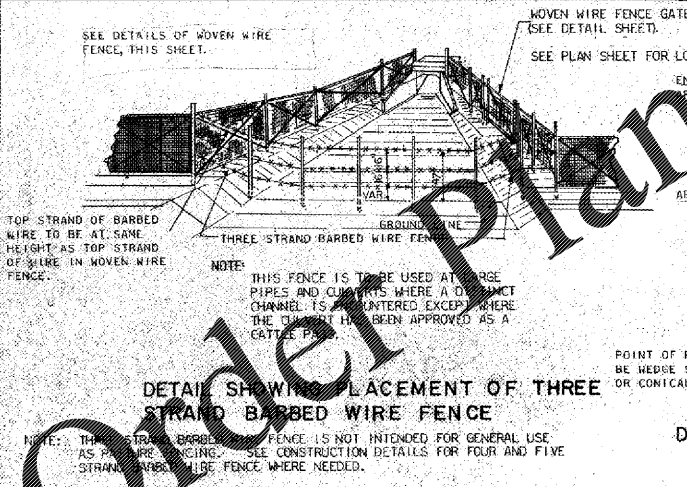

**INFRASTRUCTURE CONSULTING & ENGINEERING**  
4940 PEACHTREE INDUSTRIAL BLVD, SUITE 310  
NORCROSS, GEORGIA 30071

NOT TO SCALE

REVISION DATES		CONSTRUCTION DETAILS	
		SR 18 BRIDGE REPLACEMENT @ LONG CREEK TROUP COUNTY	
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	40-0004	
CORRECTED:	DATE:		
VERIFIED:	DATE:		