

Order Plans @ www.LDILine.com

PLUMB - FIXTURE CONNECTION SCHEDULE						
EQUIP NO.	DESCRIPTION	MINIMUM CONNECTION SIZE				NOTES
		WASTE	VENT	CW	HW	
DF-1	ELECTRIC WATER COOLER	1 1/2"	1 1/2"	1/2"	---	INTERIORS
DF-2	ELECTRIC WATER COOLER - ADA	1 1/2"	1 1/2"	1/2"	---	INTERIORS
L-1	LAVATORY - JUNIOR	1 1/2"	1 1/2"	1/2"	1/2"	INTERIORS
L-2	LAVATORY - PUBLIC - ADA	1 1/2"	1 1/2"	1/2"	1/2"	INTERIORS
L-3	LAVATORY - JUNIOR	1 1/2"	1 1/2"	1/2"	1/2"	INTERIORS
MR-1	MOP SINK	3"	2"	1/2"	1/2"	INTERIORS
P7H	SINK - HAND	1 1/2"	1 1/2"	1/2"	1/2"	INTERIORS
SK-1	SINK - CLASSROOM	1 1/2"	1 1/2"	1/2"	1/2"	INTERIORS
WB-1	WASHER CONNECTION BOX	2"	2"	1/2"	1/2"	INTERIORS
WC-1	WATER CLOSET - JUNIOR	4"	2"	1/2"	---	INTERIORS
WC-2	WATER CLOSET - PUBLIC - ADA	4"	2"	1/2"	---	INTERIORS

PLUMB - WATER HEATER SCHEDULE											
EQUIP NO.	LOCATION	STORAGE CAPACITY (GAL)	RECOVERY (GPH)	TEMPERATURE		ELECTRICAL				NOTES	
				DISC. (F)	RISE (F)	KW	NO. ELEMENTS	VOTAGE	PHASE		
EWH-1	LAUNDRY	119	285	140	80	24 W	0	0	0 V		

PLUMB - HOT WATER RETURN PUMP SCHEDULE										
EQUIP NO.	LOCATION	SERVICE	TYPE OF PUMP	FLOW (GPM)	HEAD (FT)	RPM	ELECTRICAL			NOTES
							HP	VOLTAGE	PHASE	
HWRP-1	LAUNDRY	HOT WATER		0	0	0		0 V		


PLUMB - MIXING VALVE SCHEDULE							
EQUIP NO.	LOCATION	TYPE	SIZE	FLOW (GPM)	PRESS DROP (PSI)	MIXED WATER TEMP	NOTES
				0	0	120 F	
MV-1		THERMOSTATIC	0"	0	0	120 F	

PLUMB - DRAIN SCHEDULE					
EQUIP NO.	TYPE	STRAINER/GRAB	FINISH	MIFAB	NOTES

JOB NUMBER: 19221
CHECKED BY: Checker

PLANNING
ARCHITECTURE
INTERIORS

CALBERT
DESIGN GROUP

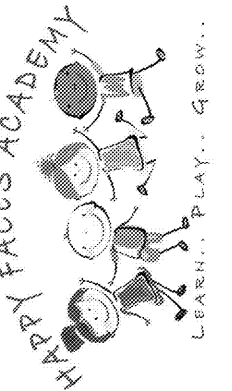

PROJECT LOCATION:
2865 WEBB ROAD
MILTON, GA 30004

REVISIONS		
NO	DATE:	DESCRIPTION:

THOMPSON EHLE CO.
50 TECHNOLOGY PKWY
PEACHTREE CORNERS, GA 30092
Tel: 404-266-1400
TEC #22021

SCHEDULES - PLUMBING
P0.2
DATE 11/16/17