


UPPER FLOOR PLUMBING DEMOLITION PLAN

NOT TO SCALE



EXISTING CONDITIONS DRAWING IS FOR REFERENCE PURPOSES ONLY. DEMOLITION IS SHOWN. OTHER NOTES ON PLANS APPLY TO PREVIOUS PROJECTS AND DO NOT REPRESENT NEW WORK EXCEPT AS SHOWN ON REVISED PLANS. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING ANY WORK.


DEMOLITION NOTES

- REMOVE EXISTING KITCHEN PLUMBING EQUIPMENT AND ASSOCIATED WATER, WASTE, GAS AND/OR VENT PIPING ETC., NOT BEING USED IN RENOVATION. CAP ANY UN-USED REMAINING PIPING BENEATH/BEHIND NEW FINISHED SURFACES. PATCH/REPAIR SURFACES AS NEEDED.
- REMOVE EXISTING WATER HEATER PLUMBING AND ASSOCIATED WATER, WASTE, GAS AND/OR VENT PIPING ETC., NOT BEING USED IN RENOVATION. CAP ANY UN-USED REMAINING PIPING BENEATH/BEHIND NEW FINISHED SURFACES. PATCH/REPAIR SURFACES AS NEEDED.
- REMOVE EXISTING ELECTRIC WATER COOLER. CAP EXISTING WASTE & WATER PIPING BEHIND WALL PATCH/ REPAIR WALL TO MATCH EXISTING/NEW FINISHES.
- PROFESSIONALLY CLEAN FIXTURE AND REPAIR ANY PARTS NOT FUNCTIONING AS NEW. REPLACE ALL SEALS, FLUSH VALVE, TRIM, AND SUPPORT BOLTS. REMOVE AND RESET EXISTING FIXTURE. COORDINATE WITH ENGINEER.


VERIFY DISPOSAL OF EXISTING EQUIPMENT WITH OWNER

GENERAL:


- CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND EQUIPMENT PRIOR TO BIDDING. THIS SHALL INCLUDE ALL ITEMS TO BE REMOVED OR RELOCATED, ALL ELECTRICAL, ALL REFRIGERANT PIPING, CONTROLS, ETC.
- PATCH/REPAIR ALL OPENINGS LEFT ABANDONED DUE TO THE REMOVAL OF ALL EQUIPMENT (UNIT, DUCT, PIPING, ELECTRICAL, ETC.) PATCH/REPAIR ALL SURFACES TO MATCH EXISTING.
- VERIFY DISPOSITION OF ALL EQUIPMENT WITH OWNER. INCLUDE ALL COSTS ASSOCIATED WITH COMPLETE REMOVAL AND DISPOSAL IN ACCORDANCE WITH CITY, STATE, AND FEDERAL REGULATIONS.
- REPAIR/REPLACE ANY EXISTING EQUIPMENT DAMAGED DURING DEMOLITION.
- PATCH/REPAIR WALLS, FLOOR, CEILING, ETC. TO MATCH EXISTING.
- PROTECT ALL EXISTING BUILDINGS AND WORK TO REMAIN, INCLUDING ALL EXISTING STRUCTURE, FINISHES, AND MATERIALS AT ALL TIMES FROM DAMAGE DUE TO WORK UNDER THIS CONTRACT OR FROM DAMAGE DUE TO EXPOSURE TO THE ELEMENTS. ANY SUCH DAMAGE WILL BE REPAIRED, PATCHED, OR REPLACED TO MATCH ORIGINAL EXISTING CONDITION.
- TEMPORARILY REMOVE EXISTING ITEMS TO REMAIN IF REQUIRED TO PROPERLY INSTALL NEW WORK. UPON COMPLETION OF DEMOLITION OR NEW WORK, RE-INSTALL SUCH REMOVED ITEMS TO MATCH ORIGINAL EXISTING CONDITION.
- ALL BIDDERS SHALL VISIT THE JOB SITE PRIOR TO SUBMITTING A BID TO DETERMINE THE TOTAL SCOPE OF WORK, AND TO COMPLETELY FAMILIARIZE THEMSELVES WITH THE PROJECT, INCLUDING ALL EXISTING CONDITIONS, BUILDINGS, STRUCTURE, FINISHES, AND MATERIALS IN ALL AREAS AFFECTED BY WORK UNDER THIS CONTRACT.

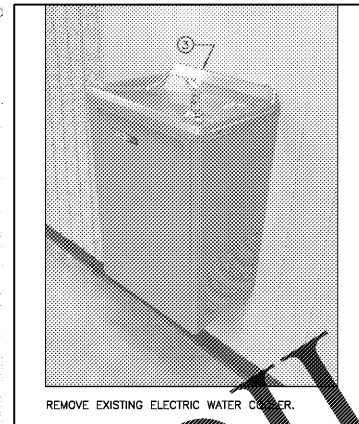


1 EXISTING PLUMBING
NOT TO SCALE

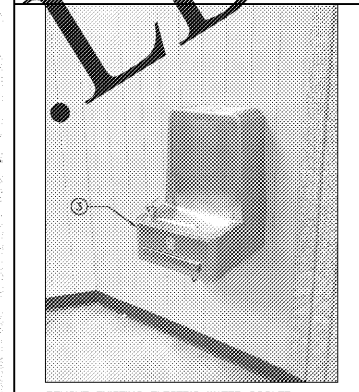


2 EXISTING PLUMBING
NOT TO SCALE

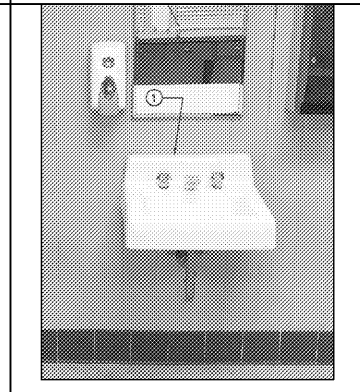


3 EXISTING PLUMBING
NOT TO SCALE

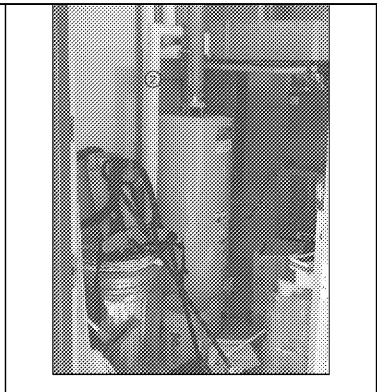

4 EXISTING PLUMBING
NOT TO SCALE

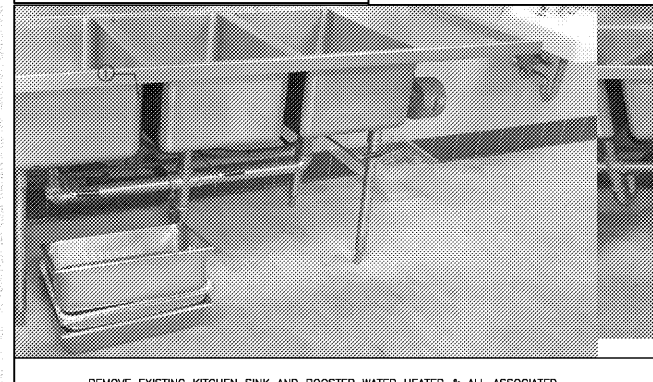

5 EXISTING PLUMBING
NOT TO SCALE

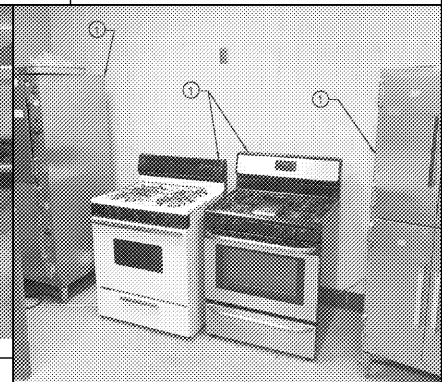


6 EXISTING PLUMBING
NOT TO SCALE



Facilities Management
1161 West Samford Avenue
Auburn University, AL 36849
Phone: (334) 844-4810
Fax: (334) 844-9458
Safety is our first priority.
Think Safety. Act Safely.

No.	Revision	Date



JMR-H Architecture, P.C.
445 Dexter Avenue
Montgomery, AL 36104
Phone: (334) 420-5672
Fax: (334) 420-5692
JMR-H Project Number: 19-968
Drawn By: DT

Auburn University Building
Ham Wilson Arena Renovations
Project Number 19-451

SHEET TITLE:
UPPER FLOOR
PLUMBING
DEMOLITION PLAN

DRAWN BY:
RDL
CHECKED BY:
RDW
DATE:
JANUARY 21, 2021
FILE NUMBER:

PROJECT NUMBER:
19-451
SHEET NUMBER:
P2.1
57 of 61

WHORTON ENGINEERING, INC.
HVAC - PLUMBING - PROCESS CONTROL

Randee Whorton
RANDALL WHORTON, P.E.
PHONE: (256) 820-9897

DATE: 01-20-2021
25 SUMMERALL GATE ROAD
ANNISTON, ALABAMA 36205

WHORTON ENGINEERING PROJECT NO. 19212

