


Order Plans @

WWW.LDLINE.COM

ROOM FINISH SCHEDULE: Winston-Salem Fire Station 3											
ROOM No.	FLOOR	FINISH	BASE	CEILING	WALL	WALL	WALL	WALL	WALL	WALL	WALL
No.											
100	HALL	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
101	TRAGE	CP	F3	CT	GB	8'-0"	CMU	P	W1	CMU	P
102	NOT USED										
103	NOT USED										
104	NOT USED										
105	OFFICE	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
106	KITCHEN	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
107	DAYROOM	CP	RE	ACT	9'-0" C1	CMU	P				
108	OFFICE	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
109	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
110	OFFICE	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
111	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
112	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
113	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
114	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
115	HALL	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
116	SHOWER	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
117	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
118	HALL	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
119	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
120	CLUBHOUSE	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
121	BEDROOM	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
122	LAUNDRY	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
123	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
124	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
125	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
126	HALL	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
127	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
128	CLOSET	CP	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
129	TURLET	CT	F3	CT	ACT	8'-0" C2	GB	P	W2	GB	P
130-139	NOT USED										
140	APPARATUS	CP	RE	PAINT	MA	CMU	P				
141	SOAK ROOM	CP	RE	GB	9'-0"	CMU	P				
142	STORAGE	CS	F1	GB	9'-0"	CMU	P				
143	TURNOUT	CS	F1	GB	9'-0"	CMU	P				
144	EXERCISE	RUBBER	RE	ACT	9'-0" C1	GB	P	CMU	P	GB	P
145	FIBER/SELECT	CS	F1	RE	ACT	9'-0" C1	GB	P	CMU	P	GB
146	MECHANICAL	CS	F1	None							

ROOM FINISH SCHEDULE KEY NOTES:											
1	NOT USED	ACT	1	See Specs.	W1	Ceramic tile on cement board to 8'-0" all					
2	NOT USED	CT	1	See Specs.	W2	Ceramic tile on cement board to 4'-0" all					
3	NOT USED	CS	1	See Specs.	W3	Ceramic tile on cement board to 8'-0" all					
4	NOT USED	CS	1	See Specs.	W4	CT backslash between cabinets					
5	NOT USED	CS	1	See Specs.	W5	Ceramic tile on CMU to 4'-0" all					
6	NOT USED	CS	1	See Specs.	W6	Install CT in shower to 9'-0"					

ABBREVIATIONS											
ACT	Acoustic Tile	EPX	Epoxy Floor System	FT	Porcelain Tile						
AG	Approved	FRP	Fiberglass Reinforced Panel	GT	Glazed Quarry Tile						
AP	Approved	FRP	Fiberglass Reinforced Panel	R	Rasboard						
AS	Approved	FRP	Fiberglass Reinforced Panel	S	Sealed						
BA	Backer Unit	G	Gravel	SC	Stained concrete						
BU	Backer Unit	GL	Glazing	SH	Stonehard						
CA	Ceramic	GW	Gypsum Wall Board	TEZ	Terrazzo						
CB	Ceramic	MTL	Metal	VCT	Vinyl Composite Tile						
CC	Ceramic	P	Painted	VP	Vinyl Plaster						
CD	Ceramic	PC	Painted concrete	VV	Vinyl Wallcovering						

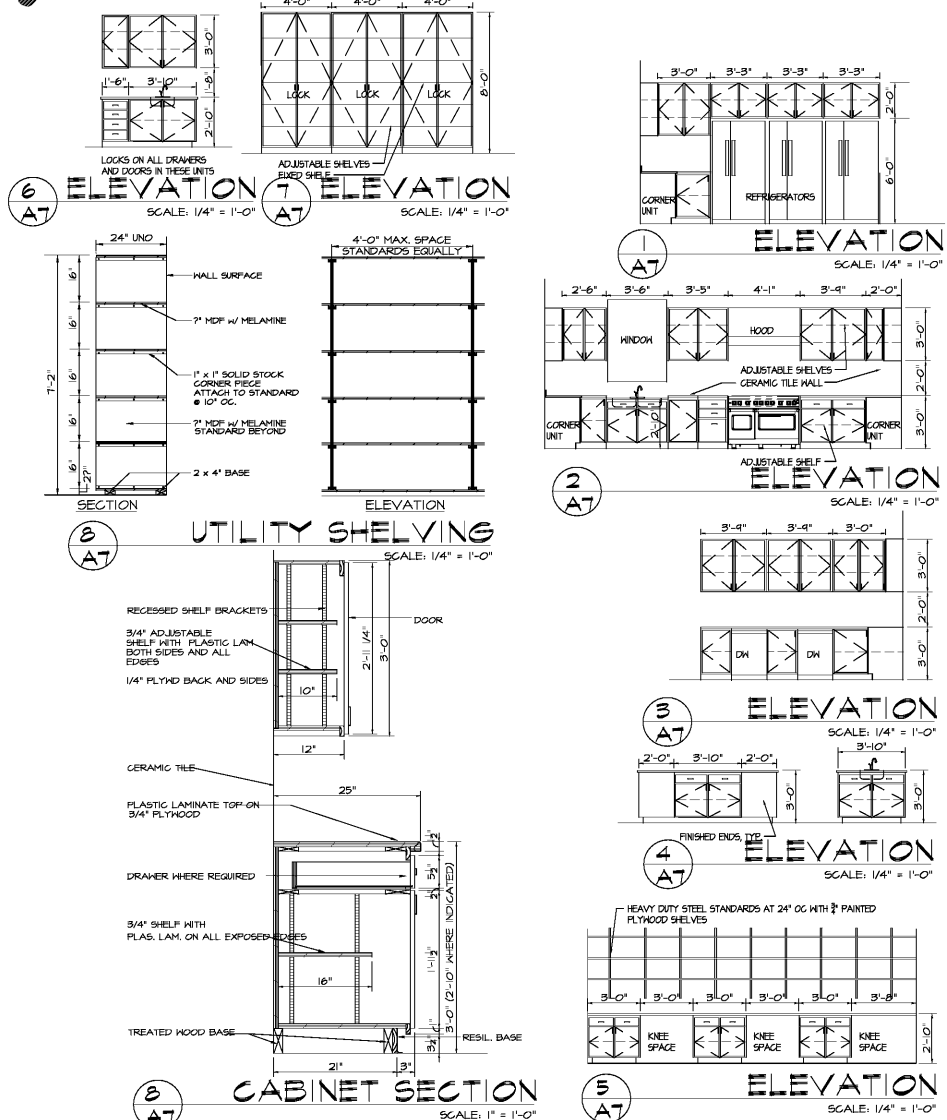

City of Winston-Salem  
FIRE STATION 3  
WINSTON-SALEM • NORTH CAROLINA



THESE DRAWINGS ARE INSTRUMENTS OF SERVICE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT UNLESS THE PROJECT FOR WHICH THEY ARE MADE IS COMPLETED OR NOT, THEY ARE NOT TO BE USED BY THE OWNER OR ANY OTHER PERSON OR FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF ERSOY BRAKE APPLBYARD ARCHITECTS P.A.

DRAWN: .KEB  
CHECKED: .KEB  
COMM: .RCH  
DATE: 02-12-21  
REVISION: A7 OF 1