


Order Plans @ www.LDILine.com

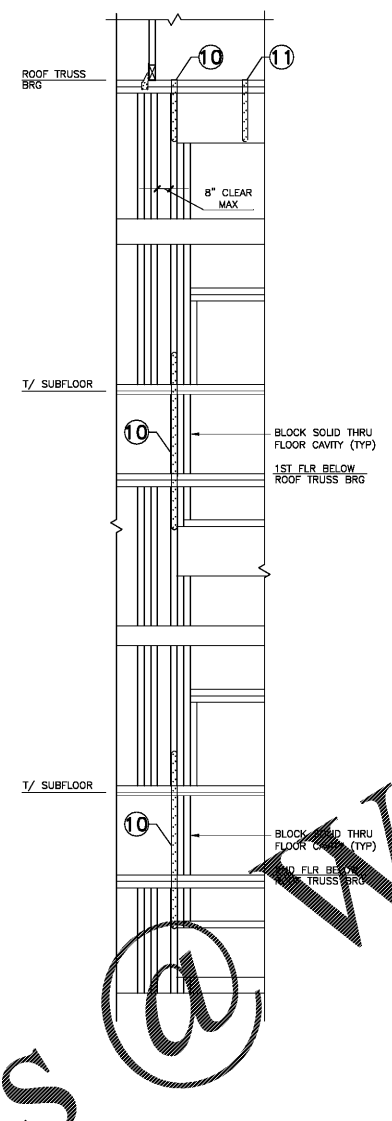


UPLIFT ANCHORAGE AT OPENINGS ADJACENT TO BUILDING CORNER

ROOF TRUSS BEARING WALL STRAPPING SCHEDULE ¹

CLEAR SPAN	10	11
UP TO 3'-0" OPENING	N/A	N/A
UP TO 6'-2" OPENING	CS16 STRAP FLR-TO-FLR W/ 9-10d EA END	CS16 STRAP CTR'D ON BEAM W/9-10d EA END
UP TO 12'-5" OPENING	2-CS16 STRAP FLR-TO-FLR W/ 12-10d EA END	CS16 STRAP Ø 3/8" O.C. MAX W/9-10d NAILS EA END

SCHEDULE FOOTNOTES:
 1. PROVIDE STRAPPING WHERE LESS THAN 8" CLEAR IS PROVIDED BETWEEN KING STUDS AND ADJACENT WALL STUDS. IF 8" OR MORE IS PROVIDED, THEN REFER TO SCHEDULE AND ELEVATION DETAILS ON S3.0a FOR UPLIFT ANCHORAGE.
 2. STRAPPING AT UPPER LEVEL SHALL BE WRAPPED OVER AND AROUND DOUBLE TOP PLATE AS REQUIRED TO ACHIEVE MINIMUM NAILING PER SCHEDULE.



ZPA
POWELL & POWELL ARCHITECTURE
 5736 Westchester Road, Suite 100
 Memphis, TN 38119
 Phone: 901.723.4214
 www.zpa.com
 LICENSE #19172

DAVIS & CHURCH
STRUCTURAL ENGINEERS
 7905 Westside Parkway, Ste. 200
 Alpharetta, GA 30009
 (770) 672-1212

Project: 1928.00
 CADD File:
 Drawn By: AVG
 Checked By: TQ

Permit Release:
 May 15, 2020
 Construction Release Set:
 May 15, 2020

Revisions

No.	Date	Description

ASI / RFI Revisions

No.	Date	Description

© 2019 Powell & Powell Architecture, LLC
 Drawings and specifications are and shall remain the property of Powell & Powell Architecture, LLC and shall not be used or reproduced in whole or part in any form without prior written consent of Powell & Powell Architecture, LLC.

Borough 33
 an Apartment Community by
 33 Broad MF, LLC
 in Chattanooga, Tennessee

Drawing Title:
 Roof Truss Bearing
 Wall Anchorage Details

S3.0b

ISSUED FOR CONSTRUCTION